

CRAFTY XR, YELLOW/RACING SILVER, 2023

obj. č. 010.23344

Doporučená cena
212.499 Kč



Technické specifikace

vyroběné velikosti

S: 380mm / M: 420mm / L: 450mm / XL: 490mm

vidlice

Öhlins RXF 38 M.2 29, 170mm, TTX18 Twin Tube cartridge, tapered steerer tube, Boost 15x110mm axle, offset 44mm. Settings: high speed compression lever with climb mode, low-speed compression, rebound, air preload, ramp chamber

přehazovačka

Sram GX Eagle, Type 3 roller bearing clutch, cage lock, 1x12s, X-Actuation 1:1

brzdové páčky

Sram Code R, tool-free reach adjust

řídítka

Onoff Sulfur 1.0 double butted 6061 alloy, rise: 20mm, width: 800mm, 9° backsweep, 5° upsweep, 31.8mm barbore

sedlovka

Onoff Pija dropper internal, diameter 31.6mm, S size: 405x95-125mm, M size 458x120-150mm, L size: 498x140-170mm, XL size: 498x140-170mm

náboj přední

Mavic, Boost 15x110mm, IS 6 bolts

řetěz

Sram NX Eagle, 12s, Powerlock

dráty

Mavic straight-pull double butted, contactless lacing

pláště

Maxxis Minion DHF 29x2.6, tubeless ready, 3C MAXX TERRA, EXO+ Protection, 120TPI, folding bead, Maxxis Minion DHR II 29x2.6, tubeless ready, 3C MAXX TERRA, EXO+ Protection, 120TPI, folding bead

obj.c.

010.23344

rám

Crafty 6061 Alloy Stealth Evo, e-Bike Optimized Zero Suspension System, 150mm travel, Forward Geometry, internal non-removable battery, Boost 12x148mm rear axle, tapered head tube, one-piece Monoblock upper link, HHG internal cable routing, MAX capacity sealed bearings, oversize 17mm axles, integrated dropout speed sensor, exclusive plastic motor covers.

hlavové složení

Onoff Saturn tapered for 1-1/8" to 1-1/2" head tube, ACB sealed bearings, top 41x30.2x7x45°x45°, bottom 51.9x40x8x45°x45°

řazení

Sram Trigger GX Eagle, 12s, X-Actuation 1:1, single click

kliky

Race Face Aeffect ebike, 165mm

představec

Onoff Sulfur FG 30mm 0°, 6061 forged alloy, 31.8mm barbore

sedlo

FIZIK Terra Aidon X5 145mm

náboj zadní

Mavic, Boost 12x148mm, ID360 Ratched system, IS 6 bolts, XD freehub

kazeta

Sram XG-1275, 10-52T, 12s

ráfky

Mavic E-Deemax S 29, 30mm internal width, Maxtal welded, PFP, tubeless, 28 spokes

a151

010.23344

gripy

Onoff Desert, 1lock-on, 135mm

tlumič

Öhlins TTX Air 205X65mm. Settings: high speed compression lever with climb mode, low-speed compression, rebound, air preload. Trunnion top mount, 25x10mm bottom bushings

zadní brzda

Sram Code R, oversized 4-piston caliper, Centerline 200mm IS 6 bolts one-piece rotor, steel-backed metal sintered pads

převodník

Sram X-Sync 2 Eagle 34T, steel, narrow-wide, 104 BCD

motor+baterie

Bosch Performance Line CX Cruise (25Km/h) Smart System , Bosch Powertube 750Wh, Bosch Kiox 300 / Bosch Mini Remote / Bosch System Controller

přední brzda

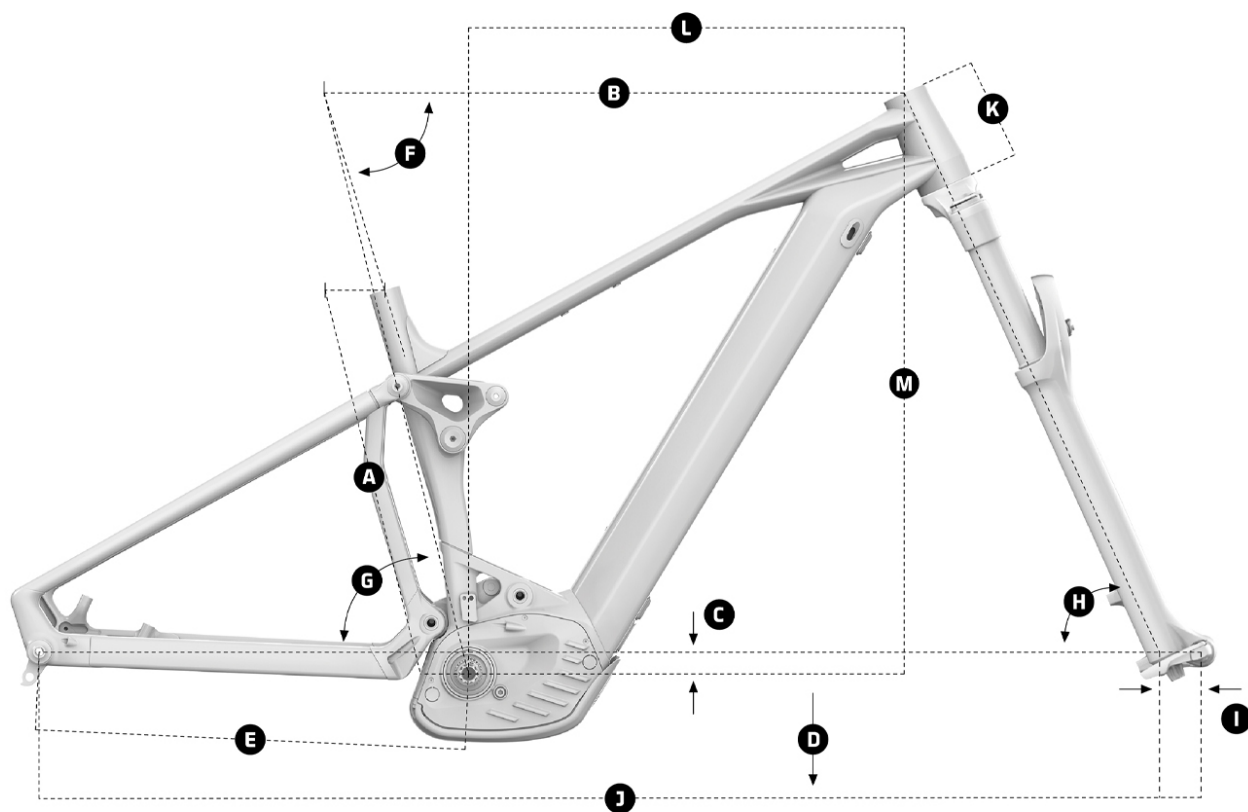
Sram Code R, oversized 4-piston caliper, Centerline 200mm IS 6 bolts one-piece rotor, steel-backed metal sintered pads

nastavení tlumiče

C20 compression, R35 rebound. Volume reducers 12.000 (2xF+1D)

patka k přehazovačce

Mondraker M068

Geometrie

e-MTB ENDURO CRAFTY XR

Size	S	M	L	XL
A Seat Tube Length	380 mm	420 mm	450 mm	480 mm
B Top Tube Length	615 mm	626 mm	660 mm	680 mm
C Bottom Bracket Drop	-18	-18	-18	-18
D Bottom Bracket Height	349 mm	349 mm	349 mm	349 mm
E Chainstay Legth	455 mm	455 mm	455 mm	455 mm
F Seat Tube Angle, Actual	72,5°	72,5°	72,5°	72,5°
G Seat Tube Angle, Effective	75°	75°	75°	75°
H Head Tube Angle	64,5°	64,5°	64,5°	64,5°
I Fork Offset	44 mm	44 mm	44 mm	44 mm
J Wheelbase	1235 mm	1255 mm	1280 mm	1300 mm
K Head Tube Length	110 mm	110 mm	130 mm	130 mm
L Reach	440 mm	460 mm	480 mm	500 mm
M Stack	632 mm	632 mm	650 mm	650 mm

Fotogalerie

