

CRAFTY XR, YELLOW/RACING SILVER, 2023

obj. č: 010.23344

Doporučená cena

212.499 Kč

Akční cena

157.999 Kč



Technické specifikace

vyřáběné velikosti

S: 380mm / M: 420mm / L: 450mm / XL: 490mm

rám

Crafty 6061 Alloy Stealth Evo, e-Bike Optimized Zero Suspension System, 150mm travel, Forward Geometry, internal non-removable battery, Boost 12x148mm rear axle, tapered head tube, one-piece Monoblock upper link, HHG internal cable routing, MAX capacity sealed bearings, oversize 17mm axles, integrated dropout speed sensor, exclusive plastic motor covers.

vidlice

Öhlins RXF 38 M.2 29, 170mm, TTX18 Twin Tube cartridge, tapered steerer tube, Boost 15x110mm axle, offset 44mm. Settings: high speed compression lever with climb mode, low-speed compression, rebound, air preload, ramp chamber

hlavové složení

Onoff Saturn tapered for 1-1/8" to 1-1/2" head tube, ACB sealed bearings, top 41x30.2x7x45°x45°, bottom 51.9x40x8x45°x45°

přehazovačka

Sram GX Eagle, Type 3 roller bearing clutch, cage lock, 1x12s, X-Actuation 1:1

řazení

Sram Trigger GX Eagle, 12s, X-Actuation 1:1, single click

brzdové páčky

Sram Code R, tool-free reach adjust

kliky

Race Face Aeffect ebike, 165mm

řídítka

Onoff Sulfur 1.0 double butted 6061 alloy, rise: 20mm, width: 800mm, 9° backsweep, 5° upsweep, 31.8mm barbore

představec

Onoff Sulfur FG 30mm 0°, 6061 forged alloy, 31.8mm barbore

sedlovka

Onoff Pija dropper internal, diameter 31.6mm, S size: 405x95-125mm, M size 458x120-150mm, L size: 498x140-170mm, XL size: 498x140-170mm

sedlo

FIZIK Terra Aidon X5 145mm

náboj přední

Mavic, Boost 15x110mm, IS 6 bolts

náboj zadní

Mavic, Boost 12x148mm, ID360 Ratched system, IS 6 bolts, XD freehub

řetěz

Sram NX Eagle, 12s, Powerlock

kazeta

Sram XG-1275, 10-52T, 12s

dráty

Mavic straight-pull double butted, contactless lacing

ráfky

Mavic E-Deemax S 29, 30mm internal width, Maxtal welded, PFP, tubeless, 28 spokes

pláště


Maxxis Minion DHF 29x2.6, tubeless ready, 3C MAXX TERRA, EXO+ Protection, 120TPI, folding bead, Maxxis Minion DHR II 29x2.6, tubeless ready, 3C MAXX TERRA, EXO+ Protection, 120TPI, folding bead

a151

010.23344

obj.c. 010.23344	gripy Onoff Desert, 1lock-on, 135mm
tlumič Ůhlins TTX Air 205X65mm. Settings: high speed compression lever with climb mode, low-speed compression, rebound, air preload. Trunnion top mount, 25x10mm bottom bushings	přední brzda Sram Code R, oversized 4-piston caliper, Centerline 200mm IS 6 bolts one-piece rotor, steel-backed metal sintered pads
zadní brzda Sram Code R, oversized 4-piston caliper, Centerline 200mm IS 6 bolts one-piece rotor, steel-backed metal sintered pads	nastavení tlumiče C20 compression, R35 rebound. Volume reducers 12.000 (2xF+1D)
převodník Sram X-Sync 2 Eagle 34T, steel, narrow-wide, 104 BCD	patka k přehazovačce Mondraker M068
motor+baterie Bosch Performance Line CX Cruise (25Km/h) Smart System , Bosch Powertube 750Wh, Bosch Kiox 300 / Bosch Mini Remote / Bosch System Controller	

Geometrie

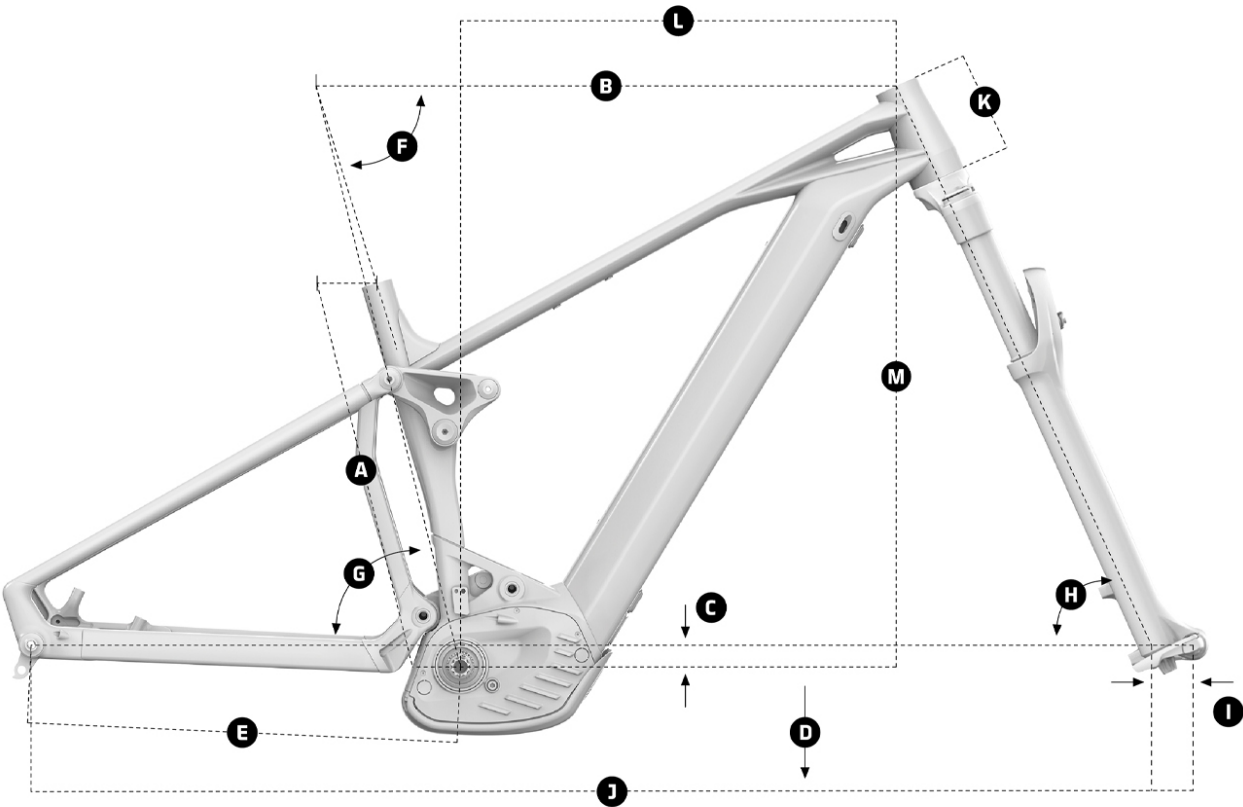

e-MTB ENDURO CRAFTY XR

Size	S	M	L	XL
A Seat Tube Length	380 mm	420 mm	450 mm	480 mm
B Top Tube Length	615 mm	626 mm	660 mm	680 mm
C Bottom Bracket Drop	-18	-18	-18	-18
D Bottom Bracket Height	349 mm	349 mm	349 mm	349 mm
E Chainstay Legth	455 mm	455 mm	455 mm	455 mm
F Seat Tube Angle, Actual	72,5°	72,5°	72,5°	72,5°
G Seat Tube Angle, Effective	75°	75°	75°	75°
H Head Tube Angle	64,5°	64,5°	64,5°	64,5°
I Fork Offset	44 mm	44 mm	44 mm	44 mm
J Wheelbase	1235 mm	1255 mm	1280 mm	1300 mm
K Head Tube Length	110 mm	110 mm	130 mm	130 mm
L Reach	440 mm	460 mm	480 mm	500 mm
M Stack	632 mm	632 mm	650 mm	650 mm

Fotogalerie

