

CRAFTY CARBON XR LTD, GLOSS AMBER CARBON/MATTE AMBER CARBON/YELLOW, 2023

obj. č.: 010.23368

Doporučená cena

299.999 Kč

Akční cena

224.999 Kč



Technické specifikace

vyráběné velikosti S: 380mm / M: 420mm / L: 450mm / XL: 490mm	hmotnost 23,2 kg
rám Crafty Stealth Air full Carbon, e-Bike Optimized Zero Suspension System, 150mm travel, Forward Geometry, internal non-removable battery, Boost 12x148mm rear axle,	vidlice Öhlins RXF 38 M.2 29, 170mm, TTX18 Twin Tube cartridge, tapered steerer tube, Boost 15x110mm axle, offset 44mm. Settings: high speed compression lever with climb mode, low-speed compression, rebound, air preload, ramp chamber
hlavové složení Acros custom for 1-1/2" head tube, angular contact bearings 40x52x7, Internal cable routing	přehazovačka Sram X01 Eagle, Type 3 roller bearing clutch, cage lock, 1x12s, X-Actuation 1:1
řazení Sram Trigger GX Eagle, 12s, X-Actuation 1:1, single click	brzdové páčky Sram Code RSC, SwingLink and lever pivot bearings, tools-free reach and contact point adjust
kliky E.13 TRS Race carbon ebike, 165mm	řídítka Onoff Krypton Carbon 1.0, rise: 25mm, width: 800mm, 9° backsweep, 5° upsweep, 31.8mm barbare
představec Onoff Krypton FG 30mm, CNC, 31.8mm barbare	sedlovka Onoff Pija dropper internal, diameter 31.6mm, S size: 405x95-125mm, M size 458x120-150mm, L size: 498x140-170mm, XL size: 498x140-170mm
sedlo FIZIK Terra Aidon X5 145mm	náboj přední Mavic, Boost 15x110mm, IS 6 bolts
náboj zadní Mavic, Boost 12x148mm, ID360 Ratchet system, IS 6 bolts, XD freehub	řetěz Sram NX Eagle, 12s, Powerlock
kazeta Sram XG-1275, 10-52T, 12s	ráfky Mavic E-Deemax S 29, 30mm internal width, Maxtal welded, PFP, tubeless, 28 spokes
pláště Maxxis Minion DHF 29x2.6, tubeless ready, 3C MAXX TERRA, EXO+ Protection, 120TPI, folding bead, Maxxis Minion DHR II 29x2.6, tubeless ready, 3C MAXX TERRA, EXO+ Protection, 120TPI, folding bead	a151 010.23368
obj.c. 010.23368	gripy Onoff Desert, 1lock-on, 135mm

tlumič

Öhlins TTX Air 205X65mm. Settings: high speed compression lever with climb mode, low-speed compression, rebound, air preload. Trunnion top mount, 25x10mm bottom bushings

přední brzda

Sram Code RSC, oversized 4-piston caliper, Centerline 200mm IS 6 bolts one-piece rotor, steel-backed metal sintered pads

zadní brzda

Sram Code RSC, oversized 4-piston caliper, Centerline 200mm IS 6 bolts one-piece rotor, steel-backed metal sintered pads

nastavení tlumiče

C20 compression, R35 rebound. Volume reducers 12.000 (2xF+1D)

převodník

Sram X-Sync 2 Eagle 34T, steel, narrow-wide, 104 BCD

patka k přehazovačce

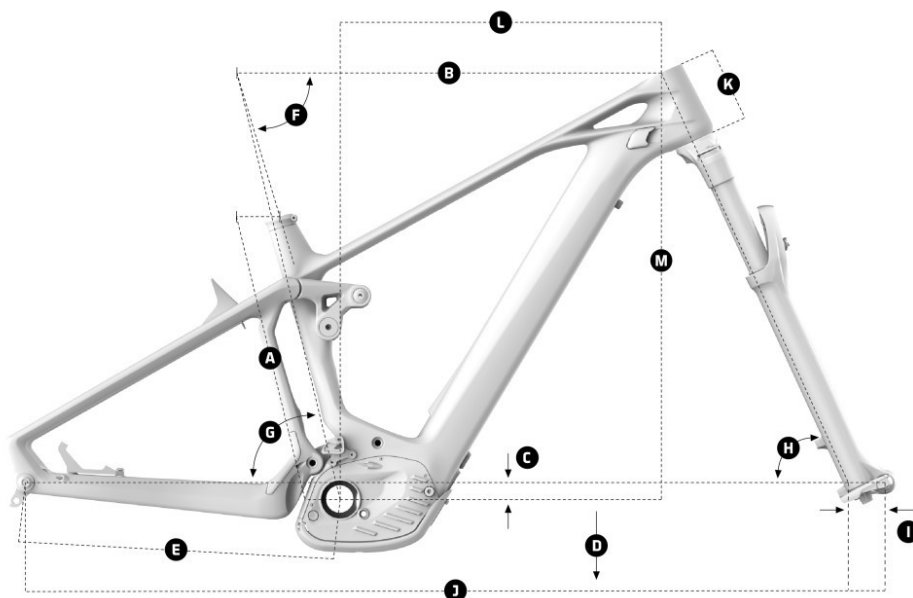
SRAM UDH

ostatní

Only available in Europe

motor+baterie

Bosch Performance Line CX-Race (25Km/h), Smart System, Bosch Powertube 750Wh, Bosch Kiox 300 / Bosch Mini Remote / Bosch System Controller

Geometrie

e-MTB ENDURO
CRAFTY CARBON XR

Size	S	M	L	XL
A Seat Tube Length	380 mm	420 mm	450 mm	480 mm
B Top Tube Length	615 mm	635 mm	660 mm	680 mm
C Bottom Bracket Drop	-17 mm	-17 mm	-17 mm	-17 mm
D Bottom Bracket Height	358 mm	358 mm	358 mm	358 mm
E Chainstay Legth	455 mm	455 mm	455 mm	455 mm
F Seat Tube Angle, Actual	72.5°	72.5°	72.5°	72.5°
G Seat Tube Angle, Effective	75°	75°	75°	75°
H Head Tube Angle	64.5°	64.5°	64.5°	64.5°
I Fork Offset	44 mm	44 mm	44 mm	44 mm
J Wheelbase	1235 mm	1255 mm	1280 mm	1300 mm
K Head Tube Length	110 mm	110 mm	130 mm	130 mm
L Reach	440 mm	460 mm	480 mm	500 mm
M Stack	632 mm	632 mm	650 mm	650 mm

Fotogalerie

