

DUSK, BLACK/DESERT GREY/ORANGE, 2023

obj. č. 010.23388

Doporučená cena

139.999 Kč

Akční cena

119.999 Kč



Technické specifikace

vyráběné velikosti

S: 380mm / M: 420mm / L: 450mm / XL: 490mm

rám

Dusk 6061 Alloy Stealth Evo, e-Bike Optimized Zero Suspension System, 150mm travel, Forward Geometry, integrated internal non-removable battery, Boost 12x148mm rear axle, tapered head tube, one-piece Monoblock upper link, HHG internal cable routing, MAX capacity sealed bearings, oversize 17mm axles, integrated dropout speed sensor.*Optional external battery

vidlice

RockShox 35 Silver TK 29, 160mm, TurnKey, Solo Air, tapered steerer tube, Boost 15x110mm axle, 35mm steel stanchions, 44mm offset. Settings: compression adjustment at low-speed to lock, rebound, air preload

hlavové složení

Onoff Saturn tapered for 1-1/8" to 1-1/2" head tube, ACB sealed bearings, top 41x30.2x7x45°x45°, bottom 51.9x40x8x45°x45°

přehazovačka

Sram SX Eagle, Type 3 roller bearing clutch, cage lock, long cage, 1x12s, X-actuation 1:1

řazení

Sram Trigger SX Eagle, 12s, X-Actuation 1:1, single click

brzdové páčky

Sram DB8, tool-free reach adjust

kliky

Shimano Steps EP801 ebike, 165mm

řídítka

Onoff Sulfur 1.0 double butted 6061 alloy, rise: 20mm, width: 800mm, 9° backsweep, 5° upsweep, 31.8mm barbore

představec

Onoff Sulfur FG 30mm 0°, 6061 forged alloy, 31.8mm barbore

sedlovka

Onoff Pija dropper internal, diameter 31.6mm, S size: 405x95-125mm, M size 458x120-150mm, L size: 498x140-170mm, XL size: 498x140-170mm

sedlo

MDK ebike black

náboj přední

Formula DC711, Boost 15x110mm, sealed bearings, IS 6 bolts

náboj zadní

Formula EHL148 Boost 12x148mm, sealed bearings, IS 6 bolts

řetěz

Sram SX Eagle, 12s, Powerlock

kazeta

Sram PG-1210, 11-50T, 12s

dráty

CN round stainless steel

ráfky

MDK-HP1 29, 30mm internal width, tubeless ready, 32 spokes

pláště

Maxxis Minion DHF 29x2.6, tubeless ready, 3C MAXX TERRA, EXO+ Protection, 120TPI, folding bead, Maxxis Minion DHR II 29x2.6, tubeless ready, 3C MAXX TERRA, EXO+ Protection, 120TPI, folding bead

a151

010.23388

obj.c.

010.23388

gripy

Onoff Twin, 1lock-on, 135mm

tlumič

RockShox Deluxe Select R DebonAir, 205x65mm. Settings: Low-speed rebound, air preload. Trunnion top mount, 25x10mm bottom bushings

přední brzda

Sram DB8, 4-piston caliper, Centerline 200mm IS 6 bolts one-piece rotor, steel-backed organic pads

zadní brzda

Sram DB8, 4-piston caliper, Centerline 200mm IS 6 bolts one-piece rotor, steel-backed organic pads

nastavení tlumiče

DebonAir Progressive, Light compression, Linear rebound, 1 Token

převodník

Sram X-Sync 2 Eagle 34T, steel, narrow-wide, 104 BCD

patka k přehazovačce

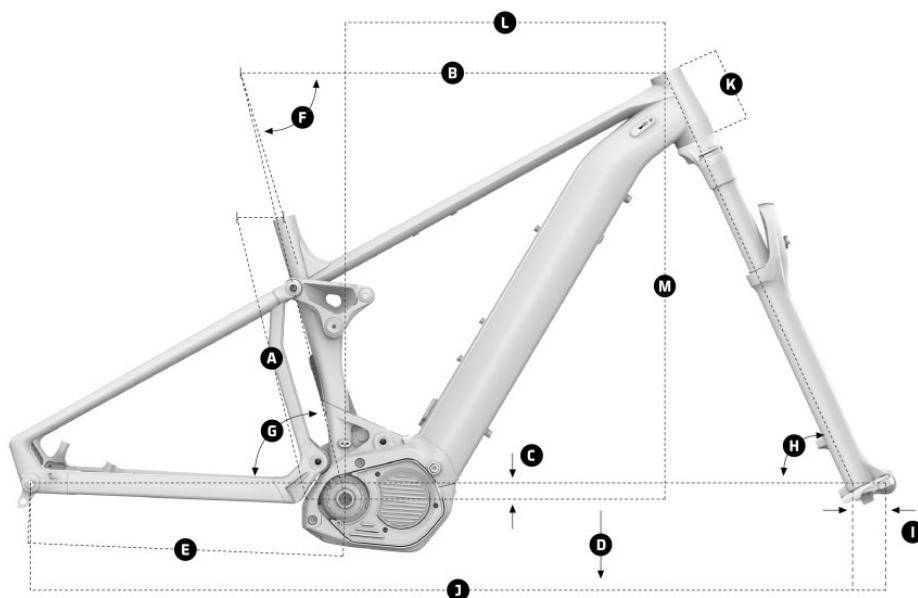
Mondraker M068

ostatní

*Optional external battery: Simplo 360Wh

motor+baterie

Shimano STEPS EP600, Simplo internal 720Wh, Shimano EN600

Geometrie

e-MTB ENDURO
DUSK

Size	S	M	L	XL
A Seat Tube Length	380 mm	420 mm	450 mm	490 mm
B Top Tube Length	605 mm	625 mm	650 mm	670 mm
C Bottom Bracket Drop	-25 mm	-25 mm	-25 mm	-25 mm
D Bottom Bracket Height	350 mm	350 mm	350 mm	350 mm
E Chainstay Legth	455 mm	455 mm	455 mm	455 mm
F Seat Tube Angle, Actual	73.5°	73.5°	73.5°	73.5°
G Seat Tube Angle, Effective	76°	76°	76°	76°
H Head Tube Angle	65.5°	65.5°	65.5°	65.5°
I Fork Offset	44 mm	44 mm	44 mm	44 mm
J Wheelbase	1225 mm	1245 mm	1265 mm	1285 mm
K Head Tube Length	110 mm	110 mm	130 mm	130 mm
L Reach	450 mm	470 mm	490 mm	510 mm
M Stack	622 mm	622 mm	640 mm	640 mm

Fotogalerie

