

CRAFTY RR, DESERT GREY/GRAPHITE/ORANGE, 2023

obj. č: 010.23340

Doporučená cena
194.999 Kč



Technické specifikace

vyráběné velikosti

S: 380mm / M: 420mm / L: 450mm / XL: 490mm

vidlice

Fox 38 29 Float GRIP2 Factory Kashima, 160mm, e-bike tuned, tapered steerer tube, Boost 15x110mm axle, offset 44mm. Settings: high and low-speed compression, high and low-speed rebound, air preload

přehazovačka

Sram GX Eagle, Type 3 roller bearing clutch, cage lock, 1x12s, X-Actuation 1:1

brzdové páčky

Sram Code R, tool-free reach adjust

řídítka

Onoff Sulfur 1.0 double butted 6061 alloy, rise: 20mm, width: 800mm, 9° backsweep, 5° upsweep, 31.8mm barbore

sedlovka

Fox Transfer Factory Kashima internal, diameter 31.6mm, S size: 363.5x125mm, M/L size: 418.3x150mm, XL size: 475.1x175mm

náboj přední

Mavic, Boost 15x110mm, IS 6 bolts

řetěz

Sram NX Eagle, 12s, Powerlock

dráty

Mavic J-bend double butted, contactless lacing

pláště

Maxxis Minion DHF 29x2.6, tubeless ready, 3C MAXX TERRA, EXO+ Protection, 120TPI, folding bead, Maxxis Minion DHR II 29x2.6, tubeless ready, 3C MAXX TERRA, EXO+ Protection, 120TPI, folding bead

obj.c.

010.23340

rám

Crafty 6061 Alloy Stealth Evo, e-Bike Optimized Zero Suspension System, 150mm travel, Forward Geometry, internal non-removable battery, Boost 12x148mm rear axle, tapered head tube, one-piece Monoblock upper link, HHG internal cable routing, MAX capacity sealed bearings, oversize 17mm axles, integrated dropout speed sensor, exclusive plastic motor covers.

hlavové složení

Onoff Saturn tapered for 1-1/8" to 1-1/2" head tube, ACB sealed bearings, top 41x30.2x7x45°x45°, bottom 51.9x40x8x45°x45°

řazení

Sram Trigger GX Eagle, 12s, X-Actuation 1:1, single click

kliky

Race Face Aeffect ebike, 165mm

představec

Onoff Sulfur FG 30mm 0°, 6061 forged alloy, 31.8mm barbore

sedlo

FIZIK Terra Aidon X5 145mm

náboj zadní

Mavic, Boost 12x148mm, ID360 Ratched system, IS 6 bolts

kazeta

Sram XG-1230, 11-50T, 12s

ráfky

Mavic E-Deemax 29, 30mm internal width, welded, PFP, tubeless ready, 28 spokes

a151

010.23340

gripy

Onoff Desert, 1lock-on, 135mm

tlumič

Fox Float-X LV Factory Kashima, 205x65mm. Settings: compression 2 positions lever, low-speed compression, low-speed rebound, air preload. Trunnion top mount, 25x10mm bottom bushings

zadní brzda

Sram Code R, oversized 4-piston caliper, Centerline 200mm IS 6 bolts one-piece rotor, steel-backed metal sintered pads

převodník

Sram X-Sync 2 Eagle 34T, steel, narrow-wide, 104 BCD

motor+baterie

Bosch Performance Line CX Cruise (25Km/h) Smart System , Bosch Powertube 750Wh, Bosch Kiox 300 / Bosch Mini Remote / Bosch System Controller

přední brzda

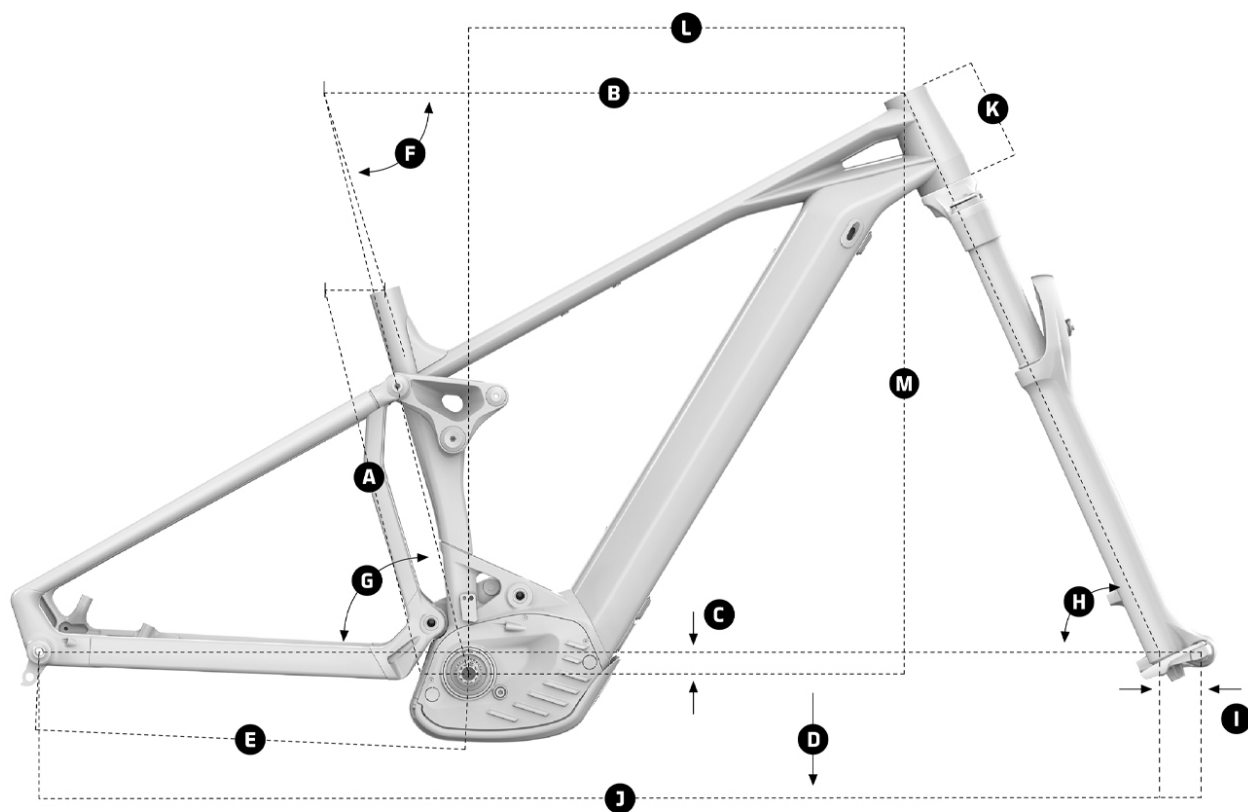
Sram Code R, oversized 4-piston caliper, Centerline 200mm IS 6 bolts one-piece rotor, steel-backed metal sintered pads

nastavení tlumiče

medium compression, medium rebound, air volume spacer 0.2

patka k přehazovačce

Mondraker M068

Geometrie

e-MTB ENDURO CRAFTY

Size	S	M	L	XL
A Seat Tube Length	380 mm	420 mm	450 mm	490 mm
B Top Tube Length	605 mm	625 mm	650 mm	670 mm
C Bottom Bracket Drop	-25 mm	-25 mm	-25 mm	-25 mm
D Bottom Bracket Height	350 mm	350 mm	350 mm	350 mm
E Chainstay Legth	455 mm	455 mm	455 mm	455 mm
F Seat Tube Angle, Actual	73.5°	73.5°	73.5°	73.5°
G Seat Tube Angle, Effective	76°	76°	76°	76°
H Head Tube Angle	65.5°	65.5°	65.5°	65.5°
I Fork Offset	44 mm	44 mm	44 mm	44 mm
J Wheelbase	1225 mm	1245 mm	1265 mm	1285 mm
K Head Tube Length	110 mm	110 mm	130 mm	130 mm
L Reach	450 mm	470 mm	490 mm	510 mm
M Stack	622 mm	622 mm	640 mm	640 mm

Fotogalerie

