

# CRAFTY CARBON R, CARBON/DESERT GREY/ORANGE, 2023

obj. č. 010.23348

Doporučená cena

**219.999 Kč**

Akční cena

**167.999 Kč**



## Technické specifikace

### vyřáběné velikosti

S: 380mm / M: 420mm / L: 450mm / XL: 490mm

### rám

Crafty Stealth Air full Carbon, e-Bike Optimized Zero Suspension System, 150mm travel, Forward Geometry, internal non-removable battery, Boost 12x148mm rear axle, tapered head tube, one-piece Monoblock upper link, HHG internal cable routing, MAX capacity sealed bearings, oversize 17mm axles, integrated dropout speed sensor, exclusive plastic motor covers.

### vidlice

Fox 38 29 Float GRIP Performance, 160mm, e-bike optimized, tapered steerer tube, Boost 15x110mm axle, 44mm offset, 68mm OD crown. Settings: 3 positions with micro adjust compression, low-speed rebound, air preload

### hlavové složení

Acros custom for 1-1/2

### přehazovačka

Sram GX Eagle, Type 3 roller bearing clutch, cage lock, 1x12s, X-Actuation 1:1

### řazení

Sram Trigger NX Eagle, 12s, X-Actuation 1:1, single click

### brzdové páčky

Sram DB8, SwingLink and lever pivot bearings, tools-free reach and contact point adjust

### kliky

Race Face Aeffect ebike, 165mm

### řídítka

Onoff Krypton 1.0 double butted 6061 alloy, rise: 20mm, width: 800mm, 9° backsweep, 5° upsweep, 31.8mm barbare

### představec

Onoff Krypton FG 30mm, CNC, 31.8mm barbare

### sedlovka

Onoff Pija dropper internal, diameter 31.6mm, S size: 405x95-125mm, M size 458x120-150mm, L size: 498x140-170mm, XL size: 498x140-170mm

### sedlo

FIZIK Terra Aidon X5 145mm

### náboj přední

Mavic, Boost 15x110mm, IS 6 bolts

### náboj zadní

Mavic, Boost 12x148mm, ID360 Ratched system, IS 6 bolts

### řetěz

Sram NX Eagle, 12s, Powerlock

### kazeta

Sram XG-1230, 11-50T, 12s

### dráty

Mavic J-bend double butted, contactless lacing

### ráfky

Mavic E-Deemax 29, 30mm internal width, welded, PFP, tubeless ready, 28 spokes

### pláště


Maxxis Minion DHF 29x2.6, tubeless ready, 3C MAXX TERRA, EXO+ Protection, 120TPI, folding bead, Maxxis Minion DHR II 29x2.6, tubeless ready, 3C MAXX TERRA, EXO+ Protection, 120TPI, folding bead

### a151

010.23348

|                                                                                                                                                                             |                                                                                                                           |
|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------|
| <b>obj.c.</b><br>010.23348                                                                                                                                                  | <b>gripy</b><br>Onoff Desert, 1lock-on, 135mm                                                                             |
| <b>tlumič</b><br>Fox Float-X LV Performance, 205x65mm. Settings: compression 2 positions lever, low-speed rebound, air preload. Trunnion top mount, 25x10mm bottom bushings | <b>přední brzda</b><br>Sram DB8, 4-piston caliper, Centerline 200mm IS 6 bolts one-piece rotor, steel-backed organic pads |
| <b>zadní brzda</b><br>Sram DB8, 4-piston caliper, Centerline 200mm IS 6 bolts one-piece rotor, steel-backed organic pads                                                    | <b>nastavení tlumiče</b><br>medium compression, medium rebound, air volume spacer 0.2                                     |
| <b>převodník</b><br>Sram X-Sync 2 Eagle 34T, alloy, narrow-wide, 104 BCD                                                                                                    | <b>patka k přehazovačce</b><br>Mondraker M068                                                                             |
| <b>motor+baterie</b><br>Bosch Performance Line CX Cruise (25Km/h) Smart System , Bosch Powertube 750Wh, Bosch Kiox 300 / Bosch Mini Remote / Bosch System Controller        |                                                                                                                           |

Geometrie

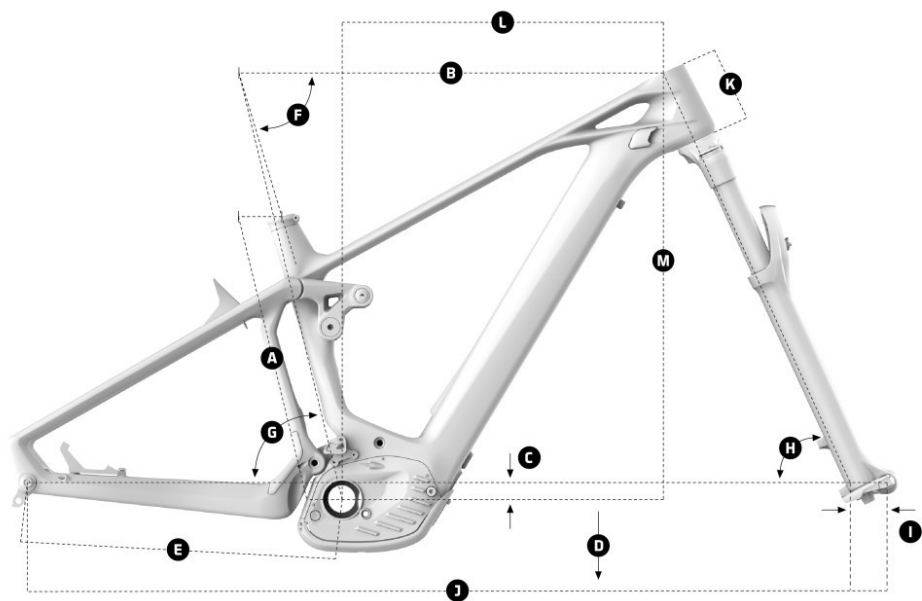

e-MTB ENDURO  
**CRAFTY CARBON**

| Size                         | S       | M       | L       | XL      |
|------------------------------|---------|---------|---------|---------|
| A Seat Tube Length           | 380 mm  | 420 mm  | 450 mm  | 480 mm  |
| B Top Tube Length            | 605 mm  | 625 mm  | 650 mm  | 670 mm  |
| C Bottom Bracket Drop        | -25 mm  | -25 mm  | -25 mm  | -25 mm  |
| D Bottom Bracket Height      | 350 mm  | 350 mm  | 350 mm  | 350 mm  |
| E Chainstay Legth            | 455 mm  | 455 mm  | 455 mm  | 455 mm  |
| F Seat Tube Angle, Actual    | 73.5°   | 73.5°   | 73.5°   | 73. 5°  |
| G Seat Tube Angle, Effective | 76°     | 76°     | 76°     | 76°     |
| H Head Tube Angle            | 65.5°   | 65.5°   | 65.5°   | 65.5°   |
| I Fork Offset                | 44 mm   | 44 mm   | 44 mm   | 44 mm   |
| J Wheelbase                  | 1225 mm | 1245 mm | 1265 mm | 1285 mm |
| K Head Tube Length           | 110 mm  | 110 mm  | 130 mm  | 130 mm  |
| L Reach                      | 450 mm  | 470 mm  | 490 mm  | 510 mm  |
| M Stack                      | 622 mm  | 622 mm  | 640 mm  | 640 mm  |

Fotogalerie

