

# CHASER, GRAPHITE/BLACK, 2022

obj. č: 010.22162



Chaser je základním modelem enduro ebiků Mondraker. Jeho hliníkový rám STEALTH se systémem odpružení ZERO SUSPENSION SYSTEM optimalizovaným pro ebiky vám spolu s kvalitními komponenty, kterými jsme ho vybavili, umožní užívat si nekonečné traily za nejlepší poměr ceny a výkonu na trhu. Nic jiného vám nenabídne víc než Chaser. Mondraker má nejvyvinutější ebiky v tomto odvětví a je vidět, že Chaser je součástí této rodiny. Navíc má 160 mm zdvihu odpružení vpředu a 150 mm vzadu, což znamená, že si užijete spoustu a spoustu zábavy. Chaser je k dispozici ve dvou barevných provedeních.

## Technické specifikace

|                                                                                                                                                                                                                                                                                                                                                                                                                           |                                                                                                                                                                                                                                  |
|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>vyráběné velikosti</b><br>S: 380mm / M: 420mm / L: 450mm / XL: 490mm                                                                                                                                                                                                                                                                                                                                                   | <b>hmotnost</b><br>24,8 Kg                                                                                                                                                                                                       |
| <b>rám</b><br>Chaser 6061 Alloy Stealth Evo, e-Bike Optimized Zero Suspension System, 150mm travel, Forward Geometry, internal removable battery with integrated alloy cover, Boost 12x148mm rear axle, tapered head tube, one-piece Monoblock upper link, HHG internal cable routing, MAX capacity sealed bearings, oversize 17mm axles, integrated dropout speed sensor, exclusive plastic motor covers, shock mudguard | <b>vidlice</b><br>RockShox 35 Silver TK 29, 160mm, TurnKey, Solo Air, tapered steerer tube, Boost 15x110mm axle, 35mm steel stanchions, 44mm offset. Settings: compression adjustment at low-speed to lock, rebound, air preload |
| <b>hlavové složení</b><br>Onoff Saturn tapered for 1-1/8" to 1-1/2" head tube, ACB sealed bearings, top 41x30.2x7x45°x45°, bottom 51.9x40x8x45°x45°                                                                                                                                                                                                                                                                       | <b>přehazovačka</b><br>Sram SX Eagle, Type 3 roller bearing clutch, cage lock, long cage, 1x12s, X-actuation 1:1                                                                                                                 |
| <b>řazení</b><br>Sram Trigger SX Eagle, 12s, X-Actuation 1:1, single click                                                                                                                                                                                                                                                                                                                                                | <b>brzdové páčky</b><br>Sram G2 R, tool-free reach adjust                                                                                                                                                                        |
| <b>kliky</b><br>Race Face Aeffect ebike, 165mm                                                                                                                                                                                                                                                                                                                                                                            | <b>řídítka</b><br>Onoff Sulfur 1.0 double butted 6061 alloy, rise: 20mm, width: 800mm, 9° backsweep, 5° upsweep, 31.8mm barbore                                                                                                  |
| <b>představec</b><br>Onoff Sulfur FG 30mm 0°, 6061 forged alloy, 31.8mm barbore                                                                                                                                                                                                                                                                                                                                           | <b>sedlovka</b><br>Onoff Pija dropper internal, diameter 31.6mm, S size: 387x125mm, M size: 425x150mm, L/XL size: 465x170mm                                                                                                      |
| <b>sedlo</b><br>FIZIK Terra Aidon X5 145mm                                                                                                                                                                                                                                                                                                                                                                                | <b>náboj přední</b><br>Formula DC711, Boost 15x110mm, sealed bearings, IS 6 bolts                                                                                                                                                |
| <b>náboj zadní</b><br>Formula EHL148 Boost 12x148mm, sealed bearings, IS 6 bolts                                                                                                                                                                                                                                                                                                                                          | <b>řetěz</b><br>Sram SX Eagle, 12s, Powerlock                                                                                                                                                                                    |
| <b>kazeta</b><br>Sram PG-1210, 11-50T, 12s                                                                                                                                                                                                                                                                                                                                                                                | <b>dráty</b><br>CN round stainless steel                                                                                                                                                                                         |

**ráfky**  
MDK-HP1 29, 30mm internal width, tubeless ready, 32 spokes

**a151**  
010.22162

**gripy**  
Onoff Diamond, 1lock-on, 135mm

**přední brzda**  
Sram G2 R, 4-piston caliper, Centerline 200mm IS 6 bolts one-piece rotor, steel-backed organic pads

**nastavení tlumiče**  
Light compression, Light rebound, 1 Token

**patka k přehazovačce**  
Mondraker M068

**pláště**  
Maxxis Rekon 29x2.6, tubeless ready, dual compound, EXO protection, 60TPI, folding bead, Maxxis Rekon 29x2.6, tubeless ready, dual compound, EXO protection, 60TPI, folding bead

**obj.c.**  
010.22162


**tlumič**  
RockShox Deluxe Select R Debonair, 205x65mm. Settings: Low-speed rebound, air preload. Trunnion top mount, 25x10mm bottom bushings

**zadní brzda**  
Sram G2 R, 4-piston caliper, Centerline 200mm IS 6 bolts one-piece rotor, steel-backed organic pads

**převodník**  
Sram X-Sync 2 Eagle 34T, steel, narrow-wide, 104 BCD

**motor+baterie**  
Bosch Performance Line CX Cruise (25Km/h) GEN4, Bosch Powertube 625Wh, Bosch Purion

Geometrie

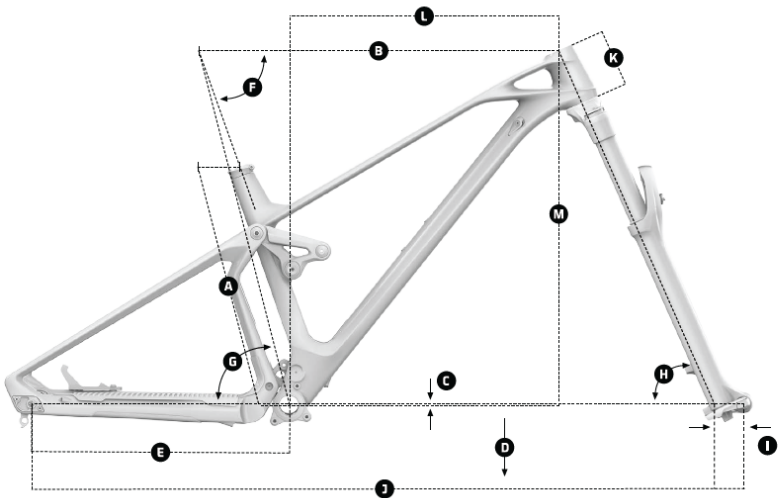

|   |                            |
|---|----------------------------|
| A | Seat Tube Length           |
| B | Top Tube Length            |
| C | Bottom Bracket Drop        |
| D | Bottom Bracket Height      |
| E | Chainstay Length           |
| F | Seat Tube Angle, Actual    |
| G | Seat Tube Angle, Effective |
| H | Head Tube Angle            |
| I | Fork Offset                |
| J | Wheelbase                  |
| K | Head Tube Length           |
| L | Reach                      |
| M | Stack                      |

## e-MTB ENDURO CHASER

| Size                                | S       | M       | L       | XL      |
|-------------------------------------|---------|---------|---------|---------|
| <b>A</b> Seat Tube Length           | 380 mm  | 420 mm  | 450 mm  | 490 mm  |
| <b>B</b> Top Tube Length            | 605 mm  | 625 mm  | 650 mm  | 670 mm  |
| <b>C</b> Bottom Bracket Drop        | -25 mm  | -25 mm  | -25 mm  | -25 mm  |
| <b>D</b> Bottom Bracket Height      | 336 mm  | 336 mm  | 336 mm  | 336 mm  |
| <b>E</b> Chainstay Legth            | 455 mm  | 455 mm  | 455 mm  | 455 mm  |
| <b>F</b> Seat Tube Angle, Actual    | 73.5°   | 73.5°   | 73.5°   | 73.5°   |
| <b>G</b> Seat Tube Angle, Effective | 76°     | 76°     | 76°     | 76°     |
| <b>H</b> Head Tube Angle            | 65.5°   | 65.5°   | 65.5°   | 65.5°   |
| <b>I</b> Fork Offset                | 44 mm   | 44 mm   | 44 mm   | 44 mm   |
| <b>J</b> Wheelbase                  | 1225 mm | 1245 mm | 1265 mm | 1285 mm |
| <b>K</b> Head Tube Length           | 110 mm  | 110 mm  | 130 mm  | 130 mm  |
| <b>L</b> Reach                      | 450 mm  | 470 mm  | 490 mm  | 510 mm  |
| <b>M</b> Stack                      | 622 mm  | 622 mm  | 640 mm  | 640 mm  |

### Fotogalerie

