

CHASER, GRAPHITE/BLACK, 2022

obj. č.: 010.22162



Doporučená cena

142.999 Kč

Akční cena

104.999 Kč

Chaser je základním modelem enduro ebiků Mondraker. Jeho hliníkový rám STEALTH se systémem odpružení ZERO SUSPENSION SYSTEM optimalizovaným pro ebiky vám spolu s kvalitními komponenty, kterými jsme ho vybavili, umožní užívat si nekonečné traily za nejlepší poměr ceny a výkonu na trhu. Nic jiného vám nenabídne víc než Chaser. Mondraker má nejvyvinutější ebiky v tomto odvětví a je vidět, že Chaser je součástí této rodiny. Navíc má 160 mm zdvihu odpružení vpředu a 150 mm vzadu, což znamená, že si užijete spoustu a spoustu zábavy. Chaser je k dispozici ve dvou barevných provedeních.

Technické specifikace

vyráběné velikosti S: 380mm / M: 420mm / L: 450mm / XL: 490mm	hmotnost 24,8 Kg
rám Chaser 6061 Alloy Stealth Evo, e-Bike Optimized Zero Suspension System, 150mm travel, Forward Geometry, internal removable battery with integrated alloy cover, Boost 12x148mm rear axle, tapered head tube, one-piece Monoblock upper link, HHG internal cable routing, MAX capacity sealed bearings, oversize 17mm axles, integrated dropout speed sensor, exclusive plastic motor covers, shock mudguard	vidlice RockShox 35 Silver TK 29, 160mm, TurnKey, Solo Air, tapered steerer tube, Boost 15x110mm axle, 35mm steel stanchions, 44mm offset. Settings: compression adjustment at low-speed to lock, rebound, air preload
hlavové složení Onoff Saturn tapered for 1-1/8" to 1-1/2" head tube, ACB sealed bearings, top 41x30.2x7x45°x45°, bottom 51.9x40x8x45°x45°	přehazovačka Sram SX Eagle, Type 3 roller bearing clutch, cage lock, long cage, 1x12s, X-actuation 1:1
řazení Sram Trigger SX Eagle, 12s, X-Actuation 1:1, single click	brzdové páčky Sram G2 R, tool-free reach adjust
kliky Race Face Aeffect ebike, 165mm	řídítka Onoff Sulfur 1.0 double butted 6061 alloy, rise: 20mm, width: 800mm, 9° backsweep, 5° upsweep, 31.8mm barbore
představec Onoff Sulfur FG 30mm 0°, 6061 forged alloy, 31.8mm barbore	sedlovka Onoff Pija dropper internal, diameter 31.6mm, S size: 387x125mm, M size: 425x150mm, L/XL size: 465x170mm
sedlo FIZIK Terra Aidon X5 145mm	náboj přední Formula DC711, Boost 15x110mm, sealed bearings, IS 6 bolts
náboj zadní Formula EHL148 Boost 12x148mm, sealed bearings, IS 6 bolts	řetěz Sram SX Eagle, 12s, Powerlock
kazeta Sram PG-1210, 11-50T, 12s	dráty CN round stainless steel

ráfky
MDK-HP1 29, 30mm internal width, tubeless ready, 32 spokes

a151
010.22162

gripy
Onoff Diamond, 1lock-on, 135mm

přední brzda
Sram G2 R, 4-piston caliper, Centerline 200mm IS 6 bolts one-piece rotor, steel-backed organic pads

nastavení tlumiče
Light compression, Light rebound, 1 Token

patka k přehazovačce
Mondraker M068

pláště
Maxxis Rekon 29x2.6, tubeless ready, dual compound, EXO protection, 60TPI, folding bead, Maxxis Rekon 29x2.6, tubeless ready, dual compound, EXO protection, 60TPI, folding bead

obj.c.
010.22162


tlumič
RockShox Deluxe Select R Debonair, 205x65mm. Settings: Low-speed rebound, air preload. Trunnion top mount, 25x10mm bottom bushings

zadní brzda
Sram G2 R, 4-piston caliper, Centerline 200mm IS 6 bolts one-piece rotor, steel-backed organic pads

převodník
Sram X-Sync 2 Eagle 34T, steel, narrow-wide, 104 BCD

motor+baterie
Bosch Performance Line CX Cruise (25Km/h) GEN4, Bosch Powertube 625Wh, Bosch Purion

Geometrie

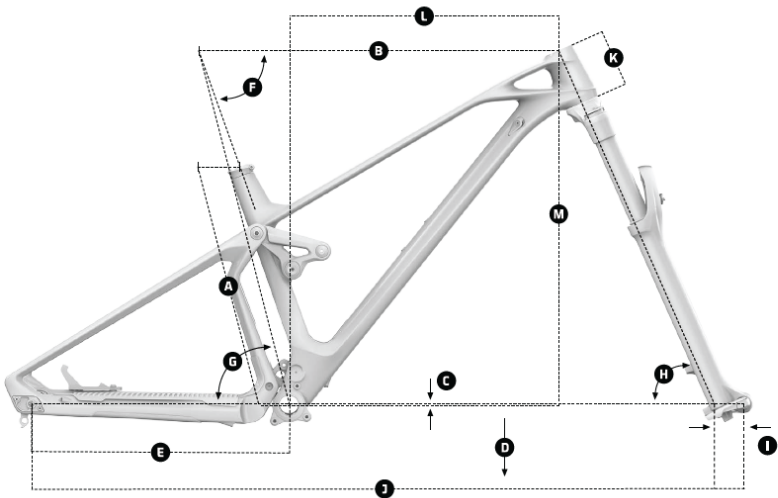

- A Seat Tube Length
- B Top Tube Length
- C Bottom Bracket Drop
- D Bottom Bracket Height
- E Chainstay Length
- F Seat Tube Angle, Actual
- G Seat Tube Angle, Effective
- H Head Tube Angle
- I Fork Offset
- J Wheelbase
- K Head Tube Length
- L Reach
- M Stack

e-MTB ENDURO CHASER

Size	S	M	L	XL
A Seat Tube Length	380 mm	420 mm	450 mm	490 mm
B Top Tube Length	605 mm	625 mm	650 mm	670 mm
C Bottom Bracket Drop	-25 mm	-25 mm	-25 mm	-25 mm
D Bottom Bracket Height	336 mm	336 mm	336 mm	336 mm
E Chainstay Legth	455 mm	455 mm	455 mm	455 mm
F Seat Tube Angle, Actual	73.5°	73.5°	73.5°	73.5°
G Seat Tube Angle, Effective	76°	76°	76°	76°
H Head Tube Angle	65.5°	65.5°	65.5°	65.5°
I Fork Offset	44 mm	44 mm	44 mm	44 mm
J Wheelbase	1225 mm	1245 mm	1265 mm	1285 mm
K Head Tube Length	110 mm	110 mm	130 mm	130 mm
L Reach	450 mm	470 mm	490 mm	510 mm
M Stack	622 mm	622 mm	640 mm	640 mm

Fotogalerie

