

FOXY CARBON RR 29 MIND, MARLIN BLUE/CARBON, 2022

obj. č.: 010.22320



Technické specifikace

vyráběné velikosti S: 380mm / M: 420mm / L: 450mm / XL: 500mm	hmotnost 13,4 Kg
rám Foxy 29 Stealth Air full Carbon, Zero Suspension System, 150mm travel, Forward Geometry, aluminium CSC upper link with carbon bridge, Boost 12x148mm rear axle, tapered head tube, 73mm BSA bottom bracket, dedicated 1x drivetrain design, HHG internal cable routing, Enduro MAX sealed bearings, shock mudguard, ISCG 05, custom frame protectors. *Optional Geometry Kit	vidlice Öhlins RXF 36 M.2 29, 160mm, TTX18 Twin Tube cartridge, tapered steerer tube, Boost 15x110mm axle, offset 44mm. Settings: high speed compression lever with climb mode, low-speed compression, rebound, air preload, ramp chamber
hlavové složení Acros custom for 1-1/2	přehazovačka Sram GX Eagle, Type 3 roller bearing clutch, cage lock, 1x12s, X-Actuation 1:1
řazení Sram Trigger GX Eagle, 12s, X-Actuation 1:1	brzdové páčky Sram G2 RS, SwingLink, tool-free reach adjust
kliky Sram GX Eagle, Boost, DUB axle, Direct mount chain ring, S/M size: 170mm, L/XL size: 175mm	středové složení Sram DUB BSA, sealed bearings, 73mm
řídítka Onoff Sulfur 1.0 double butted 6061 alloy, rise: 20mm, width: 800mm, 9° backsweep, 5° upsweep, 31.8mm barbare	představec Onoff Sulfur FG 30mm, 6061 forged alloy, 31.8mm barbare
sedlovka Onoff Pija dropper internal, diameter 31.6mm, S size: 387x125mm, M size: 425x150mm, L/XL size: 465x170mm	sedlo SDG BEL-AIR 3.0, LPU foam, steel rails
náboj přední DT 350, Boost 15x110mm, IS 6 bolts	náboj zadní DT 350, Boost 12x148mm, 36T SL Ratchet system, IS 6 bolts, XD freehub
řetěz Sram NX Eagle, 12s, Powerlock	kazeta Sram XG-1275, 10-52T, 12s
dráty DT Competition, straightpull	pláště Maxxis Minion DHF 29x2.5 WT, tubeless ready, 3C MAXX TERRA compound, EXO+ protection, 120TPI, folding bead, Maxxis Minion DHR II 29x2.4 WT, tubeless ready, 3C MAXX TERRA compound, EXO+ protection, 120TPI, folding bead
a151 010.22320	obj.c. 010.22320

gripy
Onoff Diamond, 1lock-on, 135mm

přední brzda
Sram G2 RS, 4-piston caliper, Centerline 200mm IS 6 bolts one-piece rotor, steel-backed organic pads

nastavení tlumiče
C20 compression, R35 rebound

patka k přehazovačce
Sram UDH


tlumič
Öhlins TTX Air 205x65mm. Settings: high speed compression lever with climb mode, low-speed compression, rebound, air preload. Trunnion top mount, 30x8mm bottom bushings

zadní brzda
Sram G2 RS, 4-piston caliper, Centerline 180mm IS 6 bolts one-piece rotor, steel-backed organic pads

převodník
32T, CNC-machined alloy, X-SYNC 2

ostatní
*Optional Geometry kit: steering cups: +/- 1°

Geometrie

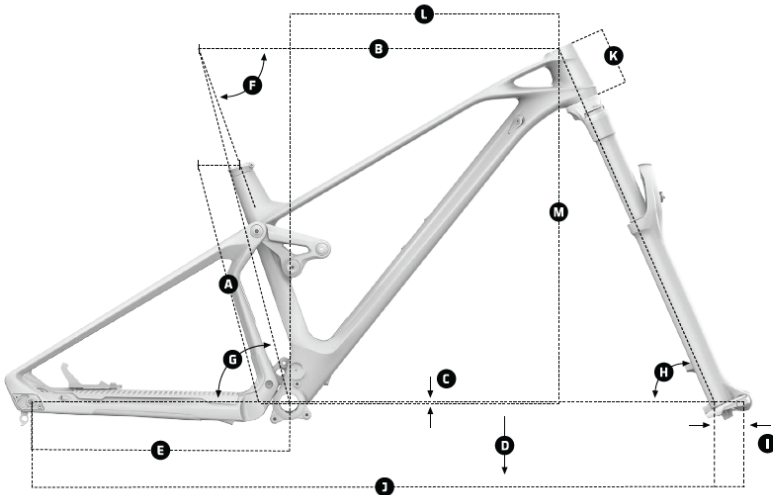

A	Seat Tube Length
B	Top Tube Length
C	Bottom Bracket Drop
D	Bottom Bracket Height
E	Chainstay Length
F	Seat Tube Angle, Actual
G	Seat Tube Angle, Effective
H	Head Tube Angle
I	Fork Offset
J	Wheelbase
K	Head Tube Length
L	Reach
M	Stack

ENDURO
FOXY CARBON (STANDARD)

Size	S	M	L	XL
A Seat Tube Length	375 mm	415 mm	445 mm	500 mm
B Top Tube Length	600 mm	620 mm	650 mm	670 mm
C Bottom Bracket Drop	-23	-23	-23	-23
D Bottom Bracket Height	350 mm	350 mm	350 mm	350 mm
E Chainstay Length	435 mm	435 mm	435 mm	435 mm
F Seat Tube Angle, Actual	70.5°	70.5°	70.5°	70.5°
G Seat Tube Angle, Effective	76°	76°	76°	76°
H Head Tube Angle	65°	65°	65°	65°
I Fork Offset	44 mm	44 mm	44 mm	44 mm
J Wheelbase	1203 mm	1227 mm	1253 mm	1279 mm
K Head Tube Length	90 mm	100 mm	115 mm	130 mm
L Reach	445 mm	465 mm	485 mm	505 mm
M Stack	615 mm	623 mm	637 mm	651 mm

ENDURO
FOXY CARBON (LOW)

Size	S	M	L	XL
A Seat Tube Length	375 mm	415 mm	445 mm	500 mm
B Top Tube Length	600 mm	620 mm	650 mm	670 mm
C Bottom Bracket Drop	-28	-28	-28	-28
D Bottom Bracket Height	345 mm	345 mm	345 mm	345 mm
E Chainstay Length	445 mm	445 mm	445 mm	445 mm
F Seat Tube Angle, Actual	70°	70°	70°	70°
G Seat Tube Angle, Effective	75.5°	75.5°	75.5°	75.5°
H Head Tube Angle	64.5°	64.5°	64.5°	64.5°
I Fork Offset	44 mm	44 mm	44 mm	44 mm
J Wheelbase	1210 mm	1233 mm	1260 mm	1286 mm
K Head Tube Length	90 mm	100 mm	115 mm	130 mm
L Reach	440 mm	460 mm	480 mm	500 mm
M Stack	617 mm	627 mm	641 mm	656 mm

Fotogalerie

