

PLAY 26, BRITISH RACING GREEN/RACING SILVER/YELLOW, 2023

obj. č.: 010.23209


Doporučená cena
69.999 Kč



Technické specifikace

vyráběné velikosti One size: 350mm	rám Play 26 6061 Alloy Stealth evo, hydroformed tubing, integrated internal non-removable battery, Tapered head tube, HHG internal cable routing, BSA bottom bracket, QR 9mm rear axle, 1x drivetrain compatible
vidlice RockShox Judy Silver TK 26, 100mm, TurnKey, Solo Air, tapered steerer tube, 9x100mm axle, 30mm steel stanchions, 40mm offset. Settings: compression adjustment at low-speed to lock, rebound, air preload	hlavové složení Onoff Saturn tapered for 1-1/8" to 1-1/2" head tube, ACB sealed bearings, top 41x30.2x7x45°x45°, bottom 51.9x40x8x45°x45°
přehazovačka Sram NX, 11s, long cage, X-actuation 1:1	řazení Sram trigger NX 11s, X-actuation 1:1
brzdové páčky Sram Level, tooled reach adjust, lever pivot bushings	kliky Samox DM 30T steel, 152mm
středové složení BSA, 73mm	řídítka MDK XC 1.0, 6061 alloy, rise: 25mm, width: 650mm, 9° backsweep, 5° upsweep, 31.8mm barbore
představec Onoff Sulfur FG 30mm 0°, 6061 forged alloy, 31.8mm barbore	sedlovka MDK XC 0-R, 6061 T6 Alloy, diameter 31.6mm, length 350mm
sedlo SDG Fly JR	náboj přední Formula DC20LW, 9x100mm, cup cone ball bearings, IS 6 bolts
náboj zadní Mahle-Ebikemotion X-35	řetěz Sram PC1110 11s, Powerlock
kazeta Sram PG 1030 11-42T, 11s	dráty CN round stainless steel
ráfky MDK-XP1 26 TLR, 25mm internal width, tubeless ready, 32 spokes	pláště Kenda Booster 26x2.4 single compound 30TPI, wire bead
a151 010.23209	obj.c. 010.23209
gripy Onoff Twin, 1lock-on	přední brzda Sram Level, 2 piece caliper, Centerline 160mm IS 6 bolts one-piece rotor, steel-backed organic pad
zadní brzda Sram Level, 2 piece caliper, Centerline 160mm IS 6 bolts one-piece rotor, steel-backed organic pad	převodník 30T, steel

Geometrie

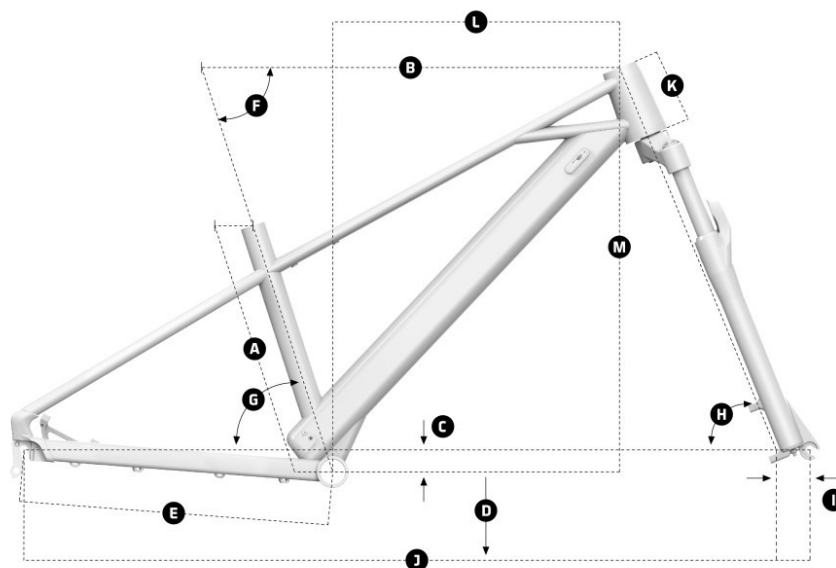

e-KIDS / YOUTH **PLAY 26 / 24 / 20**

Size	26	24	20
A Seat Tube Length	350 mm	320 mm	260 mm
B Top Tube Length	567 mm	517 mm	475 mm
C Bottom Bracket Drop	-30 mm	-30 mm	-15 mm
D Bottom Bracket Height	300 mm	280 mm	240 mm
E Chainstay Length	420 mm	405 mm	355 mm
F Seat Tube Angle, Actual	72°	72°	72°
G Seat Tube Angle, Effective	72°	72°	72°
H Head Tube Angle	68°	68°	68°
I Fork Offset	40 mm	40 mm	40 mm
J Wheelbase	1060 mm	994 mm	903 mm
K Head Tube Length	100 mm	100 mm	100 mm
L Reach	390 mm	350 mm	340 mm
M Stack	546 mm	537 mm	387 mm

Fotogalerie

