

SUMMUM CARBON R 29 MIND (SPE), CARBON/FROST GREEN/YELLOW, 2022

obj. č.: 010.22096SPE



Doporučená cena

200.199 Kč

Akční cena

120.199 Kč

Summum carbon R má úplně stejný rám jako RR a je k dispozici také s volitelnými koly MX (29" přední kolo a 27,5" zadní kolo), na DH tratích ho uvidíte nejčastěji. Efektivní, rychlý a nezničitelný, budete to vy, kdo bude určovat limity, protože Summum Carbon R si vždy říká o víc.

Technické specifikace

vyráběné velikosti

S / M / L / XL 29

hmotnost

16,8 Kg

rám

Summum Carbon Stealth Air full Carbon, Zero Suspension System, 200mm travel, Forward Geometry, Carbon Monoblock upper link, SuperBoost 12x157mm rear axle, 83mm BSA bottom bracket, HHG internal cable routing, MAX. capacity dual raw Enduro bearings, shock mudguard, ISCG 05, custom frame protectors. *Optional Geometry kit

vidlice

Fox 40 29 Float FIT GRIP EVOL Performance, 203mm, air spring, 1-1/8" steerer tube, 20x110mm axle, offset 56mm. Settings: low-speed compression, low-speed rebound, air preload

hlavové složení

Onoff Mercurium 1.5 ZS for 1-1/8" steerer tube, 41x30.15x7x45°x45° ACB sealed bearings, geometry kit cups, external diameter 56mm

přehazovačka

Sram GX DH, 7s, medium cage, X-actuation 1:1

řazení

Sram trigger GX DH 7s, X-actuation 1:1

brzdové páčky

Sram G2 RS, SwingLink, tool-free reach adjust

kliky

Truvativ Descendant DH, DUB axle, Direct mount chain ring, 165mm

středové složení

Sram DUB BSA, sealed bearings, 83mm

řídítka

Onoff Sulfur 1.0 double butted 6061 alloy, rise: 20mm, width: 800mm, 9° backsweep, 5° upsweep, 31.8mm barbore

představec

Onoff Krypton DH CNC Integrated FG, 25-30mm adjustable length, 31.8mm barbore, 6061 alloy, 2x6mm spacer

sedlovka

SDG Micro I-Beam SP-751 Alloy, diameter 31.6mm, length 300mm, micro-adjustment

sedlo

SDG I-Fly 2.0 I-Beam, high-density PU foam, Cordura sides

náboj přední


e*thirteen Boost 20x110mm, triple-sealed, fully machined aluminum, IS 6 bolts

řetěz

Sram PC1110 11s, Powerlock

kazeta Sram PG 720 11-25T, 7s	dráty e*thirteen custom Hive triple-buttet black alloy, alloy nipples, nipple washers
ráfky e*thirteen LG1 Plus DH, IW29 29	pláště Michelin DH34 29x2.4, tubeless ready, Magi-X DH compound, double-reinforced DH shield casing, wire bead
a151 010.22096SPE	obj.c. 010.22096SPE
gripy Onoff Diamond, 1lock-on, 135mm	tlumič Fox DHX2 Performance Elite, 225x70mm. Settings: low-speed compression, low-speed rebound, spring preload. Trunnion top mount, 30x8mm bottom bushings
přední brzda Sram G2 RS, 4-piston caliper, Centerline 203mm IS 6 bolts one-piece rotor, steel-backed organic pads	zadní brzda Sram G2 RS, 4-piston caliper, Centerline 203mm IS 6 bolts one-piece rotor, steel-backed organic pads
nastavení tlumiče ECC010 compression, ECR012 rebound. Spring rate: S size 400 lbs, M size 450 lbs, L/XL size 500 lbs	převodník 34T, steel, X-SYNC,E.13 Vario Compact Upper Slider ,Alloy backplate ,DMB (Direct mount Bashguard) Lower Slider 34-36t, ISCG 05 adjustable upper slider
ostatní *Optional geometry kit: +-1° / +-2° headset cups	

Geometrie

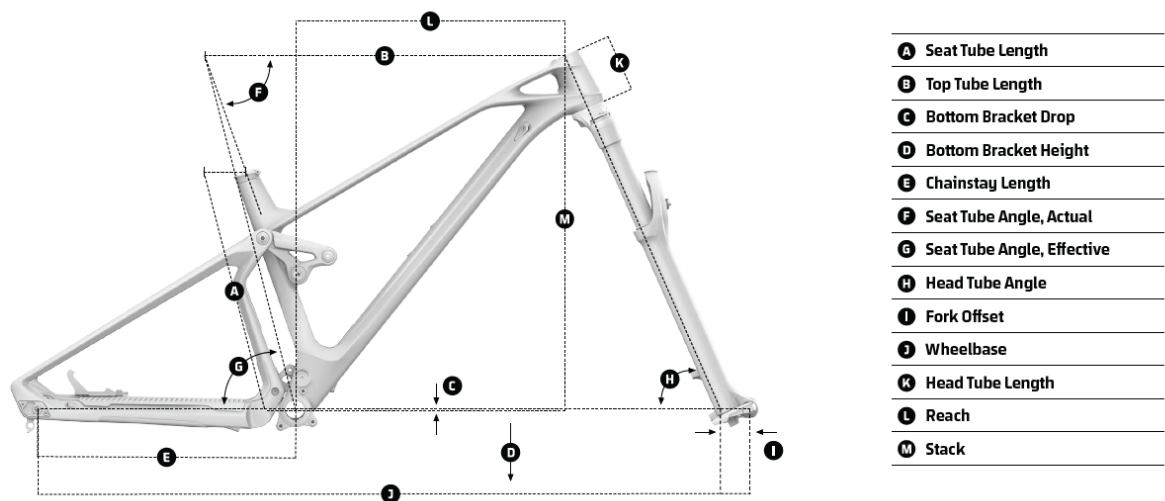

DOWNHILL SUMMUM CARBON

Size	S	M	L	XL
A Seat Tube Length	400 mm	400 mm	400 mm	400 mm
B Top Tube Length	575 mm	595 mm	620 mm	645 mm
C Bottom Bracket Drop	-20 mm	-20 mm	-20 mm	-20 mm
D Bottom Bracket Height	350 mm	350 mm	350 mm	350 mm
E Chainstay Legth	450/455/460 mm	450/455/460 mm	450/455/460 mm	450/455/460 mm
F Seat Tube Angle, Actual	69°	68,5°	69°	69°
G Seat Tube Angle, Effective	77°	77°	77°	77°
H Head Tube Angle	63°	63,5°	63,5°	63,5°
I Fork Offset	56 mm	56 mm	56 mm	56 mm
J Wheelbase	1260 mm	1270 mm	1295 mm	1320 mm
K Head Tube Length	110 mm	110 mm	112 mm	112 mm
L Reach	430 mm	450 mm	475 mm	500 mm
M Stack	632 mm	633 mm	632 mm	632 mm