

SUMMUM CARBON RR 29 MIND, CARBON/RACING SILVER, 2022

obj. č.: 010.22104



Doporučená cena

267.799 Kč

Akční cena

160.699 Kč

Pokud se chcete cítit jako jeden z našich mezinárodních jezdců, je toto kolo pro vás. S rámem, který je od základu nový, je měřítkem na mezinárodních tratích. Je postaveno s využitím převratných technologií společnosti Mondraker, včetně MIND, systému telemetrie, který vám pomůže vydat ze sebe maximum díky optimalizaci odpružení, systému ZERO SUSPENSION. Kolo se dodává ve dvou variantách, s 29" koly vpředu i vzadu, nebo MX s 29" koly vpředu a 27,5" koly vzadu.

Technické specifikace

vyráběné velikosti

S / M / L / XL 29

hmotnost

15,9 Kg

rám

Summum Carbon Stealth Air full Carbon, Zero Suspension System, 200mm travel, Forward Geometry, Carbon Monoblock upper link, SuperBoost 12x157mm rear axle, 83mm BSA bottom bracket, HHG internal cable routing, MAX. capacity dual raw Enduro bearings, shock mudguard, ISCG 05, custom frame protectors.

*Geometry kit included

vidlice

Fox 40 29 Float FIT GRIP2 EVOL Factory Kashima, 203mm, air spring, 1-1/8" steerer tube, 20x110mm axle, offset 56mm.

Settings: high and low-speed compression, high and low-speed rebound, air preload

hlavové složení

Onoff Mercurium 1.5 ZS for 1-1/8" steerer tube, 41x30.15x7x45°x45° ACB sealed bearings, geometry kit cups, external diameter 56mm

přehazovačka

Shimano Saint RD-M820-SS, 10s, Shadow+, short cage

řazení

Shimano Saint SL-M820 10s, low friction multi bearing, instant release, multi release, 2-way release

brzdové páčky

Shimano Saint, ergonomic antiskid lever with servo wave, free stroke and tool less reach adjust

kličky

Shimano Saint M825 Hollowtech II, reinforced steel axle, 165mm

středové složení

Shimano 83mm

řídítka

Renthal Fatbar series 7 alloy, rise: 30mm, width: 800mm, 7° backsweep, 5° upsweep, 31.8mm bar bore

představec

Onoff Krypton DH CNC Integrated FG, 25-30mm adjustable length, 31.8mm bar bore, 6061 alloy, 2x6mm spacer

sedlovka


SDG Micro I-Beam SP-951 Carbon, diameter 31.6mm, length 300mm, micro-adjustment

sedlo

SDG I-Fly 2.0 I-Beam, high-density PU foam, Cordura sides

náboj přední e*thirteen Boost 20x110mm, triple-sealed, fully machined aluminum, IS 6 bolts	řetěz Shimano HG95, 10s
kazeta Shimano CS-HG500-10, 11-25T, 10s	dráty e*thirteen custom Hive triple-buttet black alloy, alloy nipples, nipple washers
ráfky e*thirteen LG1 Race Carbon, IW30 29	pláště Michelin DH34 29x2.4, tubeless ready, Magi-X DH compound, double-reinforced DH shield casing, wire bead, Michelin DH34 29x2.4, tubeless ready, Magi-X DH compound, double-reinforced DH shield casing, wire bead
a151 010.22104	obj.c. 010.22104
gripy Renthal, double lock-on, kevlar compound, 130mm	tlumič Fox DHX2 Factory Kashima, 225x70mm. Settings: high and low-speed compression, high and low-speed rebound, spring preload. Super light steel (SLS) spring. Trunion top mount, 30x8mm bottom bushings
přední brzda Shimano Saint M820, 4-piston caliper, RT86 203mm 2-piece IS 6 bolts rotor with ICE technology, resin pads with cooler	zadní brzda Shimano Saint M820, 4-piston caliper, RT86 203mm 2-piece IS 6 bolts rotor with ICE technology, resin pads with cooler
nastavení tlumiče ECC010 compression, ECR012 rebound. Spring rate: S size 400 lbs, M size 450 lbs, L/XL size 500 lbs	převodník 36T, aluminum, BCD 104, E.13 Vario Compact Upper Slider ,Alloy backplate ,DMB (Direct mount Bashguard) Lower Slider 34-36t, ISCG 05 adjustable upper slider
ostatní *Geometry kit included: +-1° / +-2° headset cups	

Geometrie

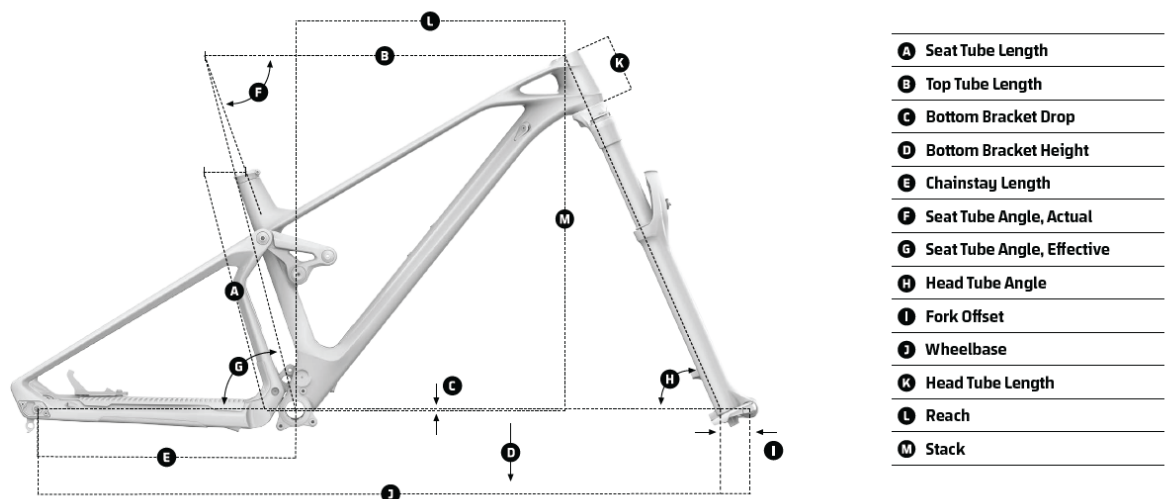

DOWNHILL SUMMUM CARBON

Size	S	M	L	XL
A Seat Tube Length	400 mm	400 mm	400 mm	400 mm
B Top Tube Length	575 mm	595 mm	620 mm	645 mm
C Bottom Bracket Drop	-20 mm	-20 mm	-20 mm	-20 mm
D Bottom Bracket Height	350 mm	350 mm	350 mm	350 mm
E Chainstay Legth	450/455/460 mm	450/455/460 mm	450/455/460 mm	450/455/460 mm
F Seat Tube Angle, Actual	69°	68,5°	69°	69°
G Seat Tube Angle, Effective	77°	77°	77°	77°
H Head Tube Angle	63°	63,5°	63,5°	63,5°
I Fork Offset	56 mm	56 mm	56 mm	56 mm
J Wheelbase	1260 mm	1270 mm	1295 mm	1320 mm
K Head Tube Length	110 mm	110 mm	112 mm	112 mm
L Reach	430 mm	450 mm	475 mm	500 mm
M Stack	632 mm	633 mm	632 mm	632 mm

Fotogalerie

