

RAZE R, CHERRY RED/NIMBUS GREY, 2023

obj. č. 010.23081

Doporučená cena

117.499 Kč

Akční cena

82.999 Kč



Technické specifikace

vyroběné velikosti S: 380mm / M: 420mm / L: 470mm / XL: 510mm	rám Raze 29 6061 Alloy Stealth Evo, hydroformed tubing, Zero Suspension System, 130mm travel, Forward Geometry, one piece Monoblock upper link, Boost 12x148mm rear axle, tapered head tube, 73mm BSA bottom bracket, dedicated 1x drivetrain design, telescopic seatpost internal routing, MAX capacity sealed bearings, ISCG 05
vidlice Fox 36 29 Float GRIP EVOL Rhythm, 150mm, tapered steerer tube, Boost 15x110mm axle, offset 44mm. Settings: sweep adjust compression, low-speed rebound, air preload	hlavové složení Onoff Saturn tapered for 1-1/8" to 1-1/2" head tube, ACB sealed bearings, top 41x30.2x7x45°x45°, bottom 51.9x40x8x45°x45°
přehazovačka Sram GX Eagle, Type 3 roller bearing clutch, cage lock, 1x12s, X-Actuation 1:1	řazení Sram Trigger NX Eagle, 12s, X-Actuation 1:1
brzdové páčky Sram G2 R, tool-free reach adjust	kliky Truvativ Stylo 7k Eagle, Boost, DUB axle, Direct mount chain ring, S/M size: 170mm, L/XL size: 175mm
středové složení Sram DUB BSA, sealed bearings, 73mm	řídítka Onoff Sulfur 1.0 double butted 6061 alloy, rise: 20mm, width: 800mm, 9° backsweep, 5° upsweep, 31.8mm barbore
představec Onoff Sulfur FG 30mm 0°, 6061 forged alloy, 31.8mm barbore	sedlovka Onoff Pija dropper internal, diameter 31.6mm, S size: 405x95-125mm, M size 458x120-150mm, L size: 498x140-170mm, XL size: 498x140-170mm
sedlo MDK series PU 2023	náboj přední Infinity hub, Boost 15x110mm, IS 6 bolts
náboj zadní Infinity hub, ID360 freewheel technology, Boost 12x148mm, IS 6 bolts	řetěz Sram NX Eagle, 12s, Powerlock
kazeta Sram XG-1230, 11-50T, 12s	dráty 24 straight-pull double butted spokes
ráfky Mavic CrossMax XL S, 29 Boost 30mm internal width, hookless, tubeless ready, 24 spokes	pláště Maxxis Dissector 29x2.4 WT, tubeless ready, 3C MAXX TERRA compound, EXO+ protection, 120TPI, folding bead / Maxxis Aggressor 29x2.3, tubeless ready, dual compound, Exo protection, 60TPI, folding bead
a151 010.23081	obj.c. 010.23081

gripy
Onoff Twin, 1lock-on, 135mm

tlumič
Fox Float DPS LV EVOL Performance, 205x57.5mm. Settings: rebound, 3-position compression adjustment (Open/Mid/Lock), air preload. Trunnion top mount, 30x8mm bottom bushings

přední brzda
Sram G2 R, 4-piston caliper, Centerline 180mm IS 6 bolts one-piece rotor, steel-backed organic pads


zadní brzda
Sram G2 R, 4-piston caliper, Centerline 180mm IS 6 bolts one-piece rotor, steel-backed organic pads

nastavení tlumiče
Light compression, light rebound, air volume spacer 0.6

převodník
32T, CNC-machined alloy, X-SYNC 2

patka k přehazovačce
Sram UDH

Geometrie

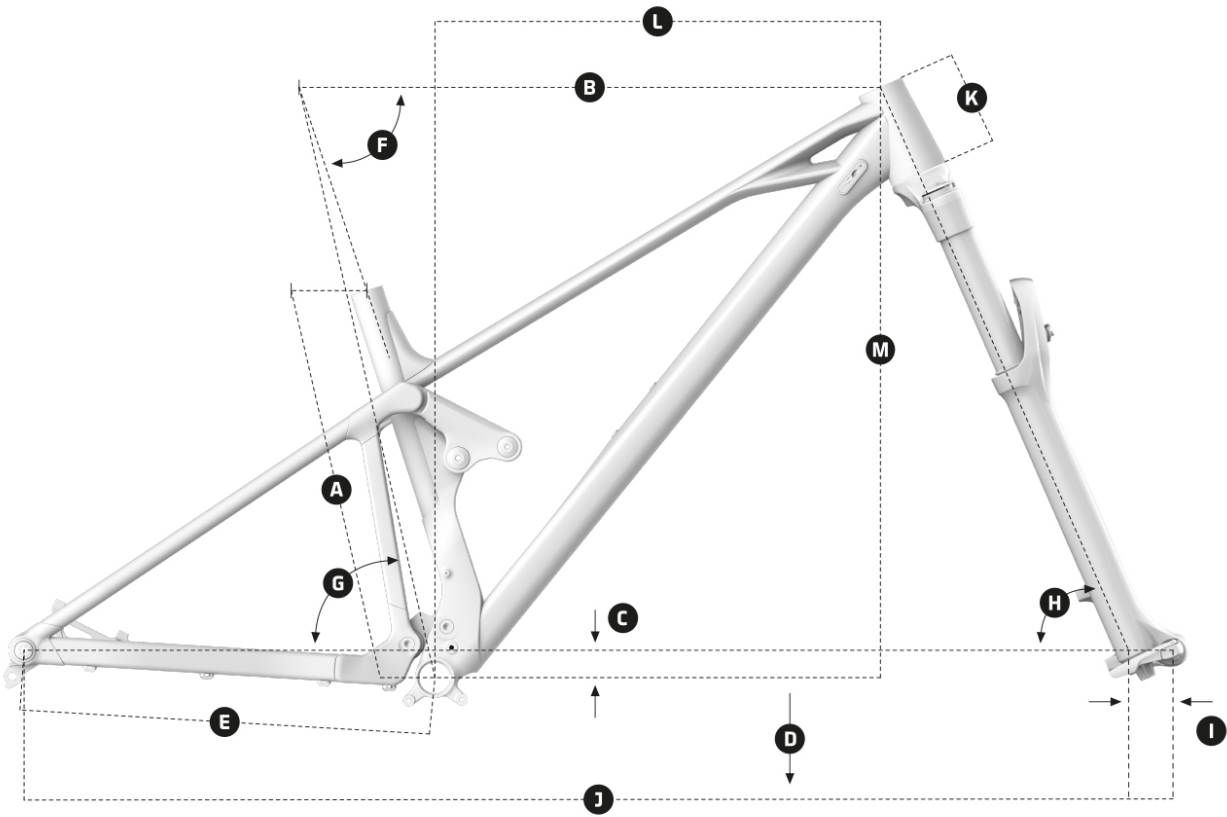

TRAIL RAZE

Size	S	M	L	XL
A Seat Tube Length	375 mm	415 mm	445 mm	490 mm
B Top Tube Length	594 mm	614 mm	638 mm	658 mm
C Bottom Bracket Drop	-29 mm	-29 mm	-29 mm	-29 mm
D Bottom Bracket Height	340 mm	340 mm	340 mm	340 mm
E Chainstay Length	435 mm	435 mm	435 mm	435 mm
F Seat Tube Angle, Actual	72°	72°	72°	72°
G Seat Tube Angle, Effective	76.5°	76.5°	76.5°	76.5°
H Head Tube Angle	65.5°	65.5°	65.5°	65.5°
I Fork Offset	44 mm	44 mm	44 mm	44 mm
J Wheelbase	1197 mm	1216 mm	1246 mm	1266 mm
K Head Tube Length	100 mm	100 mm	120 mm	120 mm
L Reach	450 mm	470 mm	490 mm	510 mm
M Stack	623 mm	623 mm	641 mm	641 mm

Fotogalerie

