

PLAY 24, RACING SILVER/BLEU MARLIN, 2023

obj. č.: 010.23208



Technické specifikace


vyráběné velikosti One size: 320mm	rám Play 24 6061 Alloy Stealth evo, hydroformed tubing, integrated internal non-removable battery, Tapered head tube, HHG internal cable routing, BSA bottom bracket, QR 9mm rear axle, 1x drivetrain compatible
vidlice RockShox Judy Silver TK 26, 100mm, TurnKey, Solo Air, tapered steerer tube, 9x100mm axle, 30mm steel stanchions, 40mm offset. Settings: compression adjustment at low-speed to lock, rebound, air preload	přehazovačka Sram NX, 11s, long cage, X-actuation 1:1
řazení Sram trigger NX 11s, X-actuation 1:1	brzdové páčky Sram Level, toolod reach adjust, lever pivot bushings
kliky Samox DM 28T steel, 127mm	středové složení BSA, 73mm
řídítka MDK XC 1.0, 6061 alloy, rise: 25mm, width: 580mm, 9° backsweep, 5° upsweep, 31.8mm barbore	představec Onoff Sulfur FG 30mm 0°, 6061 forged alloy, 31.8mm barbore
sedlovka MDK XC 0-R, 6061 T6 Alloy, diameter 31.6mm, length 300mm	sedlo SDG Fly JR
náboj přední Formula DC20LW, 9x100mm, cup cone ball bearings, IS 6 bolts	náboj zadní Mahle-Ebikemotion X-35
řetěz Sram PC1110 11s, Powerlock	kazeta Sram PG 1030 11-42T, 11s
dráty CN round stainless steel	ráfky MDK-XP1 24 TLR, 25mm internal width, tubeless ready, 32 spokes
pláště Kenda Booster 24x2.4 single compound 30TPI, wire bead	a151 010.23208
obj.c. 010.23208	gripy Onoff Twin, 1lock-on
přední brzda Sram Level, 2 piece caliper, Centerline 160mm IS 6 bolts one-piece rotor, steel-backed organic pad	zadní brzda Sram Level, 2 piece caliper, Centerline 160mm IS 6 bolts one-piece rotor, steel-backed organic pad
převodník 28T, steel	patka k přehazovačce Mondraker M073

motor+batterie

Mahle-Ebikemotion X-35, Mahle-Ebikemotion Internal 250Wh, Mahle-Ebikemotion

Geometrie**e-KIDS / YOUTH****PLAY 26 / 24 / 20**

Size	26	24	20
A Seat Tube Length	350 mm	320 mm	260 mm
B Top Tube Length	567 mm	517 mm	475 mm
C Bottom Bracket Drop	-30 mm	-30 mm	-15 mm
D Bottom Bracket Height	300 mm	280 mm	240 mm
E Chainstay Legth	420 mm	405 mm	355 mm
F Seat Tube Angle, Actual	72°	72°	72°
G Seat Tube Angle, Effective	72°	72°	72°
H Head Tube Angle	68°	68°	68°
I Fork Offset	40 mm	40 mm	40 mm
J Wheelbase	1060 mm	994 mm	903 mm
K Head Tube Length	100 mm	100 mm	100 mm
L Reach	390 mm	350 mm	340 mm
M Stack	546 mm	537 mm	387 mm

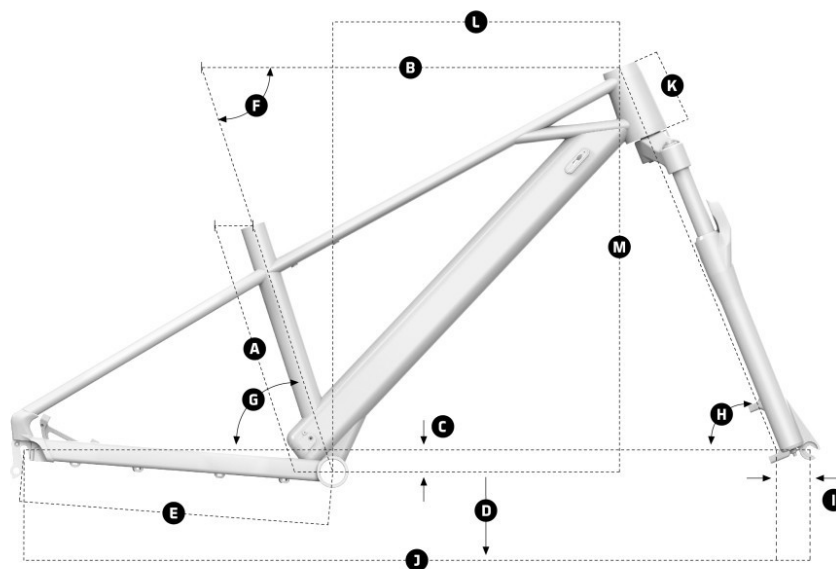

Fotogalerie

