

# SUMMUM R 29, BRITISH RACING GREEN/BLACK/ÖHLINS YELLOW, 2022

obj. č.: 010.22088




Veškeré know-how za 20 let historie značky Mondraker. Model Summum s hliníkovým rámem STEALTH, který byl uveden na trh v minulé sezóně, je stále jedním z nejžádanějších. Je v něm pevně zabudováno veškeré know-how, které jsme získali během dvacetileté historie značky Mondraker. DH kolo, které vás překvapí svou nízkou hmotností. K dispozici ve variantách s 29" koly nebo MX a také ve 4 různých velikostech.

## Technické specifikace

|                                                                                                                                                                                                                                                                                                                                         |                                                                                                                                                                                                  |
|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>vyráběné velikosti</b><br>S / M / L / XL 29                                                                                                                                                                                                                                                                                          | <b>hmotnost</b><br>17,5 Kg                                                                                                                                                                       |
| <b>rám</b><br>Summum 29 6061 Alloy Stealth Evo, hydroformed tubing, Zero suspension system, 200mm travel, Forward Geometry, alloy upper link with shock eyelet bearings, SuperBoost 12x157mm rear axle, 83mm BSA bottom bracket, MAX. capacity dual raw Enduro bearings, HHG internal cable routing, ISCG 05.<br>*Optional Geometry kit | <b>vidlice</b><br>Fox 40 29 Float FIT GRIP EVOL Performance, 203mm, air spring, 1-1/8" steerer tube, 20x110mm axle, offset 56mm. Settings: low-speed compression, low-speed rebound, air preload |
| <b>hlavové složení</b><br>Onoff Mercurium 1.5 ZS for 1-1/8" steerer tube, 41x30.15x7x45°x45° ACB sealed bearings, geometry kit cups, external diameter 56mm                                                                                                                                                                             | <b>přehazovačka</b><br>Sram GX DH, 7s, medium cage, X-actuation 1:1                                                                                                                              |
| <b>řazení</b><br>Sram trigger GX DH 7s, X-actuation 1:1                                                                                                                                                                                                                                                                                 | <b>brzdové páčky</b><br>Sram Code R, tool-free reach adjust                                                                                                                                      |
| <b>kliky</b><br>Truvativ Descendant DH, DUB axle, Direct mount chain ring, 165mm                                                                                                                                                                                                                                                        | <b>středové složení</b><br>Sram DUB BSA, sealed bearings, 83mm                                                                                                                                   |
| <b>řídítka</b><br>Onoff Sulfur 1.0 double butted 6061 alloy, rise: 20mm, width: 800mm, 9° backsweep, 5° upsweep, 31.8mm bar bore                                                                                                                                                                                                        | <b>sedlovka</b><br>SDG Micro I-Beam SP-751 Alloy, diameter 31.6mm, length 300mm, micro-adjustment                                                                                                |
| <b>sedlo</b><br>SDG I-Fly 2.0 I-Beam, high-density PU foam, Cordura sides                                                                                                                                                                                                                                                               | <b>náboj přední</b><br>e*thirteen Boost 20x110mm, triple-sealed, fully machined aluminum, IS 6 bolts                                                                                             |
| <b>řetěz</b><br>Sram PC1110 11s, Powerlock                                                                                                                                                                                                                                                                                              | <b>kazeta</b><br>Sram PG 720 11-25T, 7s                                                                                                                                                          |
| <b>dráty</b><br>e*thirteen custom Hive triple-buttressed black alloy, alloy nipples, nipple washers                                                                                                                                                                                                                                     | <b>ráfky</b><br>e*thirteen LG1 Plus DH, IW29 29                                                                                                                                                  |

|                                                                                                                                                                                                                                   |                                                                                                                                               |
|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------|
| <b>pláště</b><br>Michelin DH34 29x2.4, tubeless ready, Magi-X DH compound, double-reinforced DH shield casing, wire bead, Michelin DH34 29x2.4, tubeless ready, Magi-X DH compound, double-reinforced DH shield casing, wire bead |                                                                                                                                               |
| <b>obj.c.</b><br>010.22088                                                                                                                                                                                                        | <b>a151</b><br>010.22088                                                                                                                      |
| <b>tlumič</b><br>Fox DHX2 Performance Elite, 225x70mm. Settings: low-speed compression, low-speed rebound, spring preload. Trunnion top mount, 30x8mm bottom bushings                                                             | <b>gripy</b><br>Onoff Diamond, 1lock-on, 135mm                                                                                                |
| <b>zadní brzda</b><br>Sram Code R, oversized 4-piston caliper, Centerline 203mm IS 6 bolts one-piece rotor, steel-backed metal sintered pads                                                                                      | <b>přední brzda</b><br>Sram Code R, oversized 4-piston caliper, Centerline 203mm IS 6 bolts one-piece rotor, steel-backed metal sintered pads |
| <b>převodník</b><br>34T, steel, X-SYNC, E.13 Vario Compact Upper Slider ,Alloy backplate ,DMB (Direct mount Bashguard) Lower Slider 34-36t, ISCG 05 adjustable upper slider                                                       | <b>nastavení tlumiče</b><br>ECC010 compression, ECR012 rebound. Spring rate: S size 400 lbs, M size 450 lbs, L/XL size 500 lbs                |
| <b>ostatní</b><br>*Optional geometry kit: +-1° / +-2° headset cups                                                                                                                                                                | <b>patka k přehazovačce</b><br>Mondraker M068                                                                                                 |

Geometrie

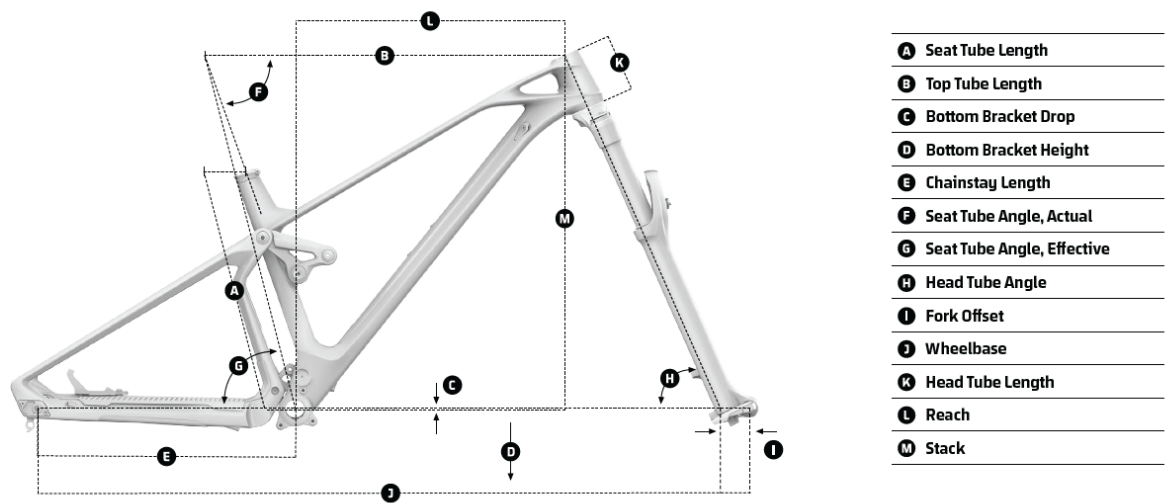

## DOWNHILL SUMMUM

| Size                                | S       | M       | L       | XL      |
|-------------------------------------|---------|---------|---------|---------|
| <b>A</b> Seat Tube Length           | 400 mm  | 400 mm  | 400 mm  | 400 mm  |
| <b>B</b> Top Tube Length            | 573 mm  | 593 mm  | 618 mm  | 643 mm  |
| <b>C</b> Bottom Bracket Drop        | -20 mm  | -20 mm  | -20 mm  | -20 mm  |
| <b>D</b> Bottom Bracket Height      | 350 mm  | 350 mm  | 350 mm  | 350 mm  |
| <b>E</b> Chainstay Legth            | 450 mm  | 450 mm  | 450 mm  | 450 mm  |
| <b>F</b> Seat Tube Angle, Actual    | 69°     | 69°     | 69°     | 69°     |
| <b>G</b> Seat Tube Angle, Effective | 77°     | 77°     | 77°     | 77°     |
| <b>H</b> Head Tube Angle            | 63°     | 63,5°   | 63,5°   | 63,5°   |
| <b>I</b> Fork Offset                | 58 mm   | 58 mm   | 58 mm   | 58 mm   |
| <b>J</b> Wheelbase                  | 1260 mm | 1270 mm | 1295 mm | 1320 mm |
| <b>K</b> Head Tube Length           | 112 mm  | 112 mm  | 112 mm  | 112 mm  |
| <b>L</b> Reach                      | 430 mm  | 450 mm  | 475 mm  | 500 mm  |
| <b>M</b> Stack                      | 632 mm  | 632 mm  | 632 mm  | 632 mm  |

## Fotogalerie

