

# CHASER, RED, 2021

obj. č: 010.21233




## Technické specifikace

|                                                                                                                                                                                                                                  |                                                                                                                                                                                                                                                                                                                                                                                               |
|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>barva rámečku</b><br>red                                                                                                                                                                                                      | <b>vyráběné velikosti</b><br>S 380mm / M 420mm / L 450mm / XL 490mm                                                                                                                                                                                                                                                                                                                           |
| <b>hmotnost</b><br>24,8 Kg                                                                                                                                                                                                       | <b>rám</b><br>Chaser 6061 Alloy Stealth Evo, e-Bike Optimized Zero Suspension System, 150mm travel, Forward Geometry, internal removable battery, Boost 12x148mm rear axle, tapered head tube, one-piece Monoblock upper link, HHG internal cable routing, MAX capacity sealed bearings, oversize 17mm axles, integrated dropout speed sensor, exclusive plastic motor covers, shock mudguard |
| <b>vidlice</b><br>RockShox 35 Silver TK 29, 160mm, TurnKey, Solo Air, tapered steerer tube, Boost 15x110mm axle, 35mm steel stanchions, 44mm offset. Settings: compression adjustment at low-speed to lock, rebound, air preload | <b>hlavové složení</b><br>Onoff Saturn tapered for 1-1/8 to 1-1/2 head tube, ACB sealed bearings, top 41x30.2x7x45x45, bottom 51.9x40x8x45x45                                                                                                                                                                                                                                                 |
| <b>přehazovačka</b><br>Sram SX Eagle, Type 3 roller bearing clutch, cage lock, long cage, 1x12s, X-actuation 1:1                                                                                                                 | <b>řazení</b><br>Sram Trigger SX Eagle, 12s, X-Actuation 1:1, single click                                                                                                                                                                                                                                                                                                                    |
| <b>brzdové páčky</b><br>Sram G2 R, tool-free reach adjust                                                                                                                                                                        | <b>kliky</b><br>Race Face Aeffect ebike, 165mm                                                                                                                                                                                                                                                                                                                                                |
| <b>řídítka</b><br>Onoff Sulfur 1.0 double butted 6061 alloy, rise: 20mm, width: 780mm, 9 backsweep, 5 upsweep, 31.8mm barbore Onoff Twin, 1lock-on, 135mm                                                                        | <b>představec</b><br>Onoff Sulfur FG 30mm 0, 6061 forged alloy, 31.8mm barbore                                                                                                                                                                                                                                                                                                                |
| <b>sedlovka</b><br>Onoff Pija dropper internal, diameter 31.6mm, S size: 387x125mm, M size: 425x150mm, L/XL size: 465x170mm                                                                                                      | <b>sedlo</b><br>Mondraker e-MTB custom design                                                                                                                                                                                                                                                                                                                                                 |
| <b>náboj přední</b><br>Formula DC711, Boost 15x110mm, sealed bearings, IS 6 bolts                                                                                                                                                | <b>náboj zadní</b><br>Formula EHL148 Boost 12x148mm, sealed bearings, IS 6 bolts                                                                                                                                                                                                                                                                                                              |
| <b>řetěz</b><br>Sram SX Eagle, 12s, Powerlock                                                                                                                                                                                    | <b>kazeta</b><br>Sram PG-1210, 11-50T, 12s                                                                                                                                                                                                                                                                                                                                                    |
| <b>dráty</b><br>CN round stainless steel                                                                                                                                                                                         | <b>ráfky</b><br>MDK-HP1 29, 30mm internal width, tubeless ready, 32 spokes                                                                                                                                                                                                                                                                                                                    |
| <b>pláště</b><br>Maxxis Rekon 29x2.6, tubeless ready, dual compound, EXO protection, 60TPI, folding bead                                                                                                                         | <b>obj.c.</b><br>010.21233                                                                                                                                                                                                                                                                                                                                                                    |
| <b>tlumič</b><br>RockShox Deluxe Select R Debonair, 205x65mm. Settings: Low-speed rebound, air preload. Trunnion top mount, 25x10mm bottom bushings                                                                              | <b>přední brzda</b><br>Sram G2 R, 4-piston caliper, Centerline 200mm IS 6 bolts one-piece rotor, steel-backed organic pads                                                                                                                                                                                                                                                                    |

|                                                                                                                              |                                                                                                                         |
|------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------|
| <b>zadní brzda</b><br>Sram G2 R, 4-piston caliper, Centerline 200mm IS 6 bolts<br>one-piece rotor, steel-backed organic pads | <b>omotávka</b><br>Maxxis Rekon 29x2.6, tubeless ready, dual compound, EXO<br>protection, 60TPI, folding bead           |
| <b>nastavení tlumiče</b><br>Light compression, Light rebound, 1 Token                                                        | <b>převodník</b><br>Sram X-Sync 2 Eagle 34T, steel, narrow-wide, 104 BCD                                                |
| <b>patka k přehazovačce</b><br>Mondraker M068                                                                                | <b>motor+baterie</b><br>Bosch Performance Line CX Cruise (25Km/h) GEN4, computer Bosch<br>Purion, Bosch Powertube 625Wh |

Geometrie

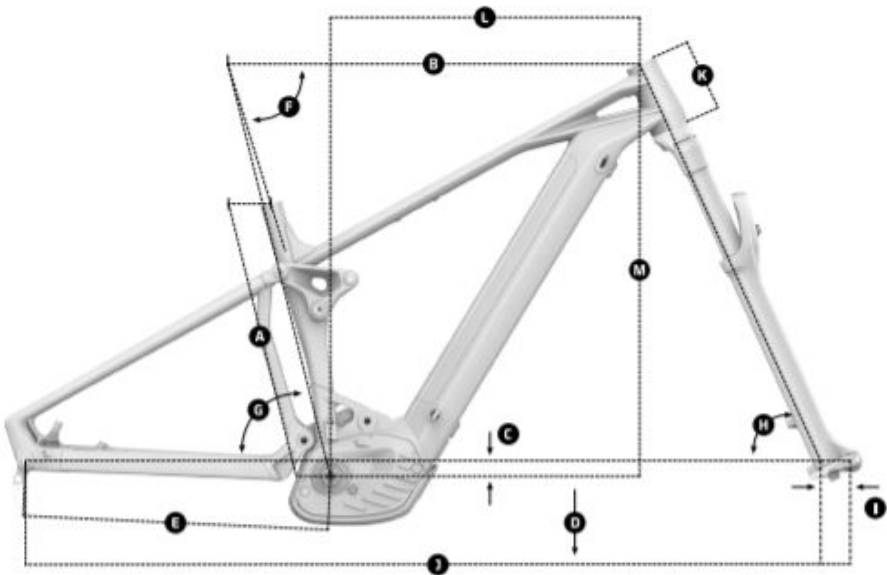

GEOMETRY

| Size                         | S       | M       | L       | XL      |
|------------------------------|---------|---------|---------|---------|
| A Seat Tube Length           | 380 mm  | 420 mm  | 450 mm  | 490 mm  |
| B Top Tube Length            | 605 mm  | 625 mm  | 650 mm  | 670 mm  |
| C Bottom Bracket Drop        | -25 mm  | -25 mm  | -25 mm  | -25 mm  |
| D Bottom Bracket Height      | 350 mm  | 350 mm  | 350 mm  | 350 mm  |
| E Chainstay Legth            | 455 mm  | 455 mm  | 455 mm  | 455 mm  |
| F Seat Tube Angle, Actual    | 73.5°   | 73.5°   | 73.5°   | 73.5°   |
| G Seat Tube Angle, Effective | 76°     | 76°     | 76°     | 76°     |
| H Head Tube Angle            | 65.5°   | 65.5°   | 65.5°   | 65.5°   |
| I Fork Offset                | 44 mm   | 44 mm   | 44 mm   | 44 mm   |
| J Wheelbase                  | 1225 mm | 1245 mm | 1265 mm | 1285 mm |
| K Head Tube Length           | 110 mm  | 110 mm  | 130 mm  | 130 mm  |
| L Reach                      | 450 mm  | 470 mm  | 490 mm  | 510 mm  |
| M Stack                      | 622 mm  | 622 mm  | 640 mm  | 640 mm  |