

CHRONO 29 (SPE), BLACK/SILVER, 2022

obj. č: 010.22004SPE




Chrono je především velmi dynamické kolo. Jeho rám je vyroben ze slitiny 6061 Xtralite Alloy a má naši XC FORWARD GEOMETRII, která vám zajistí optimální pozici pro efektivní šlapání a zároveň stabilitu a jistotu při sjezdech. Jedná se o kolo s nejnižší cenou v řadě Chrono, ale přesto vám poskytne všechny naše více než 20leté znalosti v oblasti výroby prvotřídních kol, což znamená, že si můžete užívat naši závodní DNA pokaždé, když na něj vyjedete.

Technické specifikace

vyráběné velikosti S: 395mm / M: 430mm / L: 470mm / XL: 520mm	hmotnost 12,9 Kg
rám Chrono 29 6061 Xtralite Alloy butted, XC Forward Geometry, 73mm BSA bottom bracket, tapered head tube, HHG Internal Cable Routing, Boost 12x148mm rear axle	vidlice X-Fusion RC32 29, 100mm, air spring, tapered steerer tube, Boost 15x110mm axle, 32mm aluminum stanchions, offset 51mm. Settings: 2 pos remote compression (open/lock), rebound, air preload. X-Fusion RC
hlavové složení Onoff Saturn tapered for 1-1/8" to 1-1/2" head tube, ACB sealed bearings, top 41x30.2x7x45°x45°, bottom 51.9x40x8x45°x45°	přehazovačka Sram SX Eagle, Type 3 roller bearing clutch, cage lock, long cage, 1x12s, X-actuation 1:1
řazení Sram Trigger SX Eagle, 12s, X-Actuation 1:1	brzdové páčky Sram Level TL, Direct Link actuation, tooled reach adjust, lever pivot bushings
kliky Sram SX Eagle, Boost, DUB axle, Direct Mount chain ring, S size: 170mm, M/L/XL size: 175mm	středové složení Sram DUB BSA, sealed bearings, 73mm
řídítka Onoff Sulfur 0.2, double butted 6061 alloy, rise: 4.8mm, width: 740mm, 9° backsweep, 0° upsweep, 31.8mm barbore	představec Onoff Sulfur, 6061 T6 Alloy, 31.8mm barbore, rise: +/-7°, length: sizes S/M: 60mm, size L: 80mm, size XL: 90mm
sedlovka Onoff Sulfur 0-R, 6061 T6 Alloy, 3D forged, diameter 27.2mm, length 400mm	sedlo Mondraker XC Series, steel rail
náboj přední Formula DC20LW, 9x100mm, cup & cone ball bearings, IS 6 bolts	náboj zadní Formula MST148S-4SB, Boost 12x148mm, sealed bearings, IS 6 bolts, MS freehub
řetěz Sram SX Eagle, 12s, Powerlock	kazeta Sram PG-1210, 11-50T, 12s
dráty CN round stainless steel	ráfky MDK-XP1 29 TLR, 25mm internal width, tubeless ready, 32 spokes

pláště Maxxis Ikon 29x2.20, 60TPI, wire bead, Maxxis Ikon 29x2.20, 60TPI, wire bead	a151 010.22004SPE
obj.c. 010.22004SPE	gripy Onoff Diamond, 1lock-on, 135mm
přední brzda Sram Level TL, 2 piece caliper, Centerline 160mm IS 6 bolts one-piece rotor, steel-backed organic pad	zadní brzda Sram Level TL, 2 piece caliper, Centerline 160mm IS 6 bolts one-piece rotor, steel-backed organic pad
převodník 34T, steel, X-Sync 2	patka k přehazovačce Mondraker M068

Geometrie

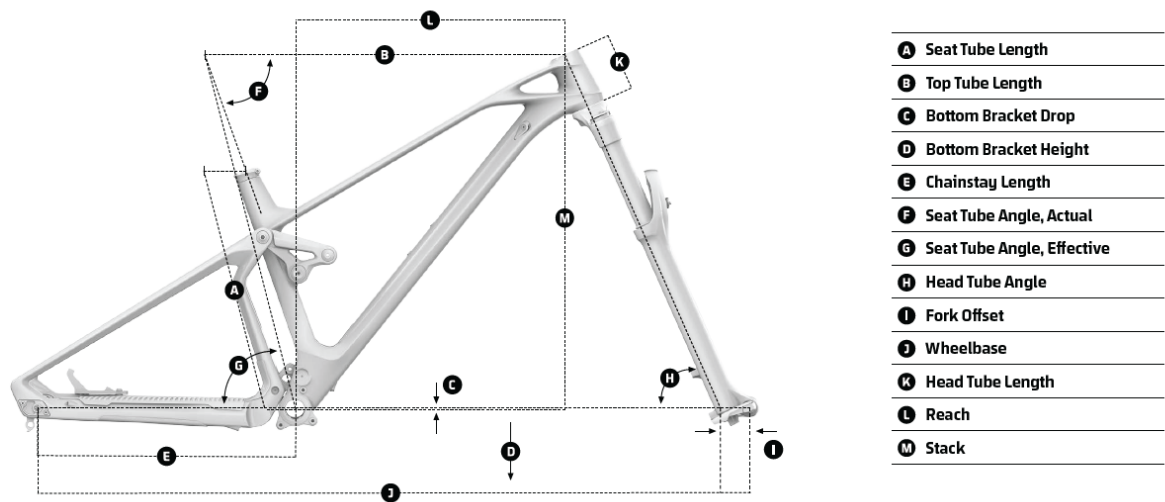

XC PRO
CHRONO

Size	S	M	L	XL
A Seat Tube Length	395 mm	430 mm	470 mm	520 mm
B Top Tube Length	590 mm	610 mm	630 mm	650 mm
C Bottom Bracket Drop	-65 mm	-65 mm	-65 mm	-65 mm
D Bottom Bracket Height	305 mm	305 mm	305 mm	305 mm
E Chainstay Legth	435 mm	435 mm	435 mm	435 mm
F Seat Tube Angle, Actual	72.5°	72.5°	72.5°	72.5°
G Seat Tube Angle, Effective	73.5°	73.5°	73.5°	73.5°
H Head Tube Angle	70°	70°	70°	70°
I Fork Offset	44 / 46 mm	44 / 46 mm	44 / 46 mm	44 / 46 mm
J Wheelbase	1087 mm	1107 mm	1127 mm	1148 mm
K Head Tube Length	100 mm	100 mm	110 mm	125 mm
L Reach	406 mm	426 mm	444 mm	460 mm
M Stack	618 mm	618 mm	628 mm	642 mm

Fotogalerie

