

CRAFTY CARBON RR, BLUE/WHITE/ORANGE, 2021

obj. č.: 010.21263




Technické specifikace

barva rámečku blue/white/orange	vyráběné velikosti S 380mm / M 420mm / L 450mm / XL 490mm
hmotnost 21,5 Kg	rám Crafty Stealth Air full Carbon, e-Bike Optimized Zero Suspension System, 150mm travel, Forward Geometry, internal non-removable battery, Boost 12x148mm rear axle, tapered head tube, one-piece Monoblock upper link, HHG internal cable routing, MAX capacity sealed bearings, oversize 17mm axles, integrated dropout speed sensor, exclusive plastic motor covers.
vidlice Fox 36 29 Float FIT4 EVOL Factory Kashima, 160mm, e-bike optimized, tapered steerer tube, Boost 15x110mm axle, 44mm offset, 68mm OD crown. Settings: 3 positions with micro adjust compression, low-speed rebound, air preload	hlavové složení Acros custom for 1-1/2 head tube, angular contact bearings 40x52x7, Internal cable routing
přehazovačka Shimano XT M8100, SGS, Shadow+, 12s	řazení Shimano XT M8100, Rapid Fire Plus, 12s
brzdové páčky Shimano XT M8100, ergonomic antiskid lever with servo wave, tool less reach adjust, free stroke adjust	kliky E.13 TRS Race carbon ebike, 165mm
řídítka Onoff Krypton Carbon 1.0, rise: 25mm, width: 780mm, 9° backsweep, 5° upsweep, 31.8mm barbare Onoff Desert, 1lock-on, 135mm, sizes: S/M L/XL	představec Onoff Krypton FG 30mm, 6061 forged alloy, 31.8mm barbare
sedlovka Onoff Pija dropper internal, diameter 31.6mm, S size: 387x125mm, M size: 425x150mm, L/XL size: 465x170mm	sedlo Fizik Antares R7
náboj přední DT 240, Boost 15x110mm, CenterLock	náboj zadní DT 240, Boost 12x148mm, 24T Ratchet system, CenterLock
řetěz Shimano XT M8100, 12s, Quick-link	kazeta Shimano XT M8100 10-51T Hyperglide+, 12s
dráty DT Hybrid SP, straightpull	ráfky DT Swiss HX1501 Spline One 29, 30mm internal width, tubeless ready, 28 spokes
pláště Maxxis Minion DHF 29x2.6, tubeless ready, 3C MAXX TERRA, EXO+ Protection, 120TPI, folding bead	obj.c. 010.21263

tlumič Fox Float DPS Factory Kashima, 205x65mm. Settings: Compression 3 positions lever, low-speed compression, low-speed rebound, air preload. Trunnion top mount, 25x10mm bottom bushings	přední brzda Shimano XT M8120, 4 piston caliper, MT800 ICE-Tech 203mm CenterLock rotor, resin pads with fin
zadní brzda Shimano XT M8120, 4 piston caliper, MT800 ICE-Tech 203mm CenterLock rotor, resin pads with fin	omotávka Maxxis Minion DHR II 29x2.6, tubeless ready, 3C MAXX TERRA, EXO+ Protection, 120TPI, folding bead
nastavení tlumiče Medium compression, Medium rebound, 0.4 volume spacer	převodník Shimano E8000 34T, steel, 104 BCD
patka k přehazovačce Mondraker M068	motor+baterie Bosch Performance Line CX Cruise (25Km/h) GEN4, computer Bosch Kiox, Bosch Powertube 625Wh

Geometrie

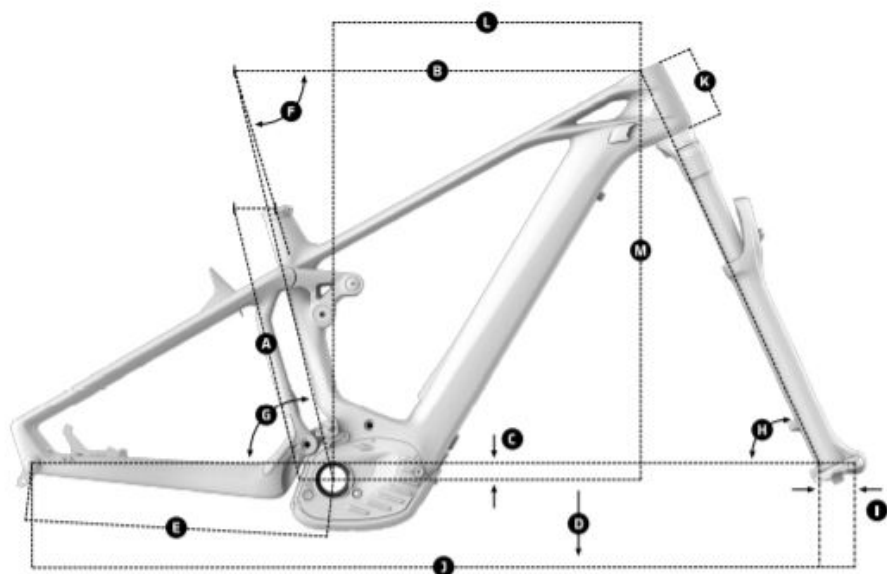

GEOMETRY

Size	S	M	L	XL
A Seat Tube Length	380 mm	420 mm	450 mm	480 mm
B Top Tube Length	605 mm	625 mm	650 mm	670 mm
C Bottom Bracket Drop	-25 mm	-25 mm	-25 mm	-25 mm
D Bottom Bracket Height	350 mm	350 mm	350 mm	350 mm
E Chainstay Legth	455 mm	455 mm	455 mm	455 mm
F Seat Tube Angle, Actual	73.5°	73.5°	73.5°	73. 5°
G Seat Tube Angle, Effective	76°	76°	76°	76°
H Head Tube Angle	65.5°	65.5°	65.5°	65.5°
I Fork Offset	44 mm	44 mm	44 mm	44 mm
J Wheelbase	1225 mm	1245 mm	1270 mm	1290 mm
K Head Tube Length	110 mm	110 mm	130 mm	130 mm
L Reach	450 mm	470 mm	490 mm	510 mm
M Stack	622 mm	622 mm	640 mm	640 mm