

# FOXY R 29, DEEP PURPLE/FLAME RED, 2022

obj. č.: 010.22068



Doporučená cena

**124.799 Kč**

## Technické specifikace

|                                                                                                                                                                                                                                                                                                                                             |                                                                                                                                                                                                                                                     |
|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>vyráběné velikosti</b><br>S: 380mm / M: 420mm / L: 470mm / XL: 510mm                                                                                                                                                                                                                                                                     | <b>hmotnost</b><br>14,9 Kg                                                                                                                                                                                                                          |
| <b>rám</b><br>Foxy 29 6061 Alloy Stealth Evo, hydroformed tubing, Zero Suspension System, 150mm travel, Forward Geometry, one piece Monoblock upper link, Boost 12x148mm rear axle, tapered head tube, 73mm BSA bottom bracket, dedicated 1x drivetrain design, telescopic seatpost internal routing, MAX capacity sealed bearings, ISCG 05 | <b>vidlice</b><br>Öhlins RXF 36 M.2 29, 160mm, TTX18 Twin Tube cartridge, tapered steerer tube, Boost 15x110mm axle, offset 44mm. Settings: high speed compression lever with climb mode, low-speed compression, rebound, air preload, ramp chamber |
| <b>hlavové složení</b><br>Onoff Saturn tapered for 1-1/8" to 1-1/2" head tube, ACB sealed bearings, top 41x30.2x7x45°x45°, bottom 51.9x40x8x45°x45°                                                                                                                                                                                         | <b>přehazovačka</b><br>Sram NX Eagle, Type 3 roller bearing clutch, cage lock, 1x12s, X-Actuation 1:1                                                                                                                                               |
| <b>řazení</b><br>Sram Trigger SX Eagle, 12s, X-Actuation 1:1                                                                                                                                                                                                                                                                                | <b>brzdové páčky</b><br>Sram G2 R, SwingLink, tool-free reach adjust                                                                                                                                                                                |
| <b>kličky</b><br>Sram SX Eagle, Boost, DUB axle, Direct Mount chain ring, S/M size: 170mm, L/XL size: 175mm                                                                                                                                                                                                                                 | <b>středové složení</b><br>Sram DUB BSA, sealed bearings, 73mm                                                                                                                                                                                      |
| <b>řídítka</b><br>Onoff Sulfur 1.0 double butted 6061 alloy, rise: 20mm, width: 800mm, 9° backsweep, 5° upsweep, 31.8mm barbare                                                                                                                                                                                                             | <b>představec</b><br>Onoff Sulfur FG 30mm 0°, 6061 forged alloy, 31.8mm barbare                                                                                                                                                                     |
| <b>sedlovka</b><br>Onoff Pija dropper internal, diameter 31.6mm, S size: 337x100mm, M size 387x125mm, L size: 425x150mm, XL size: 465x170mm                                                                                                                                                                                                 | <b>sedlo</b><br>SDG BEL-AIR 3.0, LPU foam, steel rails                                                                                                                                                                                              |
| <b>náboj přední</b><br>DT 370, Boost 15x110mm, IS 6 bolts                                                                                                                                                                                                                                                                                   | <b>náboj zadní</b><br>DT 370, Boost 12x148mm, 18T Ratched LN system, IS 6 bolts,                                                                                                                                                                    |
| <b>řetěz</b><br>Sram SX Eagle, 12s, Powerlock                                                                                                                                                                                                                                                                                               | <b>kazeta</b><br>Sram XG-1230, 11-50T, 12s                                                                                                                                                                                                          |
| <b>dráty</b><br>DT Champion, straightpull                                                                                                                                                                                                                                                                                                   | <b>ráfky</b><br>DT Swiss E1900 Spline 29, 30mm internal width, sleeved aluminum, tubeless ready, 28 spokes                                                                                                                                          |
| <b>pláště</b><br>Maxxis Minion DHF 29x2.5 WT, tubeless ready, 3C MAXX TERRA compound, EXO+ protection, 120TPI, folding bead, Maxxis Aggressor 29x2.3, tubeless ready, dual compound, Exo protection, 60TPI, folding bead                                                                                                                    | <b>a151</b><br>010.22068                                                                                                                                                                                                                            |
| <b>obj.c.</b><br>010.22068                                                                                                                                                                                                                                                                                                                  | <b>gripy</b><br>Onoff Diamond, 1lock-on, 135mm                                                                                                                                                                                                      |

**tlumič**  
Öhlins TTX Air 205x62.5mm. Settings: high speed compression lever with climb mode, low-speed compression, rebound, air preload. Trunnion top mount, 22.2x10mm bottom bushings

**zadní brzda**  
Sram G2 R, 4-piston caliper, Centerline 180mm IS 6 bolts one-piece rotor, steel-backed organic pads


**převodník**  
32T, CNC-machined alloy, X-SYNC 2

**přední brzda**  
Sram G2 R, 4-piston caliper, Centerline 200mm IS 6 bolts one-piece rotor, steel-backed organic pads

**nastavení tlumiče**  
C20 compression, R35 rebound

**patka k přehazovačce**  
Mondraker M068

Geometrie

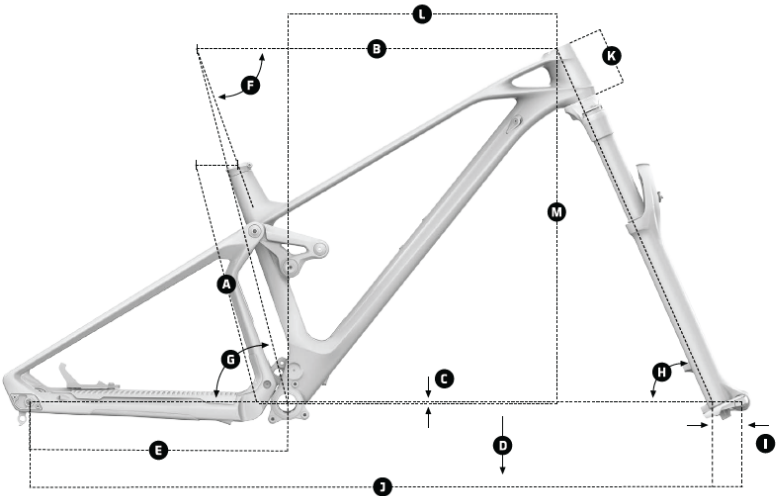

|   |                            |
|---|----------------------------|
| A | Seat Tube Length           |
| B | Top Tube Length            |
| C | Bottom Bracket Drop        |
| D | Bottom Bracket Height      |
| E | Chainstay Length           |
| F | Seat Tube Angle, Actual    |
| G | Seat Tube Angle, Effective |
| H | Head Tube Angle            |
| I | Fork Offset                |
| J | Wheelbase                  |
| K | Head Tube Length           |
| L | Reach                      |
| M | Stack                      |

ENDURO  
FOXY

| Size                         | S       | M       | L       | XL      |
|------------------------------|---------|---------|---------|---------|
| A Seat Tube Length           | 380 mm  | 420 mm  | 470 mm  | 510 mm  |
| B Top Tube Length            | 606 mm  | 629 mm  | 654 mm  | 678 mm  |
| C Bottom Bracket Drop        | -21 mm  | -21 mm  | -21 mm  | -21 mm  |
| D Bottom Bracket Height      | 355 mm  | 355 mm  | 355 mm  | 355 mm  |
| E Chainstay Legth            | 435 mm  | 435 mm  | 435 mm  | 435 mm  |
| F Seat Tube Angle, Actual    | 71°     | 71°     | 71°     | 71°     |
| G Seat Tube Angle, Effective | 76°     | 76°     | 76°     | 76°     |
| H Head Tube Angle            | 66°     | 66°     | 66°     | 66°     |
| I Fork Offset                | 44 mm   | 44 mm   | 44 mm   | 44 mm   |
| J Wheelbase                  | 1193 mm | 1222 mm | 1248 mm | 1274 mm |
| K Head Tube Length           | 90 mm   | 100 mm  | 115 mm  | 130 mm  |
| L Reach                      | 450 mm  | 475 mm  | 495 mm  | 515 mm  |
| M Stack                      | 606 mm  | 615 mm  | 630 mm  | 643 mm  |

## Fotogalerie

---

