

FOXY R 29, DEEP PURPLE/FLAME RED, 2022

obj. č. 010.22068



Doporučená cena
124.799 Kč

Technické specifikace

vyráběné velikosti

S: 380mm / M: 420mm / L: 470mm / XL: 510mm

hmotnost

14,9 Kg

rám

Foxy 29 6061 Alloy Stealth Evo, hydroformed tubing, Zero Suspension System, 150mm travel, Forward Geometry, one piece Monoblock upper link, Boost 12x148mm rear axle, tapered head tube, 73mm BSA bottom bracket, dedicated 1x drivetrain design, telescopic seatpost internal routing, MAX capacity sealed bearings, ISCG 05

vidlice

Öhlins RXF 36 M.2 29, 160mm, TTX18 Twin Tube cartridge, tapered steerer tube, Boost 15x110mm axle, offset 44mm. Settings: high speed compression lever with climb mode, low-speed compression, rebound, air preload, ramp chamber

hlavové složení

Onoff Saturn tapered for 1-1/8" to 1-1/2" head tube, ACB sealed bearings, top 41x30.2x7x45°x45°, bottom 51.9x40x8x45°x45°

přehazovačka

Sram NX Eagle, Type 3 roller bearing clutch, cage lock, 1x12s, X-Actuation 1:1

řazení

Sram Trigger SX Eagle, 12s, X-Actuation 1:1

brzdové páčky

Sram G2 R, SwingLink, tool-free reach adjust

kličky

Sram SX Eagle, Boost, DUB axle, Direct Mount chain ring, S/M size: 170mm, L/XL size: 175mm

středové složení

Sram DUB BSA, sealed bearings, 73mm

řídítka

Onoff Sulfur 1.0 double butted 6061 alloy, rise: 20mm, width: 800mm, 9° backsweep, 5° upsweep, 31.8mm bar bore

představec

Onoff Sulfur FG 30mm 0°, 6061 forged alloy, 31.8mm bar bore

sedlovka

Onoff Pija dropper internal, diameter 31.6mm, S size: 337x100mm, M size 387x125mm, L size: 425x150mm, XL size: 465x170mm

sedlo

SDG BEL-AIR 3.0, LPU foam, steel rails

náboj přední

DT 370, Boost 15x110mm, IS 6 bolts

náboj zadní

DT 370, Boost 12x148mm, 18T Ratched LN system, IS 6 bolts,

řetěz

Sram SX Eagle, 12s, Powerlock

kazeta

Sram XG-1230, 11-50T, 12s

dráty

DT Champion, straightpull

ráfky

DT Swiss E1900 Spline 29, 30mm internal width, sleeved aluminum, tubeless ready, 28 spokes

pláště

Maxxis Minion DHF 29x2.5 WT, tubeless ready, 3C MAXX TERRA compound, EXO+ protection, 120TPI, folding bead, Maxxis Aggressor 29x2.3, tubeless ready, dual compound, Exo protection, 60TPI, folding bead

a151

010.22068

obj.c.

010.22068

gripy

Onoff Diamond, 1lock-on, 135mm

tlumič
Öhlins TTX Air 205x62.5mm. Settings: high speed compression lever with climb mode, low-speed compression, rebound, air preload. Trunnion top mount, 22.2x10mm bottom bushings

zadní brzda
Sram G2 R, 4-piston caliper, Centerline 180mm IS 6 bolts one-piece rotor, steel-backed organic pads


převodník
32T, CNC-machined alloy, X-SYNC 2

přední brzda
Sram G2 R, 4-piston caliper, Centerline 200mm IS 6 bolts one-piece rotor, steel-backed organic pads

nastavení tlumiče
C20 compression, R35 rebound

patka k přehazovačce
Mondraker M068

Geometrie

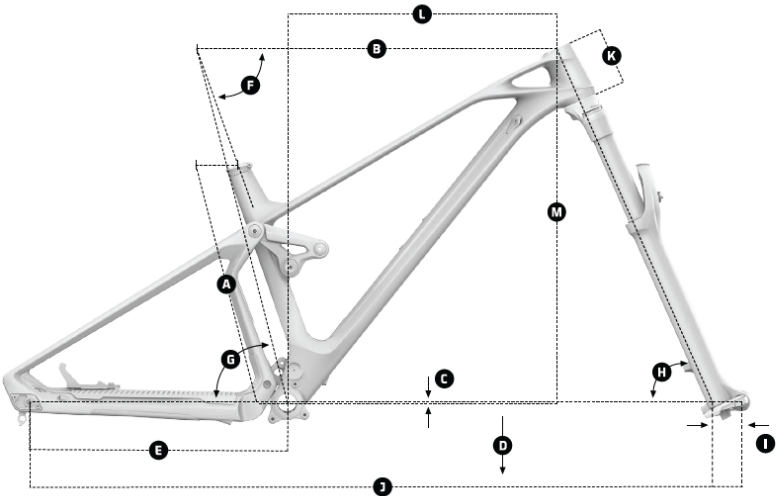

A	Seat Tube Length
B	Top Tube Length
C	Bottom Bracket Drop
D	Bottom Bracket Height
E	Chainstay Length
F	Seat Tube Angle, Actual
G	Seat Tube Angle, Effective
H	Head Tube Angle
I	Fork Offset
J	Wheelbase
K	Head Tube Length
L	Reach
M	Stack

ENDURO
FOXY

Size	S	M	L	XL
A Seat Tube Length	380 mm	420 mm	470 mm	510 mm
B Top Tube Length	606 mm	629 mm	654 mm	678 mm
C Bottom Bracket Drop	-21 mm	-21 mm	-21 mm	-21 mm
D Bottom Bracket Height	355 mm	355 mm	355 mm	355 mm
E Chainstay Legth	435 mm	435 mm	435 mm	435 mm
F Seat Tube Angle, Actual	71°	71°	71°	71°
G Seat Tube Angle, Effective	76°	76°	76°	76°
H Head Tube Angle	66°	66°	66°	66°
I Fork Offset	44 mm	44 mm	44 mm	44 mm
J Wheelbase	1193 mm	1222 mm	1248 mm	1274 mm
K Head Tube Length	90 mm	100 mm	115 mm	130 mm
L Reach	450 mm	475 mm	495 mm	515 mm
M Stack	606 mm	615 mm	630 mm	643 mm

Fotogalerie

