

CRAFTY CARBON RR MIND, CARBON/CHERRY RED, 2022

obj. č.: 010.22244



Doporučená cena

272.999 Kč

Technické specifikace

vyráběné velikosti

S: 380mm / M: 420mm / L: 450mm / XL: 490mm

hmotnost

23,3 kg

rám

Crafty Stealth Air full Carbon, e-Bike Optimized Zero Suspension System, 150mm travel, Forward Geometry, internal non-removable battery, Boost 12x148mm rear axle, tapered head tube, one-piece Monoblock upper link, HHG internal cable routing, MAX capacity sealed bearings, oversize 17mm axles, integrated dropout speed sensor, exclusive plastic motor covers.

vidlice

Fox 38 29 Float GRIP2 Factory Kashima, 160mm, e-bike optimized, tapered steerer tube, Boost 15x110mm axle, 44mm offset, 68mm OD crown. Settings: high and low-speed compression, high and low-speed rebound, air preload

hlavové složení

Acros custom for 1-1/2

přehazovačka

Sram X01 Eagle, Type 3 roller bearing clutch, cage lock, 1x12s, X-Actuation 1:1

řazení

Sram Trigger GX Eagle, 12s, X-Actuation 1:1, single click

brzdové páčky

Sram G2 RSC, SwingLink and lever pivot bearings, tools-free reach and contact point adjust

kliky

Race Face Aeffect ebike, 165mm

řidítka

Onoff Krypton Carbon 1.0, rise: 25mm, width: 800mm, 9° backsweep, 5° upsweep, 31.8mm barbare

představec

Onoff Krypton FG 30mm, CNC, 31.8mm barbare

sedlovka

Fox Transfer Factory Kashima internal, diameter 31.6mm, S size: 363.5x125mm, M/L size: 418.3x150mm, XL size: 475.1x175mm

sedlo

FIZIK Terra Aidon X5 145mm

náboj přední

Mavic, Boost 15x110mm, IS 6 bolts

náboj zadní

Mavic, Boost 12x148mm, ID360 Ratched system, IS 6 bolts, XD freehub

řetěz

Sram NX Eagle, 12s, Powerlock

kazeta

Sram XG-1275, 10-52T, 12s

dráty

Mavic straightpull duble butted, contactless lacing

ráfky

Mavic E-Deemax S 29, 30mm internal width, Maxtal welded, PFP, tubeless, 28 spokes

pláště

Maxxis Minion DHF 29x2.6, tubeless ready, 3C MAXX TERRA, EXO+ Protection, 120TPI, folding bead,

a151

010.22244

obj.c.

010.22244

gripy


Onoff Diamond, 1lock-on, 135mm

tlumič

Fox Float-X LV Factory Kashima, 205x65mm. Settings: compression 2 positions lever, low-speed compression, low-speed rebound, air preload. Trunnion top mount, 25x10mm bottom bushings

přední brzda Sram G2 RSC, 4-piston caliper, Centerline 200mm IS 6 bolts one-piece rotor, steel-backed organic pads	zadní brzda Sram G2 RSC, 4-piston caliper, Centerline 200mm IS 6 bolts one-piece rotor, steel-backed organic pads
nastavení tlumiče medium compression, medium rebound, air volume spacer 0.2	převodník Sram X-Sync 2 Eagle 34T, steel, narrow-wide, 104 BCD
patka k přehazovačce Mondraker M068	motor+baterie Bosch Performance Line CX Cruise (25Km/h) GEN4 BS3, Bosch Powertube 750Wh, Bosch Kiox 300

Geometrie

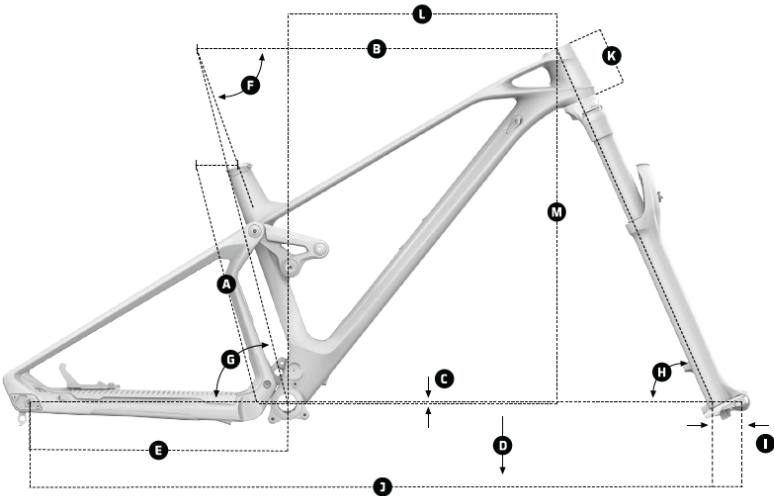

A	Seat Tube Length
B	Top Tube Length
C	Bottom Bracket Drop
D	Bottom Bracket Height
E	Chainstay Length
F	Seat Tube Angle, Actual
G	Seat Tube Angle, Effective
H	Head Tube Angle
I	Fork Offset
J	Wheelbase
K	Head Tube Length
L	Reach
M	Stack

e-MTB ENDURO
CRAFTY CARBON

Size	S	M	L	XL
A Seat Tube Length	380 mm	420 mm	450 mm	480 mm
B Top Tube Length	605 mm	625 mm	650 mm	670 mm
C Bottom Bracket Drop	-25 mm	-25 mm	-25 mm	-25 mm
D Bottom Bracket Height	350 mm	350 mm	350 mm	350 mm
E Chainstay Legth	455 mm	455 mm	455 mm	455 mm
F Seat Tube Angle, Actual	73.5°	73.5°	73.5°	73. 5°
G Seat Tube Angle, Effective	76°	76°	76°	76°
H Head Tube Angle	65.5°	65.5°	65.5°	65.5°
I Fork Offset	44 mm	44 mm	44 mm	44 mm
J Wheelbase	1225 mm	1245 mm	1265 mm	1285 mm
K Head Tube Length	110 mm	110 mm	130 mm	130 mm
L Reach	450 mm	470 mm	490 mm	510 mm
M Stack	622 mm	622 mm	640 mm	640 mm

Fotogalerie

