

FACTOR 24, GRAPHITE/DESERT GREY/ORANGE, 2023

obj. č: 010.23201

Doporučená cena
54.999 Kč



Technické specifikace


vyráběné velikosti One size: 300mm	rám "Factor 24 6061 Alloy Stealth Evo, hydroformed tubing, Zero Suspension System, 100mm travel, one piece bolt-on upper link, QR 9mm rear axle, 73mm BSA bottom bracket, HHG internal cable routing, dedicated 1x drivetrain design. 26" wheelset compatible"
vidlice X-Fusion Velvet RL 26, 100mm, air spring, tapered steerer tube, 9x100mm axle, 32mm aluminum stanchions, 41mm offset. Settings: lockout, rebound, air preload	hlavové složení Onoff Saturn tapered for 1-1/8" to 1-1/2" head tube, ACB sealed bearings, top 41x30.2x7x45°x45°, bottom 51.9x40x8x45°x45°
přehazovačka Sram SX Eagle, Type 3 roller bearing clutch, cage lock, long cage, 1x12s, X-actuation 1:1	řazení Sram Trigger SX Eagle, 12s, X-Actuation 1:1
brzdové páčky Sram Level, tooled reach adjust, lever pivot bushings	kliky Sram SX Eagle, DUB axle, Direct mount chain ring, 155mm
středové složení Sram DUB BSA, sealed bearings, 73mm	řídítka MDK XC 1.0, 6061 alloy, rise: 25mm, width: 680mm, 9° backsweep, 5° upsweep, 31.8mm barbare
představec Onoff Sulfur FG 30mm 0°, 6061 forged alloy, 31.8mm barbare	sedlovka Onoff Sulfur 0-R, 6061 T6 Alloy, 3D forged, diameter 31.6mm, length 400mm
sedlo SDG Fly JR	náboj přední Formula DC20LW, 9x100mm, cup cone ball bearings, IS 6 bolts
náboj zadní Formula DC22LW 9x135mm, cup cone ball bearings, IS 6 bolts	řetěz Sram SX Eagle, 12s, Powerlock
kazeta Sram PG-1230, 11-50T, 12s	dráty CN round stainless steel
ráfky MDK-XP1 24 TLR, 25mm internal width, tubeless ready, 32 spokes	pláště Kenda Booster 24x2.4 single compound 30TPI, wire bead
a151 010.23201	obj.c. 010.23201
gripy Onoff Twin, 1lock-on	tlumič X-Fusion 02PRO R, 210x47.5mm. Settings: low-speed rebound, air preload. 45x8mm top and bottom bushings
přední brzda Sram Level, 2 piece caliper, Centerline 160mm IS 6 bolts one-piece rotor, steel-backed organic pad	zadní brzda Sram Level, 2 piece caliper, Centerline 160mm IS 6 bolts one-piece rotor, steel-backed organic pad

nastavení tlumiče
A-Tune light compression

převodník
30T, steel, X-Sync

patka k přehazovačce
Mondraker M073

Geometrie

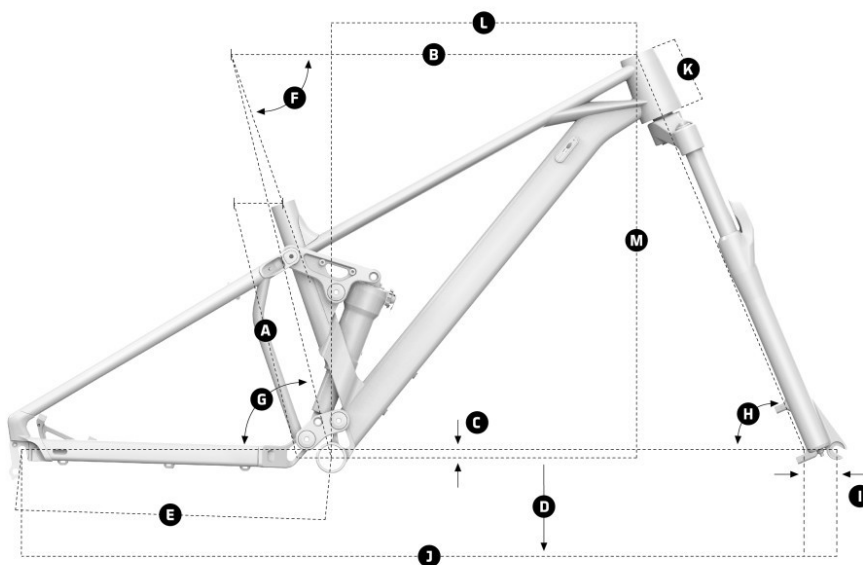

KIDS / YOUTH **FACTOR 26 / 24**

Size	26	24
A Seat Tube Length	350mm	320 mm
B Top Tube Length	550mm	510 mm
C Bottom Bracket Drop	-10 mm	-10 mm
D Bottom Bracket Height	320 mm	295 mm
E Chainstay Legth	420 mm	420 mm
F Seat Tube Angle, Actual	71°	71°
G Seat Tube Angle, Effective	76°	76°
H Head Tube Angle	67°	67°
I Fork Offset	41 mm	41 mm
J Wheelbase	1105 mm	1064 mm
K Head Tube Length	90 mm	90 mm
L Reach	415 mm	375 mm
M Stack	545 mm	513 mm

Fotogalerie

