

SUPERFOXY R (SPE), FROST GREEN/BLACK/ÖHLINS YELLOW, 2022

obj. č.: 010.22076SPE



Doporučená cena

132.599 Kč

Pokud chcete kolo Mondraker super enduro se všemi funkcemi, které potřebujete, abyste si každou jízdu užili naplno, ale karbonový rám není na vrcholu vašeho seznamu priorit, je Superfoxy R to pravé kolo pro vás. Opět jsou zde ty nejlepší komponenty, počínaje odpružením Öhlins, komponenty ONOFF a jeho zakázkovými 29" koly Mavic Deemax ... a co je nejlepší, jeho velkolepý rám je vytvořen z nejlepšího hliníku STEATH ALLOY, který umíme v současné době vyrobit. Velkolepý design, krásné barvy a vše navrženo tak, abyste se dostali na hranici svých možností a nic vás nebrzdilo.

Technické specifikace

vyráběné velikosti

S: 380mm / M: 420mm / L: 470mm / XL: 510mm

hmotnost

16,3 Kg

rám

SuperFoxy 29 6061 Alloy Stealth Evo, hydroformed tubing, Zero Suspension System, 160mm travel, Forward Geometry, one piece Monoblock upper link, SuperBoost 12x157mm rear axle, tapered head tube, 73mm BSA bottom bracket, dedicated 1x drivetrain design, telescopic seatpost internal routing, Max. capacity sealed bearings, ISCG 05

vidlice

Öhlins RXF 38 M.2 29, 170mm, TTX18 Twin Tube cartridge, tapered steerer tube, Boost 15x110mm axle, offset 44mm. Settings: high speed compression lever with climb mode, low-speed compression, rebound, air preload, ramp chamber

hlavové složení

Onoff Saturn tapered for 1-1/8" to 1-1/2" head tube, ACB sealed bearings, top 41x30.2x7x45°x45°, bottom 51.9x40x8x45°x45°

přehazovačka

Sram NX Eagle, Type 3 roller bearing clutch, cage lock, long cage, 1x12s, X-actuation 1:1

řazení

Sram Trigger SX Eagle, 12s, X-Actuation 1:1

brzdové páčky

Sram G2 RS, SwingLink, tool-free reach adjust

kliky

Truvativ Descendant 7K Eagle, SuperBoost, DUB axle, Direct mount chain ring, S/M size: 170mm, L/XL size: 175mm

středové složení

Sram DUB BSA, sealed bearings, 73mm

řídítka

Onoff Sulfur 1.0 double butted 6061 alloy, rise: 20mm, width: 800mm, 9° backsweep, 5° upsweep, 31.8mm barbore

představec

Onoff Sulfur FG 30mm 0°, 6061 forged alloy, 31.8mm barbore

sedlovka


Onoff Pija dropper internal, diameter 31.6mm, S size: 337x100mm, M size 387x125mm, L size: 425x150mm, XL size: 465x170mm

sedlo

SDG BEL-AIR 3.0, LPU foam, steel rails

náboj přední Mavic, Boost 15x110mm, IS 6 bolts	náboj zadní Mavic, SuperBoost 12x157mm, ID360 Ratched system, IS 6 bolts
řetěz Sram SX Eagle, 12s, Powerlock	dráty Mavic J-bend duble butted
ráfky Mavic Custom Deemax 29, 28mm internal width, Maxtal welded rim, tubeless ready, 28 spokes	pláště Maxxis Assegai 29x2.5WT, tubeless ready, 3C MAXX GRIP compound, DH casing, 60x2TPI, folding bead,Maxxis Dissector 29x2.4WT, tubeless ready, 3C MAXX GRIP compound, DH casing, 60x2TPI, folding bead
a151 010.22076SPE	obj.c. 010.22076SPE
gripy Onoff Diamond, 1lock-on, 135mm	tlumič Öhlins TTX Air 205X65mm. Settings: high speed compression lever with climb mode, low-speed compression, rebound, air preload. Trunnion top mount, 22.2x10mm bottom bushings
přední brzda Sram G2 RS, 4-piston caliper, Centerline 200mm IS 6 bolts one-piece rotor, steel-backed organic pads	zadní brzda Sram G2 RS, 4-piston caliper, Centerline 200mm IS 6 bolts one-piece rotor, steel-backed organic pads
nastavení tlumiče C20 compression, R35 rebound	převodník 32T, CNC-machined alloy, X-SYNC 2
patka k přehazovačce Mondraker M068	

Geometrie

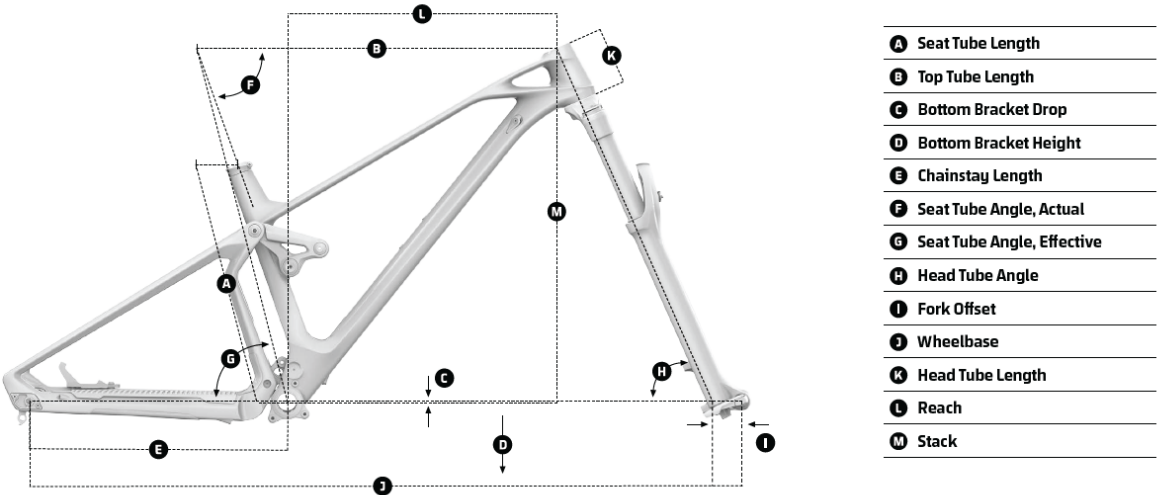

SUPER ENDURO
SUPERFOXY

Size	S	M	L	XL
A Seat Tube Length	380 mm	420 mm	470 mm	510 mm
B Top Tube Length	605 mm	625 mm	650 mm	670 mm
C Bottom Bracket Drop	-20 mm	-20 mm	-20 mm	-20
D Bottom Bracket Height	350 mm	350 mm	350 mm	350 mm
E Chainstay Legth	445 mm	445 mm	445 mm	445 mm
F Seat Tube Angle, Actual	71°	71°	71°	71°
G Seat Tube Angle, Effective	76°	76°	76°	76°
H Head Tube Angle	65°	65°	65°	65°
I Fork Offset	44 mm	44 mm	44 mm	44 mm
J Wheelbase	1224 mm	1245 mm	1273 mm	1293 mm
K Head Tube Length	100 mm	110 mm	130 mm	130 mm
L Reach	450 mm	470 mm	490 mm	510 mm
M Stack	621 mm	621 mm	639 mm	639 mm

Fotogalerie

