

# SUPERFOXY R (SPE), FROST GREEN/BLACK/ÖHLINS YELLOW, 2022

obj. č.: 010.22076SPE



Doporučená cena

**132.599 Kč**

Akční cena

**85.999 Kč**

Pokud chcete kolo Mondraker super enduro se všemi funkcemi, které potřebujete, abyste si každou jízdu užili naplno, ale karbonový rám není na vrcholu vašeho seznamu priorit, je Superfoxy R to pravé kolo pro vás. Opět jsou zde ty nejlepší komponenty, počínaje odpružením Öhlins, komponenty ONOFF a jeho zakázkovými 29" koly Mavic Deemax ... a co je nejlepší, jeho velkolepý rám je vytvořen z nejlepšího hliníku STEATH ALLOY, který umíme v současné době vyrobit. Velkolepý design, krásné barvy a vše navrženo tak, abyste se dostali na hranici svých možností a nic vás nebrzdilo.

## Technické specifikace

### vyráběné velikosti

S: 380mm / M: 420mm / L: 470mm / XL: 510mm

### hmotnost

16,3 Kg

### rám

SuperFoxy 29 6061 Alloy Stealth Evo, hydroformed tubing, Zero Suspension System, 160mm travel, Forward Geometry, one piece Monoblock upper link, SuperBoost 12x157mm rear axle, tapered head tube, 73mm BSA bottom bracket, dedicated 1x drivetrain design, telescopic seatpost internal routing, Max. capacity sealed bearings, ISCG 05

### vidlice

Öhlins RXF 38 M.2 29, 170mm, TTX18 Twin Tube cartridge, tapered steerer tube, Boost 15x110mm axle, offset 44mm. Settings: high speed compression lever with climb mode, low-speed compression, rebound, air preload, ramp chamber

### hlavové složení

Onoff Saturn tapered for 1-1/8" to 1-1/2" head tube, ACB sealed bearings, top 41x30.2x7x45°x45°, bottom 51.9x40x8x45°x45°

### přehazovačka

Sram NX Eagle, Type 3 roller bearing clutch, cage lock, long cage, 1x12s, X-actuation 1:1

### řazení

Sram Trigger SX Eagle, 12s, X-Actuation 1:1

### brzdové páčky

Sram G2 RS, SwingLink, tool-free reach adjust

### kliky

Truvativ Descendant 7K Eagle, SuperBoost, DUB axle, Direct mount chain ring, S/M size: 170mm, L/XL size: 175mm

### středové složení

Sram DUB BSA, sealed bearings, 73mm

### řídítka

Onoff Sulfur 1.0 double butted 6061 alloy, rise: 20mm, width: 800mm, 9° backsweep, 5° upsweep, 31.8mm barbore

### představec

Onoff Sulfur FG 30mm 0°, 6061 forged alloy, 31.8mm barbore

### sedlovka


Onoff Pija dropper internal, diameter 31.6mm, S size: 337x100mm, M size 387x125mm, L size: 425x150mm, XL size: 465x170mm

### sedlo

SDG BEL-AIR 3.0, LPU foam, steel rails

|                                                                                                                             |                                                                                                                                                                                                                      |
|-----------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>náboj přední</b><br>Mavic, Boost 15x110mm, IS 6 bolts                                                                    | <b>náboj zadní</b><br>Mavic, SuperBoost 12x157mm, ID360 Ratched system, IS 6 bolts                                                                                                                                   |
| <b>řetěz</b><br>Sram SX Eagle, 12s, Powerlock                                                                               | <b>dráty</b><br>Mavic J-bend duble butted                                                                                                                                                                            |
| <b>ráfky</b><br>Mavic Custom Deemax 29, 28mm internal width, Maxtal welded rim, tubeless ready, 28 spokes                   | <b>pláště</b><br>Maxxis Assegai 29x2.5WT, tubeless ready, 3C MAXX GRIP compound, DH casing, 60x2TPI, folding bead,Maxxis Dissector 29x2.4WT, tubeless ready, 3C MAXX GRIP compound, DH casing, 60x2TPI, folding bead |
| <b>a151</b><br>010.22076SPE                                                                                                 | <b>obj.c.</b><br>010.22076SPE                                                                                                                                                                                        |
| <b>gripy</b><br>Onoff Diamond, 1lock-on, 135mm                                                                              | <b>tlumič</b><br>Öhlins TTX Air 205X65mm. Settings: high speed compression lever with climb mode, low-speed compression, rebound, air preload. Trunnion top mount, 22.2x10mm bottom bushings                         |
| <b>přední brzda</b><br>Sram G2 RS, 4-piston caliper, Centerline 200mm IS 6 bolts one-piece rotor, steel-backed organic pads | <b>zadní brzda</b><br>Sram G2 RS, 4-piston caliper, Centerline 200mm IS 6 bolts one-piece rotor, steel-backed organic pads                                                                                           |
| <b>nastavení tlumiče</b><br>C20 compression, R35 rebound                                                                    | <b>převodník</b><br>32T, CNC-machined alloy, X-SYNC 2                                                                                                                                                                |
| <b>patka k přehazovačce</b><br>Mondraker M068                                                                               |                                                                                                                                                                                                                      |

Geometrie

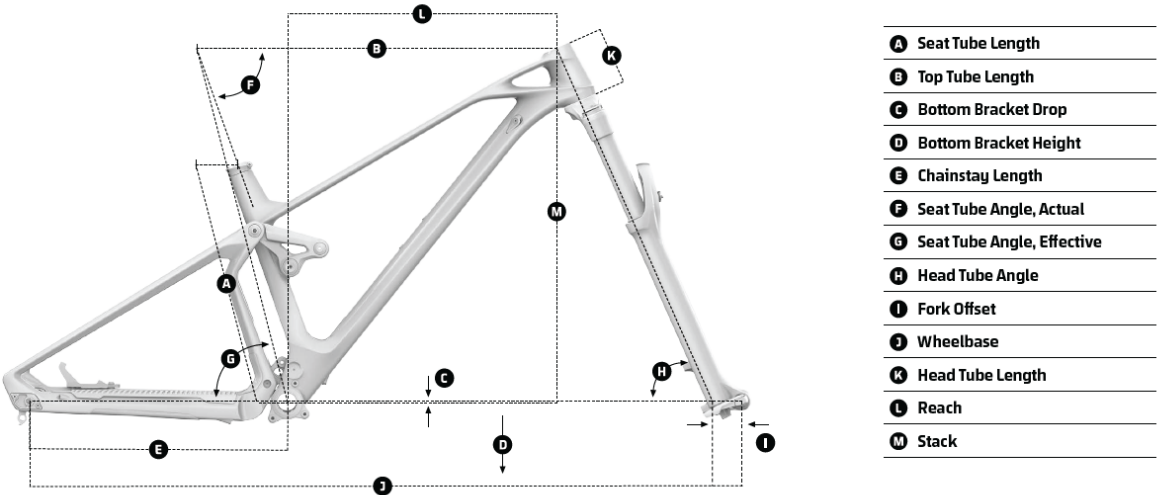

SUPER ENDURO  
SUPERFOXY

| Size                         | S       | M       | L       | XL      |
|------------------------------|---------|---------|---------|---------|
| A Seat Tube Length           | 380 mm  | 420 mm  | 470 mm  | 510 mm  |
| B Top Tube Length            | 605 mm  | 625 mm  | 650 mm  | 670 mm  |
| C Bottom Bracket Drop        | -20 mm  | -20 mm  | -20 mm  | -20     |
| D Bottom Bracket Height      | 350 mm  | 350 mm  | 350 mm  | 350 mm  |
| E Chainstay Legth            | 445 mm  | 445 mm  | 445 mm  | 445 mm  |
| F Seat Tube Angle, Actual    | 71°     | 71°     | 71°     | 71°     |
| G Seat Tube Angle, Effective | 76°     | 76°     | 76°     | 76°     |
| H Head Tube Angle            | 65°     | 65°     | 65°     | 65°     |
| I Fork Offset                | 44 mm   | 44 mm   | 44 mm   | 44 mm   |
| J Wheelbase                  | 1224 mm | 1245 mm | 1273 mm | 1293 mm |
| K Head Tube Length           | 100 mm  | 110 mm  | 130 mm  | 130 mm  |
| L Reach                      | 450 mm  | 470 mm  | 490 mm  | 510 mm  |
| M Stack                      | 621 mm  | 621 mm  | 639 mm  | 639 mm  |

Fotogalerie

