

CHRONO CARBON, CARBON/ORANGE/GREY, 2021

obj. č: 010.21013

Doporučená cena

54.599 Kč

Akční cena

49.399 Kč



Technické specifikace

barva rámečku carbon/orange/grey	vyráběné velikosti S 395mm / M 430mm / L 470mm / XL 520mm
hmotnost 11,3 Kg	rám Chrono 29 Stealth full Carbon, XC Forward Geometry, 73mm BSA bottom bracket, tapered head tube, HHG Internal Cable routing, Boost 12x148mm rear axle, Comfort Flat chainstays (Flatstays) design
vidlice RockShox Judy Gold RL 29, 100mm, Motion control, Solo Air, tapered steerer tube, Boost 15x110mm axle, 30mm aluminum stanchions, offset 51mm. Settings: Onelock 2 pos remote compression (open/lock), rebound, air preload	hlavové složení Onoff Titan tapered for 1-1/8 to 1-1/2 head tube, ACB sealed bearings, top 41.8x30.5x8x45x45, bottom 51.9x40x8x45x45
přehazovačka Sram NX Eagle, Type 3 roller bearing clutch, cage lock, long cage, 1x12s, X-actuation 1:1	řazení Sram Trigger SX Eagle, 12s, X-Actuation 1:1
brzdové páčky Sram Level, tooled reach adjust, lever pivot bushings	kličky Sram SX Eagle, Boost, DUB axle, Direct Mount chain ring, S size: 170mm, M/L/XL size: 175mm
středové složení Sram DUB BSA, sealed bearings, 73mm	řídítka Onoff Sulfur 0.2, double butted 6061 alloy, rise: 4.8mm, width: 740mm, 9 backsweep, 0 upsweep, 31.8mm barbare Onoff Twin, 1lock-on, 135mm
představec MDK, 6061 T6 Alloy, 31.8mm barbare, rise: +/-5, length: size S: 60mm, size M: 70mm, size L: 80mm, size XL: 90mm	sedlovka Onoff Sulfur 0-R, 6061 T6 Alloy, 3D forged, diameter 27.2mm, length 400mm
sedlo Mondraker XC Series, steel rail	náboj přední Formula DC711, Boost 15x110mm, sealed bearings, IS 6 bolts
náboj zadní Formula MST148S-4SB, Boost 12x148mm, sealed bearings, IS 6 bolts	řetěz Sram SX Eagle, 12s, Powerlock
kazeta Sram PG-1230, 11-50T, 12s	dráty CN round stainless steel
ráfky MDK-XP1 29 TLR, 25mm internal width, tubeless ready, 32 spokes	pláště Maxxis Ikon 29x2.20, 3CMaxx Speed compound, tubeless ready, 120TPI, folding bead
obj.c. 010.21013	přední brzda Sram Level, 2 piece caliper, Centerline 160mm IS 6 bolts one-piece rotor, steel-backed organic pad


zadní brzda
Sram Level, 2 piece caliper, Centerline 160mm IS 6 bolts
one-piece rotor, steel-backed organic pad

převodník
34T, steel, X-Sync 2

omotávka
Maxxis Ikon 29x2.20, 3CMaxx Speed compound, tubeless ready,
120TPI, folding bead

patka k přehazovačce
Mondraker M068

Geometrie

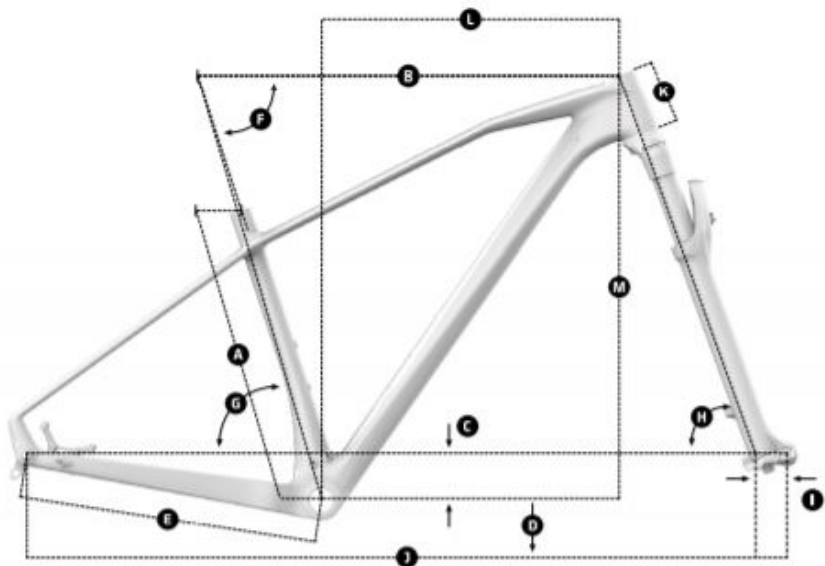

GEOMETRY

Size	S	M	L	XL
A Seat Tube Length	395 mm	430 mm	470 mm	520 mm
B Top Tube Length	590 mm	610 mm	630 mm	650 mm
C Bottom Bracket Drop	-65 mm	-65 mm	-65 mm	-65 mm
D Bottom Bracket Height	305 mm	305 mm	305 mm	305 mm
E Chainstay Legth	430 mm	430 mm	430 mm	430 mm
F Seat Tube Angle, Actual	72°	72°	72°	72°
G Seat Tube Angle, Effective	73.5°	73.5°	73.5°	73.5°
H Head Tube Angle	70°	70°	70°	70°
I Fork Offset	44 mm	44 mm	44 mm	44 mm
J Wheelbase	1086 mm	1106 mm	1127 mm	1148 mm
K Head Tube Length	85 mm	90 mm	100 mm	115 mm
L Reach	411 mm	430 mm	447 mm	463 mm
M Stack	605 mm	610 mm	619 mm	632 mm