

PRIME 29 (SPE), BLACK/RACING SILVER, 2022

obj. č: 010.22174SPE



Doporučená cena

106.999 Kč


Pokud chcete vstoupit do světa lehkých ebiků vybavených těmi nejvýkonnějšími motory, pak je Prime v nabídce Mondraker právě pro vás. Optimalizovaný motor Bosch Performance Line CX Cruise GEN4 nabízí ideální pomoc při šlapání, ať už plánujete jezdit kdekoli. Přizpůsobili jsme naši FORWARD GEOMETRII, abychom vám nabídli neomezené možnosti, jak strávit tolik hodin na kole, kolik chcete. Díky 29" kolům jsou jeho nejvýraznějšími vlastnostmi pohodlí a lehkost, takže si svůj Prime můžete užívat v jakémkoli terénu. Vidlice RockShox Recon Silver RL se zdvihem 120 mm vám zajistí pohodlí a zároveň vám umožní čelit všem výzvám, po kterých vaše srdce touží.

Technické specifikace

vyráběné velikosti XS: 380mm / S: 390mm / M: 430mm / L: 470mm / XL: 510mm	hmotnost 22,2 Kg
rám Prime Xtralite 6061 Full Butted Alloy, Forward Geometry, internal removable battery with integrated alloy cover, tapered head tube, Boost 12x148mm rear axle, integrated dropout speed sensor	vidlice RockShox Recon Silver RL 29, 120mm, Motion control, Solo Air, tapered steerer tube, Boost 15x110mm axle, 42mm offset. Settings: compression adjustment at low-speed to lock, rebound, air preload
hlavové složení Onoff Saturn tapered for 1-1/8" to 1-1/2" head tube, ACB sealed bearings, top 41x30.2x7x45°x45°, bottom 51.9x40x8x45°x45°	přehazovačka Sram SX Eagle, Type 3 roller bearing clutch, cage lock, long cage, 1x12s, X-actuation 1:1
řazení Sram Trigger SX Eagle, 12s, X-Actuation 1:1, single click	brzdové páčky Sram Level TL, Direct Link actuation, tool-free reach adjust, lever pivot bushings
kliky Race Face Aeffect ebike, 165mm	řídítka Onoff Sulfur 1.0 double butted 6061 alloy, rise: 20mm, width: 800mm, 9° backsweep, 5° upsweep, 31.8mm bar bore
představec Onoff Sulfur FG 30mm 0°, 6061 forged alloy, 31.8mm bar bore	sedlovka Onoff Sulfur 0-R, 6061 T6 Alloy, 3D forged, diameter 31.6mm, length 400mm
sedlo FIZIK Terra Aidon X5 145mm	náboj přední Formula DC711, Boost 15x110mm, sealed bearings, IS 6 bolts
náboj zadní Formula EHL148 Boost 12x148mm, sealed bearings, IS 6 bolts	řetěz Sram SX Eagle, 12s, Powerlock
kazeta Sram PG-1210, 11-50T, 12s	dráty CN round stainless steel
ráfky MDK-HP1 29, 30mm internal width, tubeless ready, 32 spokes	pláště Maxxis Rekon 29x2.6, tubeless ready, dual compound, EXO protection, 60TPI, folding bead, Maxxis Rekon 29x2.6, tubeless ready, dual compound, EXO protection, 60TPI, folding bead

a151 010.22174SPE	obj.c. 010.22174SPE
gripy Onoff Diamond, 1lock-on, 135mm	přední brzda Sram Level TL, 2 piece caliper, Centerline 200mm IS 6 bolts one-piece rotor, steel-backed organic pad
zadní brzda Sram Level TL, 2 piece caliper, Centerline 180mm IS 6 bolts one-piece rotor, steel-backed organic pad	převodník Sram X-Sync 2 Eagle 34T, steel, narrow-wide, 104 BCD
patka k přehazovačce Mondraker M068	motor+baterie Bosch Performance Line CX Cruise (25Km/h) GEN4, Bosch Powertube 625Wh, Bosch Purion

Geometrie

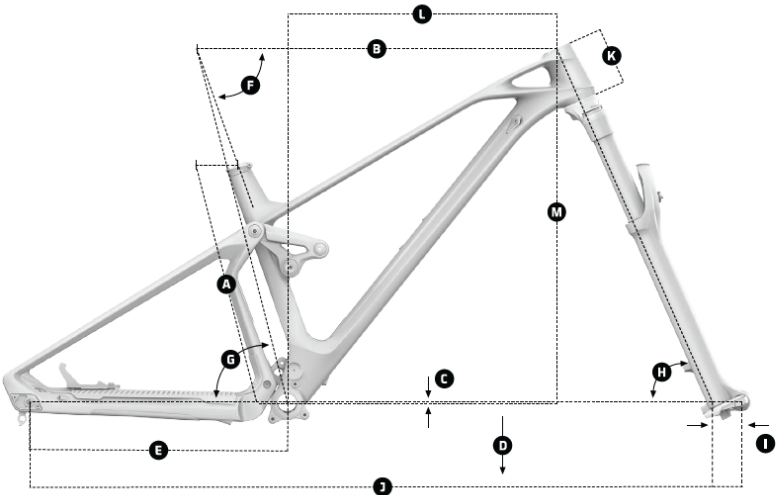

A	Seat Tube Length
B	Top Tube Length
C	Bottom Bracket Drop
D	Bottom Bracket Height
E	Chainstay Length
F	Seat Tube Angle, Actual
G	Seat Tube Angle, Effective
H	Head Tube Angle
I	Fork Offset
J	Wheelbase
K	Head Tube Length
L	Reach
M	Stack

e-MTB TRAIL
PRIME 29

Size	XS	S	M	L	XL
A Seat Tube Length	380 mm	390 mm	430 mm	470 mm	510 mm
B Top Tube Length	600 mm	615 mm	645 mm	670 mm	700 mm
C Bottom Bracket Drop	-60 mm	-60 mm	-60 mm	-60 mm	-60 mm
D Bottom Bracket Height	318 mm	318 mm	318 mm	318 mm	318 mm
E Chainstay Legth	455 mm	455 mm	455 mm	455 mm	455 mm
F Seat Tube Angle, Actual	73.5°	73.5°	73.5°	73.5°	73.5°
G Seat Tube Angle, Effective	73.5°	73.5°	73.5°	73.5°	73.5°
H Head Tube Angle	69°	69°	69°	69°	69°
I Fork Offset	51 mm	51 mm	51 mm	51 mm	51 mm
J Wheelbase	1138mm	1153 mm	1183 mm	1210 mm	1240 mm
K Head Tube Length	110 mm	110 mm	110 mm	130 mm	130 mm
L Reach	410 mm	425 mm	455 mm	480 mm	505 mm
M Stack	640 mm	640 mm	640 mm	658 mm	658 mm

Fotogalerie

