

RAZE CARBON R MIND, CARBON/GLOSS BLACK/RACING SILVER, 2022

obj. č.: 010.22304



Doporučená cena
166.399 Kč

Technické specifikace

vyráběné velikosti S: 380mm / M: 420mm / L: 450mm / XL: 500mm	hmotnost 13,2 Kg
rám New Trail 29 Stealth Air full Carbon, Zero Suspension System, 130mm travel, Forward Geometry, Carbon Monoblock upper link, Boost 12x148mm rear axle, tapered head tube, 73mm BSA bottom bracket, dedicated 1x drivetrain design, HHG internal cable routing, Enduro MAX sealed bearings, shock mudguard, ISCG 05, custom frame protectors.	vidlice Fox 36 29 Float GRIP EVOL Performance, 150mm, tapered steerer tube, Boost 15x110mm axle, 44mm offset. Settings: 3 positions with micro adjust compression, low-speed rebound, air preload
hlavové složení Acros custom for 1-1/2	přehazovačka Sram GX Eagle, Type 3 roller bearing clutch, cage lock, 1x12s, X-Actuation 1:1
řazení Sram Trigger NX Eagle, 12s, X-Actuation 1:1	brzdové páčky Sram G2, SwingLink, tool-free reach adjust
kliky Truvativ Stylo 7k Eagle, Boost, DUB axle, Direct mount chain ring, S/M size: 170mm, L/XL size: 175mm	středové složení Sram DUB BSA, sealed bearings, 73mm
řídítka Onoff Sulfur 1.0 double butted 6061 alloy, rise: 20mm, width: 800mm, 9° backsweep, 5° upsweep, 31.8mm barbare	představec Onoff Sulfur FG 30mm 0°, 6061 forged alloy, 31.8mm barbare
sedlovka Onoff Pija dropper internal, diameter 31.6mm, S size: 387x125mm, M size: 425x150mm, L/XL size: 465x170mm	sedlo Fizik Antares R7
náboj přední DT 350, Boost 15x110mm, IS 6 bolts	náboj zadní DT 350, Boost 12x148mm, 36T SL Ratchet system, IS 6 bolts, XD freehub
řetěz Sram NX Eagle, 12s, Powerlock	kazeta Sram XG-1275, 10-52T, 12s
dráty DT Competition, straightpull	ráfky DT Swiss XM1700 Spline 29, 30mm internal width, welded aluminum, tubeless ready, 28 spokes
pláště Maxxis Aggressor 29x2.3, tubeless ready, dual compound, Exo protection, 60TPI, folding bead, Maxxis Dissector 29x2.4 WT, tubeless ready, 3C MAXX TERRA compound, EXO+ protection, 120TPI, folding bead	a151 010.22304
obj.c. 010.22304	gripy Onoff Diamond, 1lock-on, 135mm

tlumič

Fox Float DPS LV EVOL Performance, 205x57.5mm. Settings: rebound, 3-position compression adjustment (Open/Mid/Lock), air preload. Trunnion top mount, 30x8mm bottom bushings

zadní brzda

Sram G2, 4-piston caliper, Centerline 180mm IS 6 bolts one-piece rotor, steel-backed organic pads

převodník

32T, CNC-machined alloy, X-SYNC 2

přední brzda

Sram G2, 4-piston caliper, Centerline 180mm IS 6 bolts one-piece rotor, steel-backed organic pads


nastavení tlumiče

Light compression, extralight rebound, air volume spacer 0.6

patka k přehazovačce

Sram UDH

Geometrie

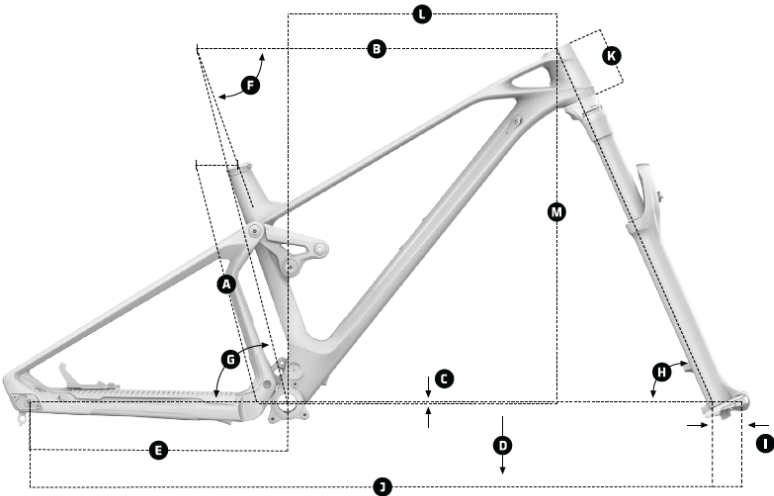

A	Seat Tube Length
B	Top Tube Length
C	Bottom Bracket Drop
D	Bottom Bracket Height
E	Chainstay Length
F	Seat Tube Angle, Actual
G	Seat Tube Angle, Effective
H	Head Tube Angle
I	Fork Offset
J	Wheelbase
K	Head Tube Length
L	Reach
M	Stack

**TRAIL
RAZE**

Size	S	M	L	XL
A Seat Tube Length	375 mm	415 mm	445 mm	500 mm
B Top Tube Length	595 mm	620 mm	645 mm	670 mm
C Bottom Bracket Drop	-30	-30	-30	-30
D Bottom Bracket Height	343 mm	343 mm	343 mm	343 mm
E Chainstay Legth	435 mm	435 mm	435 mm	435 mm
F Seat Tube Angle, Actual	71°	71°	71°	71°
G Seat Tube Angle, Effective	77°	77°	77°	77°
H Head Tube Angle	66°	66°	66°	66°
I Fork Offset	44 mm	44 mm	44 mm	44 mm
J Wheelbase	1193 mm	1217 mm	1243 mm	1269 mm
K Head Tube Length	90 mm	100 mm	115 mm	130 mm
L Reach	450 mm	470 mm	490 mm	510 mm
M Stack	608 mm	617 mm	631 mm	645 mm

Fotogalerie

