

# F-PODIUM CARBON, CARBON/ORANGE/GREY, 2021

obj. č.: 010.21037



Doporučená cena

**116.999 Kč**

## Technické specifikace

|   |  |
|---|--|
| <b>barva rámečku</b><br>carbon/orange/grey  | <b>vyráběné velikosti</b><br>S 390mm / M 420mm / L 470mm / XL 510mm  |
| <b>hmotnost</b><br>10,9 Kg  | <b>rám</b><br>F-Podium 29 Stealth Air Full Carbon, XCO Optimized Zero Suspension System, 100mm, XC Forward Geometry, Carbon Monoblock upper link, BSA bottom bracket, tapered head tube, HHG internal cable routing, dedicated 1X drivetrain design, Boost 12x148mm rear axle, shock mudguard, postmount rear brake mount. |
| <b>vidlice</b><br>Rockshox SID SL Select RL 29, 100mm, Charger, Debonair, tapered steerer tube, Boost 15x110mm axle, 32mm aluminum stanchions, offset 44mm. Settings: OneLock 2 position remote compression (open/lock), low-speed rebound, air preload | <b>hlavové složení</b><br>Acros AZX-239 R1 Block Lock, ZS44/28.6 top, ZS56/40 bottom   |
| <b>přehazovačka</b><br>Sram GX Eagle, Type 3 roller bearing clutch, cage lock, 1x12s, X-Actuation 1:1   | <b>řazení</b><br>Sram Trigger SX Eagle, 12s, X-Actuation 1:1   |
| <b>brzdové páčky</b><br>Sram Level T, Direct Link actuation, tooled reach adjust, lever pivot bushings  | <b>kliky</b><br>Truvativ Stylo 6K Eagle, 12s, Boost, DUB axle, Direct Mount chain ring, S size: 170mm, M/L/XL size: 175mm  |
| <b>středové složení</b><br>Sram DUB BSA, sealed bearings, 73mm  | <b>řídítka</b><br>Onoff Sulfur 0.2, double butted 6061 alloy, rise: 4.8mm, width: 760mm, 9 backsweep, 0 upsweep, 31.8mm barbore Onoff Twin, 1lock-on, 135mm  |
| <b>představec</b><br>MDK, 6061 T6 Alloy, 31.8mm barbore, rise: +/-5, length: sizes S/M: 50mm, size L: 60mm, size XL: 70mm   | <b>sedlovka</b><br>Onoff Sulfur 0-R, 6061 T6 Alloy, 3D forged, diameter 31.6mm, length 400mm   |
| <b>sedlo</b><br>Fizik Antares R7  | <b>náboj přední</b><br>DT 370, Boost 15x110mm, IS 6 bolts  |
| <b>náboj zadní</b><br>DT 370, Boost 12x148mm, 3 Pawl system, IS 6 bolts, MS freehub   | <b>řetěz</b><br>Sram SX Eagle, 12s, Powerlock  |
| <b>kazeta</b><br>Sram PG-1230, 11-50T, 12s  | <b>dráty</b><br>DT Champion, straightpull  |
| <b>ráfky</b><br>DT Swiss X1900 Spline 29, 25mm internal width, sleeved aluminum, tubeless ready, 28 spokes  | <b>pláště</b><br>Maxxis Rekon Race 29x2.25, EXO protection, tubeless ready, 120TPI, folding bead   |

**obj.c.**  
010.21037

**tlumič**  
Rockshox SID Select+ RLR Debonair, 185x47.5mm. Settings: OneLock  
2 position remote compression (open/lock), low-speed rebound, air  
preload. Trunnion top mount, 22.2x10mm bottom bushings

**přední brzda**  
Sram Level T, 2 piece caliper, Centerline 160mm IS 6 bolts  
one-piece rotor, steel-backed organic pad

**zadní brzda**  
Sram Level T, 2 piece caliper, Centerline 160mm IS 6 bolts one-piece  
rotor, steel-backed organic pad


**omotávka**  
Maxxis Rekon Race 29x2.25, EXO protection, tubeless ready,  
120TPI, folding bead

**nastavení tlumiče**  
Light compression, medium rebound, Lockout 430, 1 Token

**převodník**  
34T, steel, X-Sync 2

**patka k přehazovačce**  
Sram UDH

## Geometrie

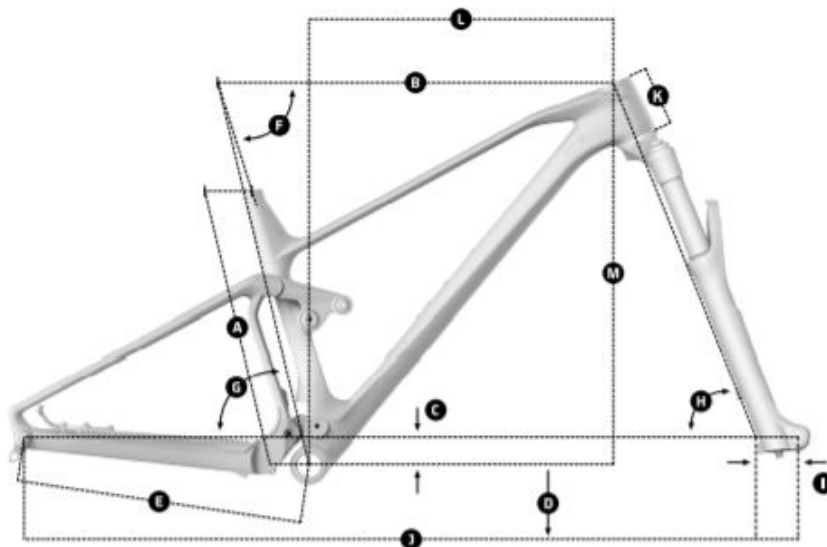

## GEOMETRY

| Size                                | S       | M       | L       | XL      |
|-------------------------------------|---------|---------|---------|---------|
| <b>A</b> Seat Tube Length           | 390 mm  | 420 mm  | 470 mm  | 510 mm  |
| <b>B</b> Top Tube Length            | 580 mm  | 600 mm  | 625 mm  | 650 mm  |
| <b>C</b> Bottom Bracket Drop        | -40 mm  | -40 mm  | -40 mm  | -40 mm  |
| <b>D</b> Bottom Bracket Height      | 325 mm  | 325 mm  | 325 mm  | 325 mm  |
| <b>E</b> Chainstay Legth            | 432 mm  | 432 mm  | 432 mm  | 432 mm  |
| <b>F</b> Seat Tube Angle, Actual    | 72°     | 72°     | 72°     | 72°     |
| <b>G</b> Seat Tube Angle, Effective | 76.5°   | 76.5°   | 76.5°   | 76.5°   |
| <b>H</b> Head Tube Angle            | 68°     | 68°     | 68°     | 68°     |
| <b>I</b> Fork Offset                | 44 mm   | 44 mm   | 44 mm   | 44 mm   |
| <b>J</b> Wheelbase                  | 1132 mm | 1153 mm | 1177 mm | 1203 mm |
| <b>K</b> Head Tube Length           | 85 mm   | 90 mm   | 100 mm  | 115 mm  |
| <b>L</b> Reach                      | 440 mm  | 460 mm  | 480 mm  | 500 mm  |
| <b>M</b> Stack                      | 570 mm  | 575 mm  | 584 mm  | 598 mm  |