

SUPERFOXY CARBON R (SPE), DIRTY WHITE/DEEP PURPLE/FLAME RED, 2022

obj. č.: 010.22114SPE



Doporučená cena

168.999 Kč


Stejně jako je Summum carbon tím nejlehčím kolem na mezinárodním DH okruhu, je i Superfoxy carbon tím nejlehčím super enduro strojem. Díky 170mm zdvihu vpředu a 160mm vzadu poznáte, na jaký typ večírku jste byli pozváni. A co je nejlepší, díky 12rychlostnímu pohonu SRAM můžete vystoupat až na vrchol a začít se sjezdovou zábavou znovu. Lehká a obratná vidlice Fox 38 a tlumič Öhlins TTX Air v kombinaci se zadní stavbou SuperBoost 12x157mm vám poskytnou nebývalou tuhost, díky které budou i ty nejprudší tratě hračkou.

Technické specifikace

vyráběné velikosti S: 380mm / M: 420mm / L: 470mm / XL: 510mm	hmotnost 15,2 Kg
rám SuperFoxy 29 Stealth Air full Carbon, Zero Suspension System, 160mm travel, Forward Geometry, Carbon Monoblock upper link, SuperBoost 12x157mm rear axle, tapered head tube, 73mm BSA bottom bracket, dedicated 1x drivetrain design, HHG internal cable routing, Enduro MAX sealed bearings, shock mudguard, ISCG 05, custom frame protectors. *Optional Geometry kit	vidlice Fox 38 29 Float FIT GRIP EVOL Performance, 170mm, tapered steerer tube, Boost 15x110mm axle, offset 44mm. Settings: 3 positions with micro adjust compression, low-speed rebound, air preload
hlavové složení Onoff Titan tapered for 1-1/8" to 1-1/2" head tube, ACB sealed bearings, top 41.8x30.5x8x45°x45°, bottom 51.9x40x8x45°x45°	přehazovačka Sram GX Eagle, Type 3 roller bearing clutch, cage lock, 1x12s, X-Actuation 1:1
řazení Sram Trigger GX Eagle, 12s, X-Actuation 1:1	brzdové páčky Sram G2 RS, SwingLink, tool-free reach adjust
kliky Truvativ Descendant 7K Eagle, SuperBoost, DUB axle, Direct mount chain ring, S/M size: 170mm, L/XL size: 175mm	středové složení Sram DUB BSA, sealed bearings, 73mm
řídítka Onoff Sulfur 1.0 double butted 6061 alloy, rise: 20mm, width: 800mm, 9° backsweep, 5° upsweep, 31.8mm barbore	představec Onoff Sulfur FG 30mm 0°, 6061 forged alloy, 31.8mm barbore
sedlovka Onoff Pija dropper internal, diameter 31.6mm, S size: 337x100mm, M size 387x125mm, L size: 425x150mm, XL size: 465x170mm	sedlo SDG BEL-AIR 3.0, LPU foam, steel rails
náboj přední DT 370, Boost 15x110mm, CenterLock	náboj zadní DT 370, SuperBoost 12x157mm, 18T Ratched LN system, CenterLock, XD freehub

řetěz Sram NX Eagle, 12s, Powerlock	kazeta Sram XG-1275, 10-52T, 12s
dráty DT Champion, straightpull	ráfky DT Swiss E1900 Spline 29, 30mm internal width, sleeved aluminum, tubeless ready, 28 spokes
pláště Maxxis Assegai 29x2.5WT, tubeless ready, 3C MAXX GRIP compound, DH casing, 60x2TPI, folding bead,Maxxis Dissector 29x2.4WT, tubeless ready, 3C MAXX GRIP compound, DH casing, 60x2TPI, folding bead	a151 010.22114SPE
obj.c. 010.22114SPE	gripy Onoff Diamond, 1lock-on, 135mm
tlumič Öhlins TTX Air 205X65mm. Settings: high speed compression lever with climb mode, low-speed compression, rebound, air preload. Trunnion top mount, 22.2x10mm bottom bushings	přední brzda Sram G2 RS, 4-piston caliper, Centerline 200mm CenterLock rotor, steel-backed organic pads
zadní brzda Sram G2 RS, 4-piston caliper, Centerline 200mm CenterLock rotor, steel-backed organic pads	nastavení tlumiče C20 compression, R35 rebound
převodník 32T, CNC-machined alloy, X-SYNC 2	patka k přehazovačce Mondraker M071
ostatní *Optional geometry kit: 0° headset cups and chainstay adaptor for 450mm CS length	

Geometrie

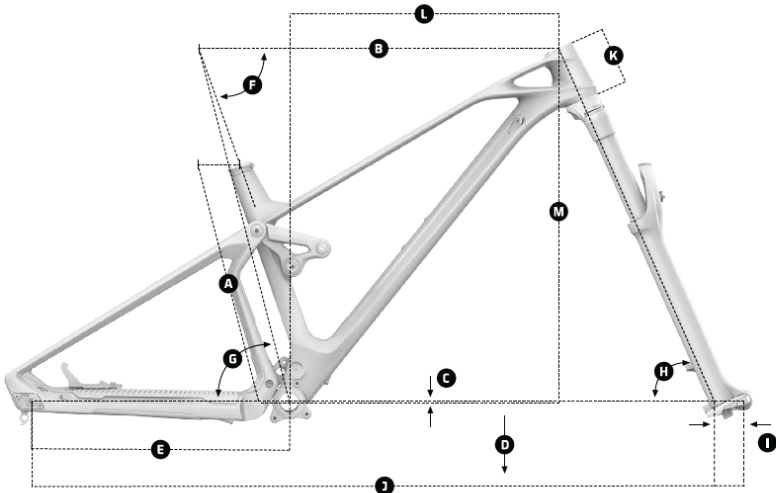

A	Seat Tube Length
B	Top Tube Length
C	Bottom Bracket Drop
D	Bottom Bracket Height
E	Chainstay Length
F	Seat Tube Angle, Actual
G	Seat Tube Angle, Effective
H	Head Tube Angle
I	Fork Offset
J	Wheelbase
K	Head Tube Length
L	Reach
M	Stack

SUPER ENDURO SUPERFOXY CARBON

Size	S	M	L	XL
A Seat Tube Length	380 mm	420 mm	470 mm	510 mm
B Top Tube Length	603 mm	626 mm	651 mm	675 mm
C Bottom Bracket Drop	-14 mm	-14 mm	-14 mm	-14 mm
D Bottom Bracket Height	357 mm	357 mm	357 mm	357 mm
E Chainstay Legth	440 - 450 mm	440 - 450 mm	440 - 450 mm	440 - 450 mm
F Seat Tube Angle, Actual	70.5°	70.5°	70.5°	70.5°
G Seat Tube Angle, Effective	75.5°	75.5°	75.5°	75.5°
H Head Tube Angle	65°	65°	65°	65°
I Fork Offset	44 mm	44 mm	44 mm	44 mm
J Wheelbase	1207 mm	1230 mm	1256 mm	1283 mm
K Head Tube Length	90 mm	100 mm	115 mm	130 mm
L Reach	450 mm	470 mm	490 mm	510 mm
M Stack	605 mm	614 mm	628 mm	642 mm

Fotogalerie

