# PODIUM CARBON R, CARBON/YELLOW/GREEN, 2021

*obj. č: 010.21025*

Doporučená cena
**129.999 Kč**

## Technické specifikace

**barva rámečku**
carbon/yellow/green

**vyráběné velikosti**
S 390mm / M 420mm / L 470mm / XL 510mm

**hmotnost**
8,9 Kg

**rám**
Podium 29 Stealth Air Carbon, XC Forward Geometry, BSA bottom bracket, tapered head tube, HHG internal cable routing, Boost 12x148mm rear axle, dedicated 1X drivetrain design, Flatmount brake compatible,

**vidlice**
Fox 32 29 Float FIT4 EVOL Step Cast Factory Kashima, 100mm, tapered steerer tube,15x110mm Boost axle, remote lockout, offset 44mm. Settings: lockout, compression micro-adjustment at low-speed, rebound, air preload

**hlavové složení**
Onoff Titan tapered for 1-1/8 to 1-1/2 head tube, ACB sealed bearings, top 41.8x30.5x8x45x45, bottom 51.9x40x8x45x45

**přehazovačka**
Shimano XT M8100, SGS, Shadow+, 12s

**řazení**
Shimano SLX M7100, Rapid Fire Plus, 12s

**brzdové páčky**
Shimano XT M8100, ergonomic antiskid lever with servo wave, tool less reach adjust, free stroke adjust

**kliky**
Shimano XT M8100 Boost, Hollowtech II, Q-factor 172mm, S size: 170mm, M/L/XL size: 175mm

**středové složení**
Shimano XT MT800 BSA, 68/73mm

**řidítka**
Onoff Helium Carbon 0.2, rise: 4.8mm, width: 740mm, 9 backsweep, 0 upsweep, 31.8mm barbore Onoff Twin, 1lock-on, 135mm

**představec**
MDK, 6061 T6 Alloy, 31.8mm barbore, rise: +/-5, length: sizes S/M: 60mm, size L: 70mm, size XL: 80mm

**sedlovka**
Onoff Helium Carbon 0-R VFLEX, diameter 27.2mm, length 400mm

**sedlo**
Fizik Antares R7

**náboj přední**
DT 350, Boost 15x110mm, CenterLock

**náboj zadní**
DT 350, Boost 12x148mm, 36T SL Ratchet system, CenterLock, MS freehub

**řetěz**
Shimano Deore M6100, 12s, Quick-link

**kazeta**
Shimano SLX M7100 10-51T Hyperglide+, 12s

**dráty**
DT Competition, straightpull

**ráfky**
DT Swiss XR1700 Spline 29, 25mm internal width, welded aluminum, tubeless ready, 28 spokes

**plášť**
Maxxis Ikon 29x2.20, 3CMaxx Speed compound, tubeless ready, 120TPI, folding bead

**obj.c.**
010.21025

**přední brzda**
Shimano XT M8100, MT800 ICE-Tech 160mm CenterLock rotor, resin pads

| | |
|---|---|
| **zadní brzda**<br>Shimano XT M8110, MT800 ICE-Tech 160mm CenterLock rotor, resin pads, Flatmount | **omotávka**<br>Maxxis Ikon 29x2.20, 3CMaxx Speed compound, tubeless ready, 120TPI, folding bead |
| **převodník**<br>34T, CNC-machined alloy | **patka k přehazovačce**<br>Sram UDH |

## Geometrie

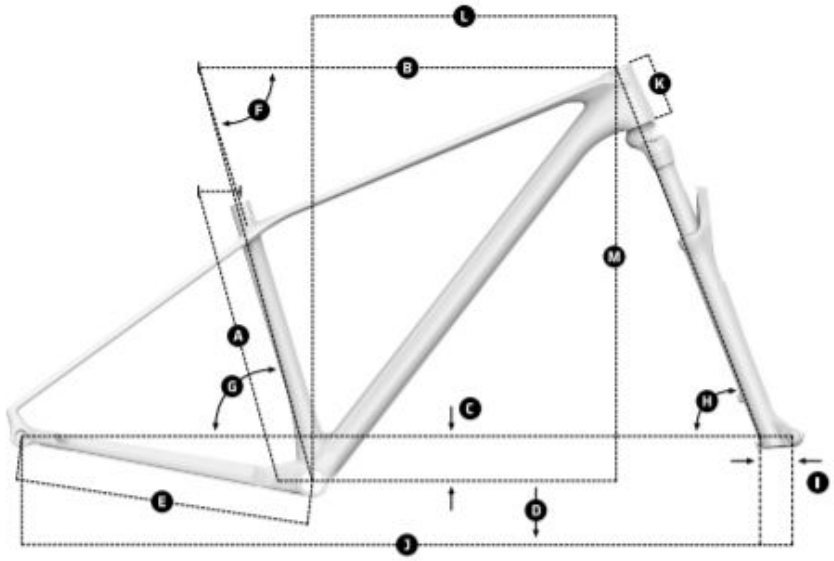


**GEOMETRY**

| Size | S | M | L | XL |
|---|---|---|---|---|
| **A** Seat Tube Length | 390 mm | 420 mm | 470 mm | 510 mm |
| **B** Top Tube Length | 590 mm | 611mm | 632 mm | 650 mm |
| **C** Bottom Bracket Drop | -65 mm | -65 mm | -65 mm | -65 mm |
| **D** Bottom Bracket Height | 305 mm | 305 mm | 305 mm | 305 mm |
| **E** Chainstay Legth | 430 mm | 430 mm | 430 mm | 430 mm |
| **F** Seat Tube Angle, Actual | 73° | 73° | 73° | 73° |
| **G** Seat Tube Angle, Effective | 74.5° | 74.5° | 74.5° | 74.5° |
| **H** Head Tube Angle | 68.5° | 68.5° | 68.5° | 68.5° |
| **I** Fork Offset | 44 mm | 44 mm | 44 mm | 44 mm |
| **J** Wheelbase | 1107 mm | 1128 mm | 1150 mm | 1170 mm |
| **K** Head Tube Length | 85 mm | 90 mm | 100 mm | 115 mm |
| **L** Reach | 425 mm | 444 mm | 463 mm | 477 mm |
| **M** Stack | 598 mm | 602 mm | 611 mm | 625 mm |