

F-PODIUM CARBON DC (SPE), CARBON/CHERRY RED, 2022

obj. č: 010.22052SPE



Doporučená cena

135.199 Kč

Akční cena


93.999 Kč

Technické specifikace

vyráběné velikosti S: 390mm / M: 420mm / L: 470mm / XL: 510mm	hmotnost 12,4 Kg
rám F-Podium 29 Stealth Air Full Carbon, XCO Optimized Zero Suspension System, 115mm, XC Forward Geometry, Carbon Monoblock upper link, BSA bottom bracket, tapered head tube, HHG internal cable routing, dedicated 1X drivetrain design, Boost 12x148mm rear axle, shock mudguard, postmount rear brake mount.	vidlice Fox 34 Step Cast Float Grip Evol Performance, 120mm, tapered steerer tube, 15x110mm Boost axle, offset 44mm. Settings: remote 2pos Push-unlock, rebound, air preload. Fox dual pull
hlavové složení Acros AZX-239 R1 Block Lock, ZS44/28.6 top, ZS56/40 bottom	přehazovačka Sram GX Eagle, Type 3 roller bearing clutch, cage lock, 1x12s, X-Actuation 1:1
řazení Sram Trigger SX Eagle, 12s, X-Actuation 1:1	brzdové páčky Sram Level TL, Direct Link actuation, tooled reach adjust, lever pivot bushings
kliky Truvativ Stylo 6K Eagle, 12s, Boost, DUB axle, Direct Mount chain ring, S size: 170mm, M/L/XL size: 175mm	středové složení Sram DUB BSA, sealed bearings, 73mm
řídítka Onoff Sulfur 0.2, double butted 6061 alloy, rise: 4.8mm, width: 760mm, 9° backsweep, 0° upsweep, 31.8mm barbore	představec MDK, 6061 T6 Alloy, 31.8mm barbore, rise: +/-5°, length: sizes S/M: 50mm, size L: 60mm, size XL: 70mm
sedlovka Onoff Pija dropper internal, diameter 31.6mm, S size: 337x100mm, M/L/XL size 387x125mm	sedlo Fizik Antares R7
náboj přední Mavic, Boost 15x110mm, IS 6 bolts	náboj zadní Mavic, Boost 12x148mm, ID360 Ratched system, IS 6 bolts
řetěz Sram SX Eagle, 12s, Powerlock	kazeta Sram XG-1230, 11-50T, 12s
dráty Mavic straightpull double butted, contactless lacing	ráfky Mavic Crossmax 29, 25mm internal width, welded rim, hookless, tubeless ready, 24 spokes
pláště Maxxis Rekon Race 29x2.4, EXO protection, tubeless ready, 120TPI, folding bead, Maxxis Rekon Race 29x2.4, EXO protection, tubeless ready, 120TPI, folding bead	a151 010.22052SPE

obj.c. 010.22052SPE	gripy Onoff Twin, 1lock-on, 135mm
tlumič Fox Float DPS SV Performance Elite, 185x50mm. Settings: 2 position remote compression (open/lock), low-speed rebound, air preload. Trunnion top mount, 22.2x10mm bottom bushings	přední brzda Sram Level TL, 2 piece caliper, Centerline 180mm IS 6 bolts one-piece rotor, steel-backed organic pad
zadní brzda Sram Level TL, 2 piece caliper, Centerline 160mm IS 6 bolts one-piece rotor, steel-backed organic pad	nastavení tlumiče Firm compression, light rebound, air volume spacer 0.2
převodník 34T, steel, X-Sync 2	patka k přehazovačce Sram UDH

Geometrie

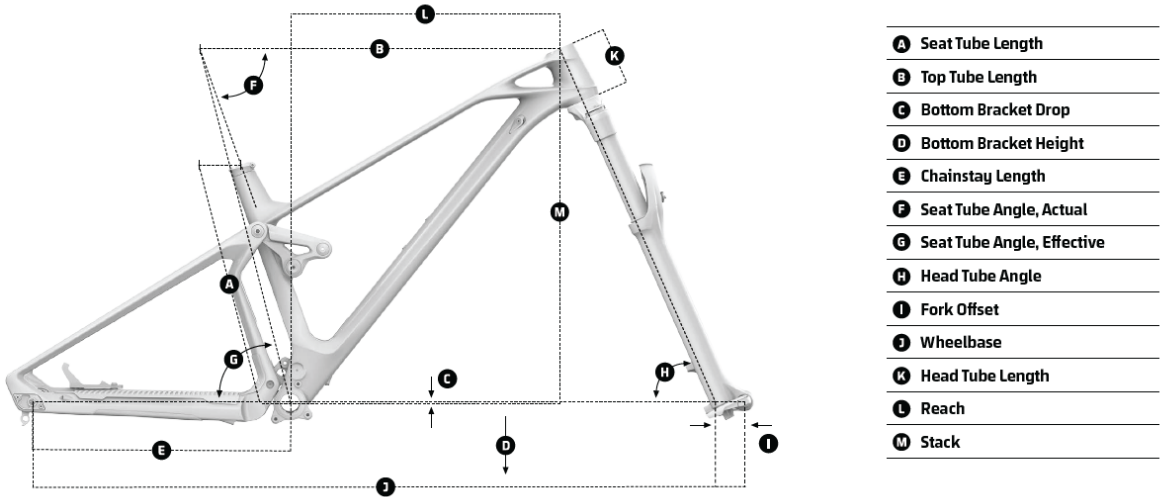

XC RACE
F-PODIUM DC

Size	S	M	L	XL
A Seat Tube Length	390 mm	420 mm	470 mm	510 mm
B Top Tube Length	583 mm	603 mm	629 mm	654 mm
C Bottom Bracket Drop	-31 mm	-31 mm	-31 mm	-31
D Bottom Bracket Height	337 mm	337 mm	337 mm	337 mm
E Chainstay Legth	432 mm	432 mm	432 mm	432 mm
F Seat Tube Angle, Actual	70.8°	70.8°	70.8°	70.8°
G Seat Tube Angle, Effective	75.1°	75.1°	75.1°	75.1°
H Head Tube Angle	66.8°	66.8°	66.8°	66.8°
I Fork Offset	44 mm	44 mm	44 mm	44 mm
J Wheelbase	1146 mm	1167 mm	1191 mm	1217 mm
K Head Tube Length	85 mm	90 mm	100 mm	115 mm
L Reach	430 mm	450 mm	470 mm	490 mm
M Stack	577 mm	582 mm	591 mm	605 mm

Fotogalerie

