

CRAFTY RR (SPE), MARLIN BLUE/RACING SILVER, 2022

obj. č: 010.22232SPE

Doporučená cena
202.799 Kč



Technické specifikace

vyráběné velikosti S: 380mm / M: 420mm / L: 450mm / XL: 490mm	hmotnost 24,9 Kg
rám Crafty 6061 Alloy Stealth Evo, e-Bike Optimized Zero Suspension System, 150mm travel, Forward Geometry, internal non-removable battery, Boost 12x148mm rear axle, tapered head tube, one-piece Monoblock upper link, HHG internal cable routing, MAX capacity sealed bearings, oversize 17mm axles, integrated dropout speed sensor, exclusive plastic motor covers.	vidlice Fox 38 29 Float GRIP2 Factory Kashima, 160mm, e-bike tuned, tapered steerer tube, Boost 15x110mm axle, offset 44mm. Settings: high and low-speed compression, high and low-speed rebound, air preload
hlavové složení Onoff Saturn tapered for 1-1/8" to 1-1/2" head tube, ACB sealed bearings, top 41x30.2x7x45°x45°, bottom 51.9x40x8x45°x45°	přehazovačka Sram GX Eagle, Type 3 roller bearing clutch, cage lock, 1x12s, X-Actuation 1:1
řazení Sram Trigger GX Eagle, 12s, X-Actuation 1:1, single click	brzdové páčky Sram G2 RS, SwingLink and lever pivot bearings, tools-free reach and contact point adjust
kliky Race Face Aeffect ebike, 165mm	řídítka Onoff Sulfur 1.0 double butted 6061 alloy, rise: 20mm, width: 800mm, 9° backsweep, 5° upsweep, 31.8mm barbare
představec Onoff Sulfur FG 30mm 0°, 6061 forged alloy, 31.8mm barbare	sedlovka Fox Transfer Factory Kashima internal, diameter 31.6mm, S size: 363.5x125mm, M/L size: 418.3x150mm, XL size: 475.1x175mm
sedlo FIZIK Terra Aidon X5 145mm	náboj přední Mavic, Boost 15x110mm, IS 6 bolts
náboj zadní Mavic, Boost 12x148mm, ID360 Ratched system, IS 6 bolts	řetěz Sram NX Eagle, 12s, Powerlock
kazeta Sram XG-1230, 11-50T, 12s	dráty Mavic J-bend duble butted, contactless lacing
ráfky Mavic E-Deemax 29, 30mm internal width, welded, PFP, tubeless ready, 28 spokes	pláště Maxxis Minion DHF 29x2.6, tubeless ready, 3C MAXX TERRA, EXO+ Protection, 120TPI, folding bead, Maxxis Minion DHR II 29x2.6, tubeless ready, 3C MAXX TERRA, EXO+ Protection, 120TPI, folding bead
a151 010.22232SPE	obj.c. 010.22232SPE

gripy
Onoff Diamond, 1lock-on, 135mm

přední brzda
Sram G2 RS, 4-piston caliper, Centerline 200mm IS 6 bolts one-piece rotor, steel-backed organic pads

nastavení tlumiče
medium compression, medium rebound, air volume spacer 0.2

patka k přehazovačce
Mondraker M068


tlumič
Fox Float-X LV Factory Kashima, 205x65mm. Settings: compression 2 positions lever, low-speed compression, low-speed rebound, air preload. Trunnion top mount, 25x10mm bottom bushings

zadní brzda
Sram G2 RS, 4-piston caliper, Centerline 200mm IS 6 bolts one-piece rotor, steel-backed organic pads

převodník
Sram X-Sync 2 Eagle 34T, steel, narrow-wide, 104 BCD

motor+baterie
Bosch Performance Line CX Cruise (25Km/h) GEN4 BS3 , Bosch Powertube 750Wh, Bosch Kiox 300

Geometrie

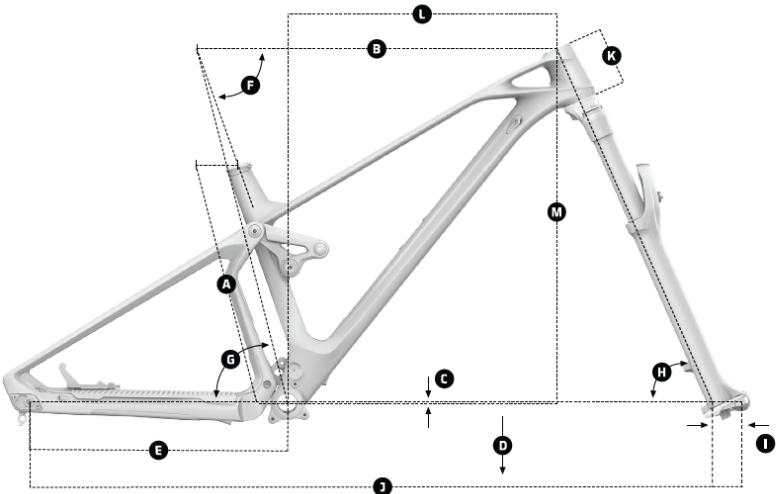

A	Seat Tube Length
B	Top Tube Length
C	Bottom Bracket Drop
D	Bottom Bracket Height
E	Chainstay Length
F	Seat Tube Angle, Actual
G	Seat Tube Angle, Effective
H	Head Tube Angle
I	Fork Offset
J	Wheelbase
K	Head Tube Length
L	Reach
M	Stack

e-MTB ENDURO
CRAFTY

Size	S	M	L	XL
A Seat Tube Length	380 mm	420 mm	450 mm	490 mm
B Top Tube Length	605 mm	625 mm	650 mm	670 mm
C Bottom Bracket Drop	-25 mm	-25 mm	-25 mm	-25 mm
D Bottom Bracket Height	350 mm	350 mm	350 mm	350 mm
E Chainstay Legth	455 mm	455 mm	455 mm	455 mm
F Seat Tube Angle, Actual	73.5°	73.5°	73.5°	73.5°
G Seat Tube Angle, Effective	76°	76°	76°	76°
H Head Tube Angle	65.5°	65.5°	65.5°	65.5°
I Fork Offset	44 mm	44 mm	44 mm	44 mm
J Wheelbase	1225 mm	1245 mm	1265 mm	1285 mm
K Head Tube Length	110 mm	110 mm	130 mm	130 mm
L Reach	450 mm	470 mm	490 mm	510 mm
M Stack	622 mm	622 mm	640 mm	640 mm

Fotogalerie

