

CRAFTY RR (SPE), MARLIN BLUE/RACING SILVER, 2022

obj. č.: 010.22232SPE



Doporučená cena

202.799 Kč

Akční cena

134.999 Kč

Technické specifikace

vyráběné velikosti

S: 380mm / M: 420mm / L: 450mm / XL: 490mm

hmotnost

24,9 Kg

rám

Crafty 6061 Alloy Stealth Evo, e-Bike Optimized Zero Suspension System, 150mm travel, Forward Geometry, internal non-removable battery, Boost 12x148mm rear axle, tapered head tube, one-piece Monoblock upper link, HHG internal cable routing, MAX capacity sealed bearings, oversize 17mm axles, integrated dropout speed sensor, exclusive plastic motor covers.

vidlice

Fox 38 29 Float GRIP2 Factory Kashima, 160mm, e-bike tuned, tapered steerer tube, Boost 15x110mm axle, offset 44mm. Settings: high and low-speed compression, high and low-speed rebound, air preload

hlavové složení

Onoff Saturn tapered for 1-1/8" to 1-1/2" head tube, ACB sealed bearings, top 41x30.2x7x45°x45°, bottom 51.9x40x8x45°x45°

přehazovačka

Sram GX Eagle, Type 3 roller bearing clutch, cage lock, 1x12s, X-Actuation 1:1

řazení

Sram Trigger GX Eagle, 12s, X-Actuation 1:1, single click

brzdové páčky

Sram G2 RS, SwingLink and lever pivot bearings, tools-free reach and contact point adjust

kliky

Race Face Aeffect ebike, 165mm

řídítka

Onoff Sulfur 1.0 double butted 6061 alloy, rise: 20mm, width: 800mm, 9° backsweep, 5° upsweep, 31.8mm barbore

představec

Onoff Sulfur FG 30mm 0°, 6061 forged alloy, 31.8mm barbore

sedlovka

Fox Transfer Factory Kashima internal, diameter 31.6mm, S size: 363.5x125mm, M/L size: 418.3x150mm, XL size: 475.1x175mm

sedlo

FIZIK Terra Aidon X5 145mm

náboj přední

Mavic, Boost 15x110mm, IS 6 bolts

náboj zadní

Mavic, Boost 12x148mm, ID360 Ratched system, IS 6 bolts

řetěz

Sram NX Eagle, 12s, Powerlock

kazeta

Sram XG-1230, 11-50T, 12s

dráty

Mavic J-bend duble butted, contactless lacing

ráfky

Mavic E-Deemax 29, 30mm internal width, welded, PFP, tubeless ready, 28 spokes

pláště

Maxxis Minion DHF 29x2.6, tubeless ready, 3C MAXX TERRA, EXO+ Protection, 120TPI, folding bead, Maxxis Minion DHR II 29x2.6, tubeless ready, 3C MAXX TERRA, EXO+ Protection, 120TPI, folding bead

a151

010.22232SPE

obj.c.

010.22232SPE

gripy
Onoff Diamond, 1lock-on, 135mm

přední brzda
Sram G2 RS, 4-piston caliper, Centerline 200mm IS 6 bolts one-piece rotor, steel-backed organic pads

nastavení tlumiče
medium compression, medium rebound, air volume spacer 0.2

patka k přehazovačce
Mondraker M068


tlumič
Fox Float-X LV Factory Kashima, 205x65mm. Settings: compression 2 positions lever, low-speed compression, low-speed rebound, air preload. Trunnion top mount, 25x10mm bottom bushings

zadní brzda
Sram G2 RS, 4-piston caliper, Centerline 200mm IS 6 bolts one-piece rotor, steel-backed organic pads

převodník
Sram X-Sync 2 Eagle 34T, steel, narrow-wide, 104 BCD

motor+baterie
Bosch Performance Line CX Cruise (25Km/h) GEN4 BS3 , Bosch Powertube 750Wh, Bosch Kiox 300

Geometrie

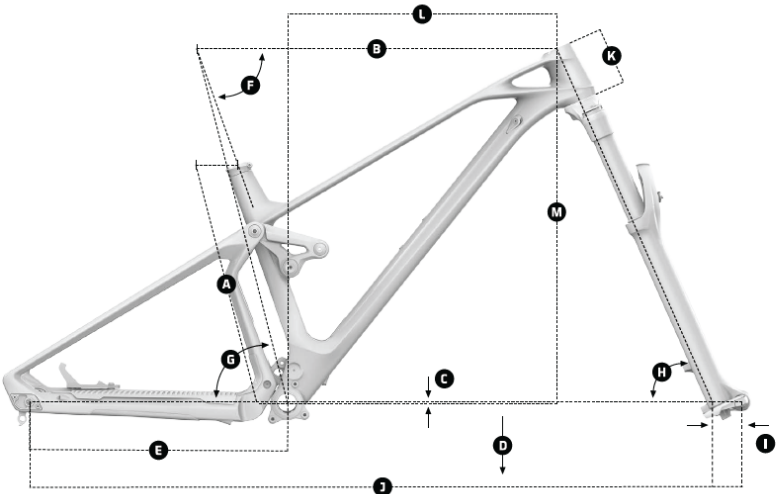

A	Seat Tube Length
B	Top Tube Length
C	Bottom Bracket Drop
D	Bottom Bracket Height
E	Chainstay Length
F	Seat Tube Angle, Actual
G	Seat Tube Angle, Effective
H	Head Tube Angle
I	Fork Offset
J	Wheelbase
K	Head Tube Length
L	Reach
M	Stack

e-MTB ENDURO
CRAFTY

Size	S	M	L	XL
A Seat Tube Length	380 mm	420 mm	450 mm	490 mm
B Top Tube Length	605 mm	625 mm	650 mm	670 mm
C Bottom Bracket Drop	-25 mm	-25 mm	-25 mm	-25 mm
D Bottom Bracket Height	350 mm	350 mm	350 mm	350 mm
E Chainstay Legth	455 mm	455 mm	455 mm	455 mm
F Seat Tube Angle, Actual	73.5°	73.5°	73.5°	73.5°
G Seat Tube Angle, Effective	76°	76°	76°	76°
H Head Tube Angle	65.5°	65.5°	65.5°	65.5°
I Fork Offset	44 mm	44 mm	44 mm	44 mm
J Wheelbase	1225 mm	1245 mm	1265 mm	1285 mm
K Head Tube Length	110 mm	110 mm	130 mm	130 mm
L Reach	450 mm	470 mm	490 mm	510 mm
M Stack	622 mm	622 mm	640 mm	640 mm

Fotogalerie

