

FOXY CARBON XR 29 MIND, BRITISH RACING GREEN/CARBON/ÖHLINS YELLOW, 2022

obj. č.: 010.22324



Doporučená cena

254.799 Kč

Technické specifikace

vyráběné velikosti

S: 380mm / M: 420mm / L: 450mm / XL: 500mm

hmotnost

12,9

rám

Foxy 29 Stealth Air full Carbon, Zero Suspension System, 150mm travel, Forward Geometry, Carbon Monoblock upper link, Boost 12x148mm rear axle, tapered head tube, 73mm BSA bottom bracket, dedicated 1x drivetrain design, HHG internal cable routing, Enduro MAX sealed bearings, shock mudguard, ISCG 05, custom frame protectors. *Geometry kit included

vidlice

Öhlins RXF 36 M.2 29, 170mm, TTX18 Twin Tube cartridge, tapered steerer tube, Boost 15x110mm axle, offset 44mm. Settings: high speed compression lever with climb mode, low-speed compression, rebound, air preload, ramp chamber

hlavové složení

Acros custom for 1-1/2

přehazovačka

Sram X01 Eagle, Type 3 roller bearing clutch, cage lock, 1x12s, X-Actuation 1:1

řazení

Sram Trigger X01 Eagle, 12s, X-Actuation 1:1

brzdové páčky

Sram G2 RSC, SwingLink and lever pivot bearings, tools-free reach and contact point adjust

kličky

Sram X01 Carbon Eagle, Boost, DUB axle, Direct mount chain ring, S/M size: 170mm, L/XL size: 175mm

středové složení

Sram DUB BSA, sealed bearings, 73mm

řídítka

Onoff Krypton Carbon 1.0, rise: 25mm, width: 800mm, 9° backsweep, 5° upsweep, 31.8mm barbore

představec

Onoff Krypton FG 30mm, CNC, 31.8mm barbore

sedlovka

Onoff Pija dropper internal, diameter 31.6mm, S size: 387x125mm, M size: 425x150mm, L/XL size: 465x170mm

sedlo

SDG BEL-AIR 3.0, LPU foam, steel rails

náboj přední

DT 240, Boost 15x110mm, IS 6 bolts

náboj zadní

DT 240, Boost 12x148mm, 36T Ratchet EXP system, IS 6 bolts, XD freehub

řetěz

Sram GX Eagle, 12s, Powerlock

kazeta

Sram XG-1295, 10-52T, 12s

dráty

DT Competition, straightpull

ráfky

DT Swiss EXC1501 Carbon Spline 29, 30mm internal width, hookless, tubeless ready, 28 spokes

pláště

Maxxis Minion DHF 29x2.5 WT, tubeless ready, 3C MAXX TERRA compound, EXO+ protection, 120TPI, folding bead, Maxxis Minion DHR II 29x2.4 WT, tubeless ready, 3C MAXX TERRA compound, EXO+ protection, 120TPI, folding bead

a151

010.22324

obj.c.
010.22324

tlumič
Ůhlinis TTX Air 205x65mm. Settings: high speed compression lever with climb mode, low-speed compression, rebound, air preload. Trunnion top mount, 30x8mm bottom bushings

zadní brzda
Sram G2 RSC, 4-piston caliper, Centerline 180mm IS 6 bolts one-piece rotor, steel-backed organic pads

převodník
32T, CNC-machined alloy, X-SYNC 2

ostatní
*Geometry kit included: steering cups: +/- 1°


gripy
Onoff Diamond, 1lock-on, 135mm

přední brzda
Sram G2 RSC, 4-piston caliper, Centerline 200mm IS 6 bolts one-piece rotor, steel-backed organic pads

nastavení tlumiče
C20 compression, R35 rebound

patka k přehazovačce
Sram UDH

Geometrie

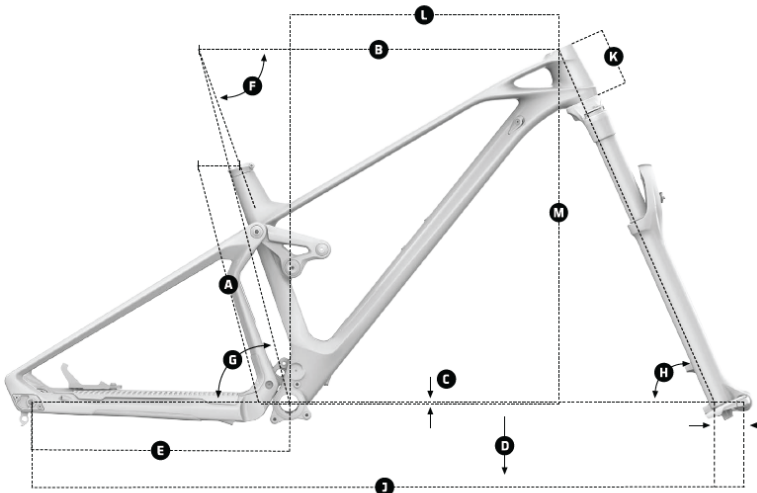

A	Seat Tube Length
B	Top Tube Length
C	Bottom Bracket Drop
D	Bottom Bracket Height
E	Chainstay Length
F	Seat Tube Angle, Actual
G	Seat Tube Angle, Effective
H	Head Tube Angle
I	Fork Offset
J	Wheelbase
K	Head Tube Length
L	Reach
M	Stack

ENDURO
FOXY CARBON XR (STANDARD)

Size	S	M	L	XL
A Seat Tube Length	375 mm	415 mm	445 mm	500 mm
B Top Tube Length	600 mm	620 mm	650 mm	670 mm
C Bottom Bracket Drop	-19	-19	-19	-19
D Bottom Bracket Height	354 mm	354 mm	354 mm	354 mm
E Chainstay Legth	435 mm	435 mm	435 mm	435 mm
F Seat Tube Angle, Actual	70.2°	70.2°	70.2°	70.2°
G Seat Tube Angle, Effective	75.5°	75.5°	75.5°	75.5°
H Head Tube Angle	64.5°	64.5°	64.5°	64.5°
I Fork Offset	44 mm	44 mm	44 mm	44 mm
J Wheelbase	1208 mm	1231 mm	1257 mm	1283 mm
K Head Tube Length	90 mm	100 mm	115 mm	130 mm
L Reach	440 mm	460 mm	480 mm	500 mm
M Stack	617 mm	627 mm	641 mm	655 mm

ENDURO
FOXY CARBON XR (LOW)

Size	S	M	L	XL
A Seat Tube Length	375 mm	415 mm	445 mm	500 mm
B Top Tube Length	600 mm	620 mm	650 mm	670 mm
C Bottom Bracket Drop	-24	-24	-24	-24
D Bottom Bracket Height	349 mm	349 mm	349 mm	349 mm
E Chainstay Legth	445 mm	445 mm	445 mm	445 mm
F Seat Tube Angle, Actual	69.8°	69.8°	69.8°	69.8°
G Seat Tube Angle, Effective	75°	75°	75°	75°
H Head Tube Angle	64°	64°	64°	64°
I Fork Offset	44 mm	44 mm	44 mm	44 mm
J Wheelbase	1213 mm	1238 mm	1264 mm	1290 mm
K Head Tube Length	90 mm	100 mm	115 mm	130 mm
L Reach	436 mm	456 mm	476 mm	496 mm
M Stack	620 mm	630 mm	644 mm	658 mm

Fotogalerie

