

FOXY CARBON XR 29 MIND, BRITISH RACING GREEN/CARBON/ÖHLINS YELLOW, 2022

obj. č.: 010.22324



Doporučená cena

254.799 Kč

Akční cena

152.999 Kč

Technické specifikace

vyráběné velikosti S: 380mm / M: 420mm / L: 450mm / XL: 500mm	hmotnost 12,9
rám Foxy 29 Stealth Air full Carbon, Zero Suspension System, 150mm travel, Forward Geometry, Carbon Monoblock upper link, Boost 12x148mm rear axle, tapered head tube, 73mm BSA bottom bracket, dedicated 1x drivetrain design, HHG internal cable routing, Enduro MAX sealed bearings, shock mudguard, ISCG 05, custom frame protectors. *Geometry kit included	vidlice Öhlins RXF 36 M.2 29, 170mm, TTX18 Twin Tube cartridge, tapered steerer tube, Boost 15x110mm axle, offset 44mm. Settings: high speed compression lever with climb mode, low-speed compression, rebound, air preload, ramp chamber
hlavové složení Acros custom for 1-1/2	přehazovačka Sram X01 Eagle, Type 3 roller bearing clutch, cage lock, 1x12s, X-Actuation 1:1
řazení Sram Trigger X01 Eagle, 12s, X-Actuation 1:1	brzdové páčky Sram G2 RSC, SwingLink and lever pivot bearings, tools-free reach and contact point adjust
kličky Sram X01 Carbon Eagle, Boost, DUB axle, Direct mount chain ring, S/M size: 170mm, L/XL size: 175mm	středové složení Sram DUB BSA, sealed bearings, 73mm
řídítka Onoff Krypton Carbon 1.0, rise: 25mm, width: 800mm, 9° backsweep, 5° upsweep, 31.8mm barbare	představec Onoff Krypton FG 30mm, CNC, 31.8mm barbare
sedlovka Onoff Pija dropper internal, diameter 31.6mm, S size: 387x125mm, M size: 425x150mm, L/XL size: 465x170mm	sedlo SDG BEL-AIR 3.0, LPU foam, steel rails
náboj přední DT 240, Boost 15x110mm, IS 6 bolts	náboj zadní DT 240, Boost 12x148mm, 36T Ratchet EXP system, IS 6 bolts, XD freehub
řetěz Sram GX Eagle, 12s, Powerlock	kazeta Sram XG-1295, 10-52T, 12s
dráty DT Competition, straightpull	ráfky DT Swiss EXC1501 Carbon Spline 29, 30mm internal width, hookless, tubeless ready, 28 spokes

pláště

Maxxis Minion DHF 29x2.5 WT, tubeless ready, 3C MAXX TERRA compound, EXO+ protection, 120TPI, folding bead, Maxxis Minion DHR II 29x2.4 WT, tubeless ready, 3C MAXX TERRA compound, EXO+ protection, 120TPI, folding bead

a151
010.22324

obj.c.
010.22324

gripy
Onoff Diamond, 1lock-on, 135mm

tlumič
Öhlins TTX Air 205x65mm. Settings: high speed compression lever with climb mode, low-speed compression, rebound, air preload. Trunnion top mount, 30x8mm bottom bushings

přední brzda
Sram G2 RSC, 4-piston caliper, Centerline 200mm IS
6 bolts one-piece rotor, steel-backed organic pads

zadní brzda
Sram G2 RSC, 4-piston caliper, Centerline 180mm IS 6 bolts one-piece rotor, steel-backed organic pads


nastavení tlumiče
C20 compression, R35 rebound

převodník
32T, CNC-machined alloy, X-SYNC 2

patka k přehazovačce
Sram UDH

ostatní
*Geometry kit included: steering cups: +/- 1°

Geometrie

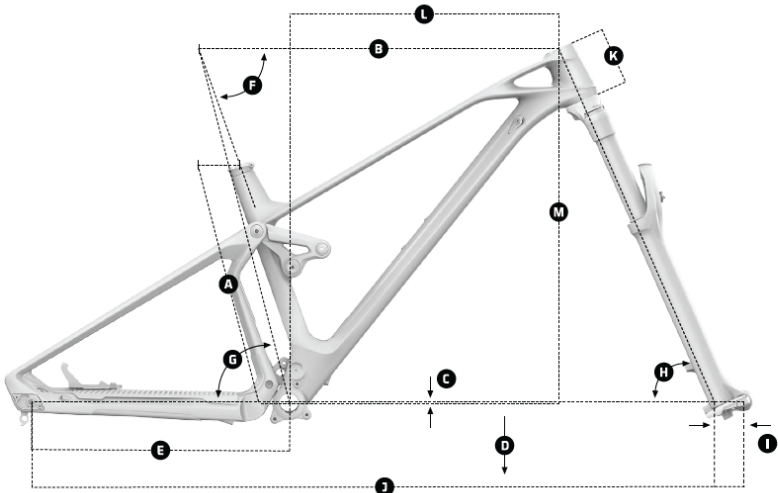

A	Seat Tube Length
B	Top Tube Length
C	Bottom Bracket Drop
D	Bottom Bracket Height
E	Chainstay Length
F	Seat Tube Angle, Actual
G	Seat Tube Angle, Effective
H	Head Tube Angle
I	Fork Offset
J	Wheelbase
K	Head Tube Length
L	Reach
M	Stack

ENDURO
FOXY CARBON XR (STANDARD)

Size	S	M	L	XL
A Seat Tube Length	375 mm	415 mm	445 mm	500 mm
B Top Tube Length	600 mm	620 mm	650 mm	670 mm
C Bottom Bracket Drop	-19	-19	-19	-19
D Bottom Bracket Height	354 mm	354 mm	354 mm	354 mm
E Chainstay Length	435 mm	435 mm	435 mm	435 mm
F Seat Tube Angle, Actual	70.2°	70.2°	70.2°	70.2°
G Seat Tube Angle, Effective	75.5°	75.5°	75.5°	75.5°
H Head Tube Angle	64.5°	64.5°	64.5°	64.5°
I Fork Offset	44 mm	44 mm	44 mm	44 mm
J Wheelbase	1208 mm	1231 mm	1257 mm	1283 mm
K Head Tube Length	90 mm	100 mm	115 mm	130 mm
L Reach	440 mm	460 mm	480 mm	500 mm
M Stack	617 mm	627 mm	641 mm	655 mm

ENDURO
FOXY CARBON XR (LOW)

Size	S	M	L	XL
A Seat Tube Length	375 mm	415 mm	445 mm	500 mm
B Top Tube Length	600 mm	620 mm	650 mm	670 mm
C Bottom Bracket Drop	-24	-24	-24	-24
D Bottom Bracket Height	349 mm	349 mm	349 mm	349 mm
E Chainstay Length	445 mm	445 mm	445 mm	445 mm
F Seat Tube Angle, Actual	69.8°	69.8°	69.8°	69.8°
G Seat Tube Angle, Effective	75°	75°	75°	75°
H Head Tube Angle	64°	64°	64°	64°
I Fork Offset	44 mm	44 mm	44 mm	44 mm
J Wheelbase	1213 mm	1238 mm	1264 mm	1290 mm
K Head Tube Length	90 mm	100 mm	115 mm	130 mm
L Reach	436 mm	456 mm	476 mm	496 mm
M Stack	620 mm	630 mm	644 mm	658 mm

Fotogalerie

