

PRIME R, CHERRY RED/BLACK, 2022

obj. č.: 010.22142



Doporučená cena

119.599 Kč

Akční cena

89.999 Kč

Technické specifikace

vyráběné velikosti

XS: 380mm / S: 390mm / M: 430mm / L: 470mm / XL: 510mm

vidlice

RockShox 35 Silver TK 29, 120mm, TurnKey, Solo Air, tapered steerer tube, Boost 15x110mm axle, 35mm steel stanchions, 44mm offset. Settings: compression adjustment at low-speed to lock, rebound, air preload

přehazovačka

Sram SX Eagle, Type 3 roller bearing clutch, cage lock, long cage, 1x12s, X-actuation 1:1

brzdové páčky

Sram G2 R, tool-free reach adjust

řídítka

Onoff Sulfur 1.0 double butted 6061 alloy, rise: 20mm, width: 800mm, 9° backsweep, 5° upsweep, 31.8mm bar bore

sedlovka

Onoff Pija dropper internal, diameter 31.6mm, S size: 387x125mm, M size: 425x150mm, L/XL size: 465x170mm

náboj přední

Formula DC711, Boost 15x110mm, sealed bearings, IS 6 bolts

řetěz

Sram SX Eagle, 12s, Powerlock

dráty

CN round stainless steel

pláště

Maxxis Rekon 29x2.6, tubeless ready, dual compound, EXO protection, 60TPI, folding bead, Maxxis Rekon 29x2.6, tubeless ready, dual compound, EXO protection, 60TPI, folding bead

obj.c.

010.22142

rám

Prime Xtralite 6061 Full Butted Alloy, Forward Geometry, internal non-removable battery, tapered head tube, Boost 12x148mm rear axle, integrated dropout speed sensor

hlavové složení

Onoff Saturn tapered for 1-1/8" to 1-1/2" head tube, ACB sealed bearings, top 41x30.2x7x45°x45°, bottom 51.9x40x8x45°x45°

řazení

Sram Trigger SX Eagle, 12s, X-Actuation 1:1, single click

kliky

Race Face Aeffect ebike, 165mm

představec

Onoff Saturn tapered for 1-1/8" to 1-1/2" head tube, ACB sealed bearings, top 41x30.2x7x45°x45°, bottom 51.9x40x8x45°x45°

sedlo

FIZIK Terra Aidon X5 145mm

náboj zadní

Formula EHL148 Boost 12x148mm, sealed bearings, IS 6 bolts

kazeta

Sram PG-1210, 11-50T, 12s

ráfky

MDK-HP1 29, 30mm internal width, tubeless ready, 32 spokes

a151

010.22142

gripy

Onoff Diamond, 1lock-on, 135mm

přední brzda
Sram G2 R, 4-piston caliper, Centerline 200mm IS 6 bolts one-piece rotor, steel-backed organic pads


převodník
Sram X-Sync 2 Eagle 34T, steel, narrow-wide, 104 BCD

motor+baterie
Bosch Performance Line CX Cruise (25Km/h) GEN4 BS , Bosch Powertube 750Wh, Bosch Kiox 300

zadní brzda
Sram G2 R, 4-piston caliper, Centerline 200mm IS 6 bolts one-piece rotor, steel-backed organic pads

patka k přehazovačce
Mondraker M068

Geometrie

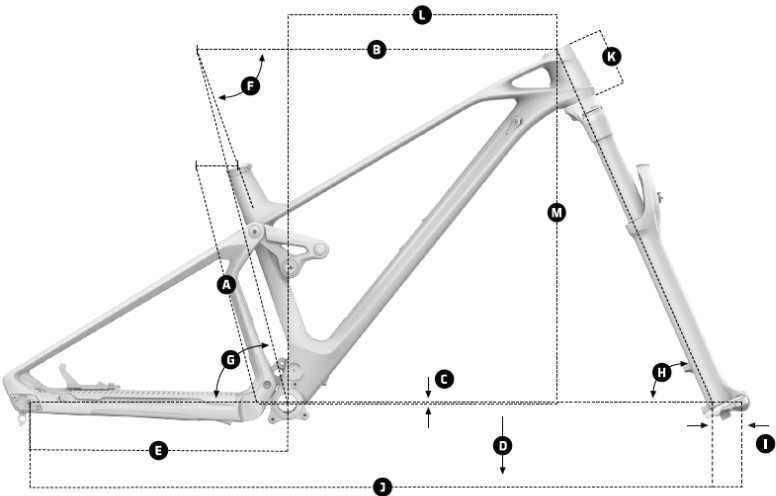

A	Seat Tube Length
B	Top Tube Length
C	Bottom Bracket Drop
D	Bottom Bracket Height
E	Chainstay Length
F	Seat Tube Angle, Actual
G	Seat Tube Angle, Effective
H	Head Tube Angle
I	Fork Offset
J	Wheelbase
K	Head Tube Length
L	Reach
M	Stack

e-MTB TRAIL
PRIME R / PRIME 29

Size	XS	S	M	L	XL
A Seat Tube Length	380 mm	390 mm	430 mm	470 mm	510 mm
B Top Tube Length	600 mm	615 mm	645 mm	670 mm	700 mm
C Bottom Bracket Drop	-60 mm	-60 mm	-60 mm	-60 mm	-60 mm
D Bottom Bracket Height	318 mm	318 mm	318 mm	318 mm	318 mm
E Chainstay Legth	455 mm	455 mm	455 mm	455 mm	455 mm
F Seat Tube Angle, Actual	73.5°	73.5°	73.5°	73.5°	73.5°
G Seat Tube Angle, Effective	73.5°	73.5°	73.5°	73.5°	73.5°
H Head Tube Angle	69°	69°	69°	69°	69°
I Fork Offset	51 mm	51 mm	51 mm	51 mm	51 mm
J Wheelbase	1138mm	1153 mm	1183 mm	1210 mm	1240 mm
K Head Tube Length	110 mm	110 mm	110 mm	130 mm	130 mm
L Reach	410 mm	425 mm	455 mm	480 mm	505 mm
M Stack	640 mm	640 mm	640 mm	658 mm	658 mm

Fotogalerie

