

PRIME R, CHERRY RED/BLACK, 2022

obj. č.: 010.22142



Doporučená cena

119.599 Kč

Technické specifikace


vyráběné velikosti XS: 380mm / S: 390mm / M: 430mm / L: 470mm / XL: 510mm	rám Prime Xtralite 6061 Full Butted Alloy, Forward Geometry, internal non-removable battery, tapered head tube, Boost 12x148mm rear axle, integrated dropout speed sensor
vidlice RockShox 35 Silver TK 29, 120mm, TurnKey, Solo Air, tapered steerer tube, Boost 15x110mm axle, 35mm steel stanchions, 44mm offset. Settings: compression adjustment at low-speed to lock, rebound, air preload	hlavové složení Onoff Saturn tapered for 1-1/8" to 1-1/2" head tube, ACB sealed bearings, top 41x30.2x7x45°x45°, bottom 51.9x40x8x45°x45°
přehazovačka Sram SX Eagle, Type 3 roller bearing clutch, cage lock, long cage, 1x12s, X-actuation 1:1	řazení Sram Trigger SX Eagle, 12s, X-Actuation 1:1, single click
brzdové páčky Sram G2 R, tool-free reach adjust	kliky Race Face Aeffect ebike, 165mm
řídítka Onoff Sulfur 1.0 double butted 6061 alloy, rise: 20mm, width: 800mm, 9° backsweep, 5° upsweep, 31.8mm bar bore	představec Onoff Saturn tapered for 1-1/8" to 1-1/2" head tube, ACB sealed bearings, top 41x30.2x7x45°x45°, bottom 51.9x40x8x45°x45°
sedlovka Onoff Pija dropper internal, diameter 31.6mm, S size: 387x125mm, M size: 425x150mm, L/XL size: 465x170mm	sedlo FIZIK Terra Aidon X5 145mm
náboj přední Formula DC711, Boost 15x110mm, sealed bearings, IS 6 bolts	náboj zadní Formula EHL148 Boost 12x148mm, sealed bearings, IS 6 bolts
řetěz Sram SX Eagle, 12s, Powerlock	kazeta Sram PG-1210, 11-50T, 12s
dráty CN round stainless steel	ráfky MDK-HP1 29, 30mm internal width, tubeless ready, 32 spokes
pláště Maxxis Rekon 29x2.6, tubeless ready, dual compound, EXO protection, 60TPI, folding bead, Maxxis Rekon 29x2.6, tubeless ready, dual compound, EXO protection, 60TPI, folding bead	a151 010.22142
obj.c. 010.22142	gripy Onoff Diamond, 1lock-on, 135mm
přední brzda Sram G2 R, 4-piston caliper, Centerline 200mm IS 6 bolts one-piece rotor, steel-backed organic pads	zadní brzda Sram G2 R, 4-piston caliper, Centerline 200mm IS 6 bolts one-piece rotor, steel-backed organic pads

převodník
Sram X-Sync 2 Eagle 34T, steel, narrow-wide, 104 BCD

patka k přehazovačce
Mondraker M068

motor+baterie
Bosch Performance Line CX Cruise (25Km/h) GEN4 BS , Bosch
Powertube 750Wh, Bosch Kiox 300

Geometrie

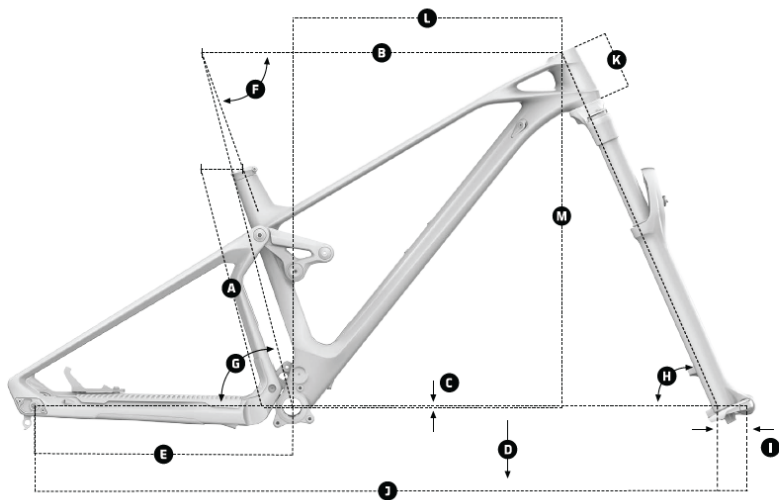

A	Seat Tube Length
B	Top Tube Length
C	Bottom Bracket Drop
D	Bottom Bracket Height
E	Chainstay Length
F	Seat Tube Angle, Actual
G	Seat Tube Angle, Effective
H	Head Tube Angle
I	Fork Offset
J	Wheelbase
K	Head Tube Length
L	Reach
M	Stack

e-MTB TRAIL
PRIME R / PRIME 29

Size	XS	S	M	L	XL
A Seat Tube Length	380 mm	390 mm	430 mm	470 mm	510 mm
B Top Tube Length	600 mm	615 mm	645 mm	670 mm	700 mm
C Bottom Bracket Drop	-60 mm	-60 mm	-60 mm	-60 mm	-60 mm
D Bottom Bracket Height	318 mm	318 mm	318 mm	318 mm	318 mm
E Chainstay Legth	455 mm	455 mm	455 mm	455 mm	455 mm
F Seat Tube Angle, Actual	73.5°	73.5°	73.5°	73.5°	73.5°
G Seat Tube Angle, Effective	73.5°	73.5°	73.5°	73.5°	73.5°
H Head Tube Angle	69°	69°	69°	69°	69°
I Fork Offset	51 mm	51 mm	51 mm	51 mm	51 mm
J Wheelbase	1138mm	1153 mm	1183 mm	1210 mm	1240 mm
K Head Tube Length	110 mm	110 mm	110 mm	130 mm	130 mm
L Reach	410 mm	425 mm	455 mm	480 mm	505 mm
M Stack	640 mm	640 mm	640 mm	658 mm	658 mm

Fotogalerie

