

# PRIME R, CHERRY RED/BLACK, 2022

obj. č.: 010.22142



## Technické specifikace

### vyráběné velikosti

XS: 380mm / S: 390mm / M: 430mm / L: 470mm / XL: 510mm

### rám

Prime Xtralite 6061 Full Butted Alloy, Forward Geometry, internal non-removable battery, tapered head tube, Boost 12x148mm rear axle, integrated dropout speed sensor

### vidlice

RockShox 35 Silver TK 29, 120mm, TurnKey, Solo Air, tapered steerer tube, Boost 15x110mm axle, 35mm steel stanchions, 44mm offset. Settings: compression adjustment at low-speed to lock, rebound, air preload

### hlavové složení

Onoff Saturn tapered for 1-1/8" to 1-1/2" head tube, ACB sealed bearings, top 41x30.2x7x45°x45°, bottom 51.9x40x8x45°x45°

### přehazovačka

Sram SX Eagle, Type 3 roller bearing clutch, cage lock, long cage, 1x12s, X-actuation 1:1

### řazení

Sram Trigger SX Eagle, 12s, X-Actuation 1:1, single click

### brzdové páčky

Sram G2 R, tool-free reach adjust

### kliky

Race Face Aeffect ebike, 165mm

### řídítka

Onoff Sulfur 1.0 double butted 6061 alloy, rise: 20mm, width: 800mm, 9° backsweep, 5° upsweep, 31.8mm bar bore

### představec

Onoff Saturn tapered for 1-1/8" to 1-1/2" head tube, ACB sealed bearings, top 41x30.2x7x45°x45°, bottom 51.9x40x8x45°x45°

### sedlovka

Onoff Pija dropper internal, diameter 31.6mm, S size: 387x125mm, M size: 425x150mm, L/XL size: 465x170mm

### sedlo

FIZIK Terra Aidon X5 145mm

### náboj přední

Formula DC711, Boost 15x110mm, sealed bearings, IS 6 bolts

### náboj zadní

Formula EHL148 Boost 12x148mm, sealed bearings, IS 6 bolts

### řetěz

Sram SX Eagle, 12s, Powerlock

### kazeta

Sram PG-1210, 11-50T, 12s

### dráty

CN round stainless steel

### ráfky

MDK-HP1 29, 30mm internal width, tubeless ready, 32 spokes

### pláště

Maxxis Rekon 29x2.6, tubeless ready, dual compound, EXO protection, 60TPI, folding bead, Maxxis Rekon 29x2.6, tubeless ready, dual compound, EXO protection, 60TPI, folding bead

### a151

010.22142

### obj.c.

010.22142

### gripy

Onoff Diamond, 1lock-on, 135mm

**přední brzda**  
Sram G2 R, 4-piston caliper, Centerline 200mm IS 6 bolts one-piece rotor, steel-backed organic pads


**převodník**  
Sram X-Sync 2 Eagle 34T, steel, narrow-wide, 104 BCD

**motor+baterie**  
Bosch Performance Line CX Cruise (25Km/h) GEN4 BS , Bosch Powertube 750Wh, Bosch Kiox 300

**zadní brzda**  
Sram G2 R, 4-piston caliper, Centerline 200mm IS 6 bolts one-piece rotor, steel-backed organic pads

**patka k přehazovačce**  
Mondraker M068

Geometrie

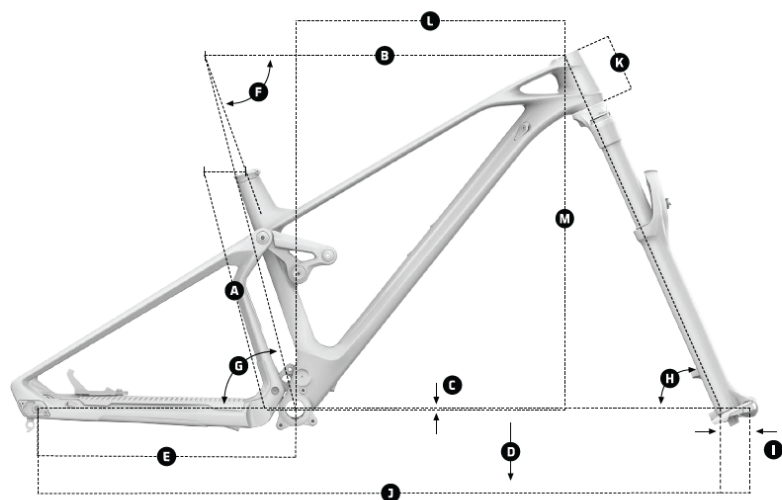

|   |                            |
|---|----------------------------|
| A | Seat Tube Length           |
| B | Top Tube Length            |
| C | Bottom Bracket Drop        |
| D | Bottom Bracket Height      |
| E | Chainstay Length           |
| F | Seat Tube Angle, Actual    |
| G | Seat Tube Angle, Effective |
| H | Head Tube Angle            |
| I | Fork Offset                |
| J | Wheelbase                  |
| K | Head Tube Length           |
| L | Reach                      |
| M | Stack                      |

e-MTB TRAIL  
PRIME R / PRIME 29

| Size                         | XS     | S       | M       | L       | XL      |
|------------------------------|--------|---------|---------|---------|---------|
| A Seat Tube Length           | 380 mm | 390 mm  | 430 mm  | 470 mm  | 510 mm  |
| B Top Tube Length            | 600 mm | 615 mm  | 645 mm  | 670 mm  | 700 mm  |
| C Bottom Bracket Drop        | -60 mm | -60 mm  | -60 mm  | -60 mm  | -60 mm  |
| D Bottom Bracket Height      | 318 mm | 318 mm  | 318 mm  | 318 mm  | 318 mm  |
| E Chainstay Legth            | 455 mm | 455 mm  | 455 mm  | 455 mm  | 455 mm  |
| F Seat Tube Angle, Actual    | 73.5°  | 73.5°   | 73.5°   | 73.5°   | 73.5°   |
| G Seat Tube Angle, Effective | 73.5°  | 73.5°   | 73.5°   | 73.5°   | 73.5°   |
| H Head Tube Angle            | 69°    | 69°     | 69°     | 69°     | 69°     |
| I Fork Offset                | 51 mm  | 51 mm   | 51 mm   | 51 mm   | 51 mm   |
| J Wheelbase                  | 1138mm | 1153 mm | 1183 mm | 1210 mm | 1240 mm |
| K Head Tube Length           | 110 mm | 110 mm  | 110 mm  | 130 mm  | 130 mm  |
| L Reach                      | 410 mm | 425 mm  | 455 mm  | 480 mm  | 505 mm  |
| M Stack                      | 640 mm | 640 mm  | 640 mm  | 658 mm  | 658 mm  |

## Fotogalerie

---

