

RAZE CARBON R, RACING SILVER/ORANGE, 2023

obj. č: 010.23085

Doporučená cena

162.499 Kč

Akční cena

116.999 Kč



Technické specifikace

vyráběné velikosti S: 380mm / M: 420mm / L: 450mm / XL: 500mm	rám Raze 29 Stealth Air full Carbon, Zero Suspension System, 130mm travel, Forward Geometry, Carbon Monoblock upper link, Boost 12x148mm rear axle, tapered head tube, 73mm BSA bottom bracket, dedicated 1x drivetrain design, HHG internal cable routing, Enduro MAX sealed bearings, shock mudguard, ISCG 05, custom frame protectors.
vidlice Fox 36 29 Float GRIP EVOL Performance, 150mm, tapered steerer tube, Boost 15x110mm axle, 44mm offset. Settings: 3 positions with micro adjust compression, low-speed rebound, air preload	hlavové složení Acros custom for 1-1/2
přehazovačka Sram GX Eagle, Type 3 roller bearing clutch, cage lock, 1x12s, X-Actuation 1:1	řazení Sram Trigger NX Eagle, 12s, X-Actuation 1:1
brzdové páčky Sram G2, SwingLink, tool-free reach adjust	kliky Truvativ Stylo 7k Eagle, Boost, DUB axle, Direct mount chain ring, S/M size: 170mm, L/XL size: 175mm
středové složení Sram DUB BSA, sealed bearings, 73mm	řídítka Onoff Sulfur 1.0 double butted 6061 alloy, rise: 20mm, width: 800mm, 9° backsweep, 5° upsweep, 31.8mm barbore
představec Onoff Sulfur FG 30mm 0°, 6061 forged alloy, 31.8mm barbore	sedlovka Onoff Pija dropper internal, diameter 31.6mm, S size: 405x95-125mm, M size 458x120-150mm, L size: 498x140-170mm, XL size: 498x140-170mm
sedlo Fizik Antares R7	náboj přední Infinity hub, Boost 15x110mm, IS 6 bolts
náboj zadní Infinity hub, Boost 15x110mm, IS 6 bolts	řetěz Sram NX Eagle, 12s, Powerlock
kazeta Sram XG-1275, 10-52T, 12s	dráty 24 straight-pull double butted spokes
ráfky Sram G2, SwingLink, tool-free reach adjust	pláště Maxxis Dissector 29x2.4 WT, tubeless ready, 3C MAXX TERRA compound, EXO+ protection, 120TPI, folding bead / Maxxis Aggressor 29x2.3, tubeless ready, dual compound, Exo protection, 60TPI, folding bead
a151 010.23085	obj.c. 010.23085

gripy
Onoff Desert, 1lock-on, 135mm

tlumič
Fox Float DPS LV EVOL Performance, 205x57.5mm. Settings: rebound, 3-position compression adjustment (Open/Mid/Lock), air preload. Trunnion top mount, 30x8mm bottom bushings

přední brzda
Sram G2 R, 4-piston caliper, Centerline 180mm IS 6 bolts one-piece rotor, steel-backed organic pads


zadní brzda
Sram G2 R, 4-piston caliper, Centerline 180mm IS 6 bolts one-piece rotor, steel-backed organic pads

nastavení tlumiče
Light compression, light rebound, air volume spacer 0.6

převodník
32T, CNC-machined alloy, X-SYNC 2

patka k přehazovačce
Sram UDH

Geometrie

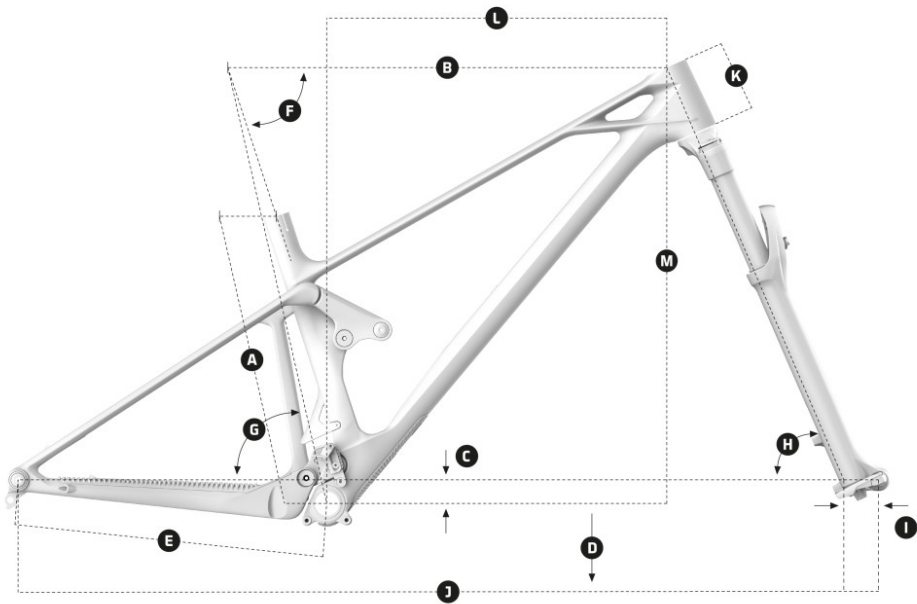

TRAIL RAZE CARBON

Size	S	M	L	XL
A Seat Tube Length	375 mm	415 mm	445 mm	500 mm
B Top Tube Length	595 mm	620 mm	645 mm	670 mm
C Bottom Bracket Drop	-30	-30	-30	-30
D Bottom Bracket Height	343 mm	343 mm	343 mm	343 mm
E Chainstay Legth	435 mm	435 mm	435 mm	435 mm
F Seat Tube Angle, Actual	71°	71°	71°	71°
G Seat Tube Angle, Effective	76.5°	76.5°	76.5°	76.5°
H Head Tube Angle	65.5°	65.5°	65.5°	65.5°
I Fork Offset	44 mm	44 mm	44 mm	44 mm
J Wheelbase	1193 mm	1217 mm	1243 mm	1269 mm
K Head Tube Length	90 mm	100 mm	115 mm	130 mm
L Reach	455 mm	475 mm	495 mm	515 mm
M Stack	608 mm	617 mm	631 mm	645 mm



Fotogalerie

