

RAZE CARBON RR SL MIND, RACING SILVER/BRITISH RACING GREEN, 2023

obj. č.: 010.23093



Technické specifikace

vyroběné velikosti

S: 380mm / M: 420mm / L: 450mm / XL: 500mm

rám

Raze 29 Stealth Air full Carbon, Zero Suspension System, 130mm travel, Forward Geometry, Carbon Monoblock upper link, Boost 12x148mm rear axle, tapered head tube, 73mm BSA bottom bracket, dedicated 1x drivetrain design, HHG internal cable routing, Enduro MAX sealed bearings, shock mudguard, ISCG 05, custom frame protectors. MIND System (EU only)

vidlice

Fox 36 29 Float GRIP2 Factory Kashima, 150mm, tapered steerer tube, Boost 15x110mm axle, 44mm offset. Settings: high and low-speed compression, high and low-speed rebound, air preload

hlavové složení

"Acros custom for 1-1/2"" head tube, angular contact bearings 40x52x7, Internal cable routing"

přehazovačka

Sram XX1 Eagle AXS, Type 2.1 roller bearing clutch, cage lock, long carbon cage, 1x12s, X-actuation 1:1

řazení

Sram Eagle AXS Rocker paddle, 12s

brzdové páčky

Sram G2 RSC, SwingLink, tool-free reach adjust

kliky

Sram XX1 Eagle, Boost, DUB axle, Direct mount chain ring, S/M size: 170mm, L/XL size: 175mm

středové složení

Sram DUB BSA, sealed bearings, 73mm

řídítka

Onoff Krypton Carbon 1.0, rise: 25mm, width: 800mm, 9° backsweep, 5° upsweep, 31.8mm barbore

představec

Onoff Krypton FG 30mm, CNC, 31.8mm barbore

sedlovka

Fox Transfer Factory Kashima internal, diameter 31.6mm, S size: 363.5x125mm, M size: 418.3x150mm, L/XL size: 475.1x175mm

sedlo

Fizik Antares R7

náboj přední

Infinity hub, Boost 15x110mm, IS 6 bolts

náboj zadní

Infinity hub, ID360 freewheel technology, Boost 12x148mm, IS 6 bolts

řetěz

Sram GX Eagle, 12s, Powerlock

kazeta

Sram XG-1295, 10-52T, 12s

dráty

24 straight-pull double butted spokes

ráfky

Mavic CrossMax Carbon XL R, 29 Boost 30mm internal width, hookless, tubeless ready, 24 spokes

pláště

Maxxis Dissector 29x2.4 WT, tubeless ready, 3C MAXX TERRA compound, EXO+ protection, 120TPI, folding bead / Maxxis Aggressor 29x2.3, tubeless ready, dual compound, Exo protection, 60TPI, folding bead

a151

010.23093

obj.c.

010.23093

gripy
Onoff Desert, 1lock-on, 135mm

tlumič
Fox Float DPS Factory Kashima EVOL LV, 205x57.5mm. Settings:
Compression 3 positions lever, low-speed compression, low-speed rebound,
air preload. Trunnion top mount, 30x8mm bottom bushings

přední brzda
Sram G2 RSC, 4-piston caliper, Centerline 180mm IS
6 bolts one-piece rotor, steel-backed organic pads


zadní brzda
Sram G2 RSC, 4-piston caliper, Centerline 180mm IS 6 bolts one-piece rotor,
steel-backed organic pads

nastavení tlumiče
Light compression,light rebound, air volume spacer
0.6

převodník
32T, CNC-machined alloy, X-SYNC 2

patka k přehazovačce
Sram UDH

Geometrie

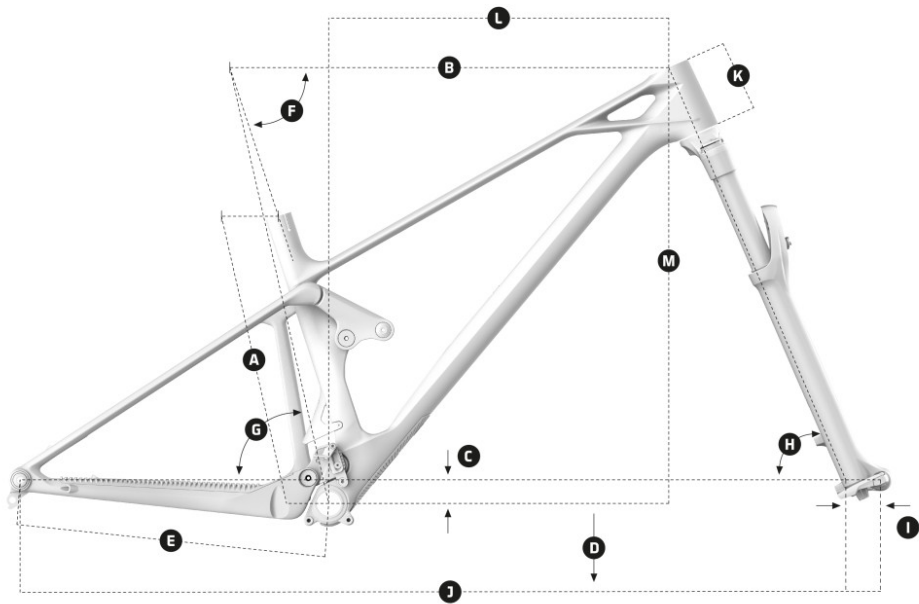

TRAIL
RAZE CARBON

Size	S	M	L	XL
A Seat Tube Length	375 mm	415 mm	445 mm	500 mm
B Top Tube Length	595 mm	620 mm	645 mm	670 mm
C Bottom Bracket Drop	-30	-30	-30	-30
D Bottom Bracket Height	343 mm	343 mm	343 mm	343 mm
E Chainstay Legth	435 mm	435 mm	435 mm	435 mm
F Seat Tube Angle, Actual	71°	71°	71°	71°
G Seat Tube Angle, Effective	76.5°	76.5°	76.5°	76.5°
H Head Tube Angle	65.5°	65.5°	65.5°	65.5°
I Fork Offset	44 mm	44 mm	44 mm	44 mm
J Wheelbase	1193 mm	1217 mm	1243 mm	1269 mm
K Head Tube Length	90 mm	100 mm	115 mm	130 mm
L Reach	455 mm	475 mm	495 mm	515 mm
M Stack	608 mm	617 mm	631 mm	645 mm



Fotogalerie

