

RAZE CARBON RR MIND, RACING SILVER/ÖHLINS YELLOW, 2022

obj. č.: 010.22308



Doporučená cena

194.999 Kč

Technické specifikace

vyráběné velikosti S: 380mm / M: 420mm / L: 450mm / XL: 500mm	rám New Trail 29 Stealth Air full Carbon, Zero Suspension System, 130mm travel, Forward Geometry, Carbon Monoblock upper link, Boost 12x148mm rear axle, tapered head tube, 73mm BSA bottom bracket, dedicated 1x drivetrain design, HHG internal cable routing, Enduro MAX sealed bearings, shock mudguard, ISCG 05, custom frame protectors.
vidlice Fox 36 29 Float GRIP2 Factory Kashima, 150mm, tapered steerer tube, Boost 15x110mm axle, 44mm offset. Settings: 3 positions with micro adjust compression, low-speed rebound, air preload	hlavové složení Acros custom for 1-1/2" head tube, angular contact bearings 40x52x7, Internal cable routing
přehazovačka Sram X01 Eagle, Type 3 roller bearing clutch, cage lock, 1x12s, X-Actuation 1:1	řazení Sram Trigger GX Eagle, 12s, X-Actuation 1:1
brzdové páčky Sram G2 RS, SwingLink, tool-free reach adjust	kliky Sram X1 Carbon Eagle, Boost, DUB axle, Direct mount chain ring, S/M size: 170mm, L/XL size: 175mm
středové složení Sram DUB BSA, sealed bearings, 73mm	řídítka Onoff Krypton Carbon 1.0, rise: 25mm, width: 800mm, 9° backsweep, 5° upsweep, 31.8mm barbare
představec Onoff Krypton FG 30mm, CNC, 31.8mm barbare	sedlovka Fox Transfer Factory Kashima internal, diameter 31.6mm, S size: 363.5x125mm, M size: 418.3x150mm, L/XL size: 475.1x175mm
sedlo Fizik Antares R7	náboj přední DT 350, Boost 15x110mm, IS 6 bolts
náboj zadní Maxxis Dissector 29x2.4 WT, tubeless ready, 3C MAXX TERRA compound, EXO+ protection, 120TPI, folding bead	řetěz Sram GX Eagle, 12s, Powerlock
kazeta Sram XG-1275, 10-52T, 12s	dráty DT Competition, straightpull
ráfky DT Swiss XM1700 Spline 29, 30mm internal width, welded aluminum, tubeless ready, 28 spokes	pláště Maxxis Dissector 29x2.4 WT, tubeless ready, 3C MAXX TERRA compound, EXO+ protection, 120TPI, folding bead, Maxxis Aggressor 29x2.3, tubeless ready, dual compound, Exo protection, 60TPI, folding bead
a151 010.22308	obj.c. 010.22308

gripy
Onoff Diamond, 1lock-on, 135mm

přední brzda
Sram G2 RS, 4-piston caliper, Centerline 180mm IS 6 bolts one-piece rotor, steel-backed organic pads

nastavení tlumiče
Light compression, extralight rebound, air volume spacer 0.6


patka k přehazovačce
Sram UDH

tlumič
Fox Float DPS Factory Kashima evol LV, 205x57.5mm. Settings: Compression 3 positions lever, low-speed compression, low-speed rebound, air preload. Trunnion top mount, 30x8mm bottom bushings

zadní brzda
Sram G2 RS, 4-piston caliper, Centerline 180mm IS 6 bolts one-piece rotor, steel-backed organic pads

převodník
32T, CNC-machined alloy, X-SYNC 2

Geometrie

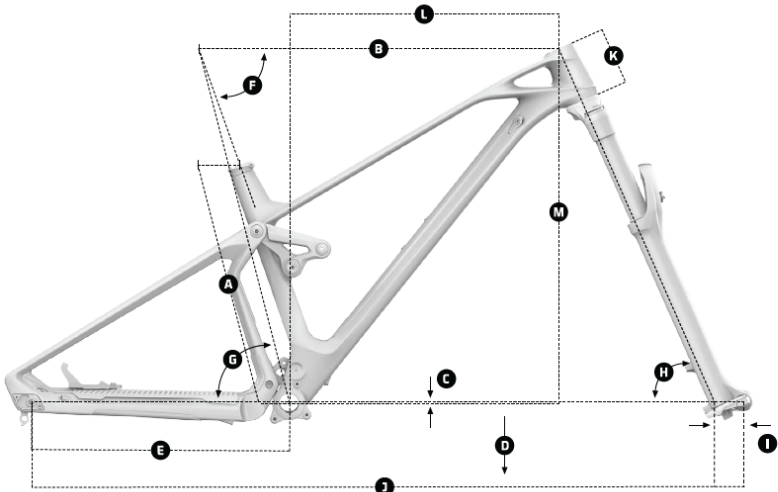

A	Seat Tube Length
B	Top Tube Length
C	Bottom Bracket Drop
D	Bottom Bracket Height
E	Chainstay Length
F	Seat Tube Angle, Actual
G	Seat Tube Angle, Effective
H	Head Tube Angle
I	Fork Offset
J	Wheelbase
K	Head Tube Length
L	Reach
M	Stack

TRAIL
RAZE

Size	S	M	L	XL
A Seat Tube Length	375 mm	415 mm	445 mm	500 mm
B Top Tube Length	595 mm	620 mm	645 mm	670 mm
C Bottom Bracket Drop	-30	-30	-30	-30
D Bottom Bracket Height	343 mm	343 mm	343 mm	343 mm
E Chainstay Legth	435 mm	435 mm	435 mm	435 mm
F Seat Tube Angle, Actual	71°	71°	71°	71°
G Seat Tube Angle, Effective	77°	77°	77°	77°
H Head Tube Angle	66°	66°	66°	66°
I Fork Offset	44 mm	44 mm	44 mm	44 mm
J Wheelbase	1193 mm	1217 mm	1243 mm	1269 mm
K Head Tube Length	90 mm	100 mm	115 mm	130 mm
L Reach	450 mm	470 mm	490 mm	510 mm
M Stack	608 mm	617 mm	631 mm	645 mm

Fotogalerie

