

SUMMUM R 29, DEEP PURPLE/LIGHT BLUE, 2023

obj. č. 010.23161

Doporučená cena

144.999 Kč

Akční cena

101.999 Kč




Technické specifikace

vyráběné velikosti S / M / L / XL	rám Summum 29 6061 Alloy Stealth Evo, hydroformed tubing, Zero suspension system, 200mm travel, Forward Geometry, alloy upper link with shock eyelet bearings, SuperBoost 12x157mm rear axle, 83mm BSA bottom bracket, MAX. capacity dual row Enduro bearings, HHG internal cable routing, ISCG 05. *Optional Geometry kit
vidlice Fox 40 29 Float FIT GRIP EVOL Performance, 203mm, air spring, 1-1/8" steerer tube, 20x110mm axle, offset 56mm. Settings: low-speed compression, low-speed rebound, air preload	hlavové složení Onoff Mercurium 1.5 ZS for 1-1/8" steerer tube, 41x30.15x7x45°x45° ACB sealed bearings, geometry kit cups, external diameter 56mm
přehazovačka Sram GX DH, 7s, medium cage, X-actuation 1:1	přesmykač E.13 Vario Compact Upper Slider ,Alloy backplate ,DMB (Direct mount Bashguard) Lower Slider 34-36t, ISCG 05 adjustable upper slider
řazení Sram trigger GX DH 7s, X-actuation 1:1	brzdové páčky Sram Code R, tool-free reach adjust
kličky Truvativ Descendant DH, DUB axle, Direct mount chain ring, 165mm	středové složení Sram DUB BSA, sealed bearings, 83mm
řídítka Onoff Sulfur 1.0 double butted 6061 alloy, rise: 20mm, width: 800mm, 9° backsweep, 5° upsweep, 31.8mm barbore	představec Onoff Krypton DH CNC Integrated FG, 25-30mm adjustable length, 31.8mm barbore, 6061 alloy, 2x6mm spacer
sedlovka SDG Micro I-Beam SP-751 Alloy, diameter 31.6mm, length 300mm, micro-adjustment	sedlo SDG I-Fly 2.0 I-Beam, high-density PU foam, Cordura sides
náboj přední e*thirteen Boost 20x110mm, triple-sealed, fully machined aluminum, IS 6 bolts	náboj zadní e*thirteen Superboost 12x157mm, triple-sealed, fully machined aluminum w/6-degree engagement, IS 6 bolts
řetěz Sram PC1110 11s, Powerlock	kazeta Sram PG 720 11-25T, 7s
dráty e*thirteen custom Hive triple-buttet black steel, alloy nipples, nipple washers	ráfky "e*thirteen LG1 Plus DH, IW29 29"" Hookless, 6069 Welded Aluminum, 30mm internal width, tubeless ready, 32 spokes"
pláště Michelin DH34 29x2.4, tubeless ready, Magi-X DH compound, double-reinforced DH shield casing, wire bead	a151 010.23161

obj.c. 010.23161	gripy Onoff Desert, 1lock-on, 135mm
tlumič Fox DHX2 Performance Elite, 225x70mm. Settings: low-speed compression, low-speed rebound, spring preload. Trunnion top mount, 30x8mm bottom bushings	přední brzda Sram Code R, oversized 4-piston caliper, Centerline 220mm IS 6 bolts one-piece rotor, steel-backed metal sintered pads
zadní brzda Sram Code R, oversized 4-piston caliper, Centerline 203mm IS 6 bolts one-piece rotor, steel-backed metal sintered pads	nastavení tlumiče ECC010 compression, M rebound. Spring rate: S size 400 lbs, M size 450 lbs, L/XL size 500 lbs
převodník 34T, steel, X-SYNC	patka k přehazovačce Mondraker M068

Geometrie

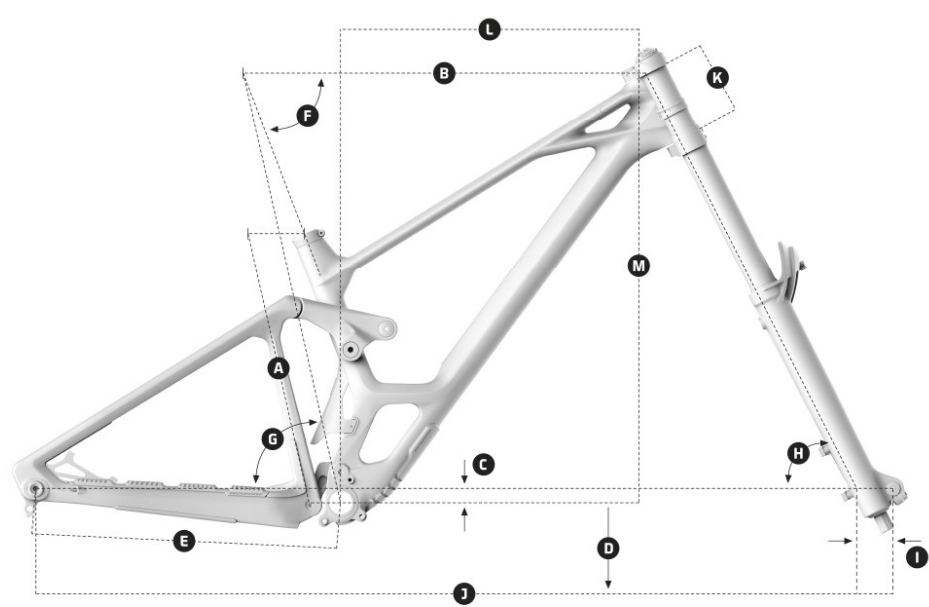

DOWNHILL SUMMUM

Size	S	M	L	XL
A Seat Tube Length	400 mm	400 mm	400 mm	400 mm
B Top Tube Length	573 mm	593 mm	618 mm	643 mm
C Bottom Bracket Drop	-20 mm	-20 mm	-20 mm	-20 mm
D Bottom Bracket Height	350 mm	350 mm	350 mm	350 mm
E Chainstay Legth	450 mm	450 mm	450 mm	450 mm
F Seat Tube Angle, Actual	69°	69°	69°	69°
G Seat Tube Angle, Effective	77°	77°	77°	77°
H Head Tube Angle	63°	63,5°	63,5°	63,5°
I Fork Offset	58 mm	58 mm	58 mm	58 mm
J Wheelbase	1260 mm	1270 mm	1295 mm	1320 mm
K Head Tube Length	112 mm	112 mm	112 mm	112 mm
L Reach	430 mm	450 mm	475 mm	500 mm
M Stack	632 mm	632 mm	632 mm	632 mm

Fotogalerie

