

# PODIUM CARBON RR SL, CARBON/BLEU/BLEU, 2021

obj. č.: 010.21033



## Technické specifikace

<b>barva rámečku</b> carbon/blue/blue	<b>vyráběné velikosti</b> S 390mm / M 420mm / L 470mm / XL 510mm
<b>hmotnost</b> 7,8 Kg	<b>rám</b> Podium 29 Stealth Air Carbon, XC Forward Geometry, BSA bottom bracket, tapered head tube, HHG internal cable routing, Boost 12x148mm rear axle, dedicated 1X drivetrain design, Flatmount brake compatible,
<b>vidlice</b> Rockshox SID SL Ultimate RL 29, 100mm, Charger Race day, Debonair, tapered steerer tube, Boost 15x110mm axle, 32mm aluminum stanchions, offset 44mm. Settings: OneLock 2 position remote compression (open/lock), low-speed rebound, air preload	<b>hlavové složení</b> Onoff Titan tapered for 1-1/8 to 1-1/2 head tube, ACB sealed bearings, top 41.8x30.5x8x45x45, bottom 51.9x40x8x45x45
<b>přehazovačka</b> Sram XX1 Eagle AXS, Type 2.1 roller bearing clutch, cage lock, long carbon cage, 1x12s, X-actuation 1:1	<b>řazení</b> Sram Eagle AXS, 12s
<b>brzdové páčky</b> Sram Level Ultimate, carbon lever, Direct Link actuation, tooled reach adjust, lever pivot bearings, titanium hardware	<b>kliky</b> Sram XX1 Eagle, Boost, DUB axle, Direct mount chain ring, S size: 170mm, M/L/XL size: 175mm
<b>středové složení</b> Sram DUB BSA, sealed bearings, 73mm	<b>řídítka</b> Onoff Helium Carbon 0.2, rise: 4.8mm, width: 740mm, 9 backsweep, 0 upsweep, 31.8mm barbore LIZARD DSP 30.3
<b>představec</b> Onoff Helium 7075 alloy CNC, 31.8mm barbore, rise: +/-5, length: sizes S/M: 60mm, size L: 70mm, size XL: 80mm	<b>sedlovka</b> Onoff Helium Carbon 0-R VFLEX, diameter 27.2mm, length 400mm
<b>sedlo</b> Fizik Antares R7	<b>náboj přední</b> Mavic Boost 15x110mm, IS 6 bolts
<b>náboj zadní</b> Mavic Boost 12x148mm, 24T Ratchet system, IS 6 bolts, XD freehub	<b>řetěz</b> Sram XX1 Eagle, 12s, Powerlock
<b>kazeta</b> Sram XG1299 10-50T, 12s	<b>dráty</b> Mavic ultralight, bladed, straightpull
<b>ráfky</b> Mavic Crossmax SL Ultimate Carbon 29, 25mm internal width, hookless, UST tubeless, 28 spokes	<b>pláště</b> Maxxis Ikon 29x2.20, 3CMaxx Speed compound, tubeless ready, 120TPI, folding bead
<b>obj.c.</b> 010.21033	<b>přední brzda</b> Sram Level Ultimate, 2 piece caliper, Centerline 160mm IS 6 bolts one-piece rotor, steel-backed organic pad, titanium hardware

**zadní brzda**

Sram Level Ultimate, 2 piece caliper, Centerline 160mm IS 6 bolts one-piece rotor, steel-backed organic pad, titanium hardware

**omotávka**

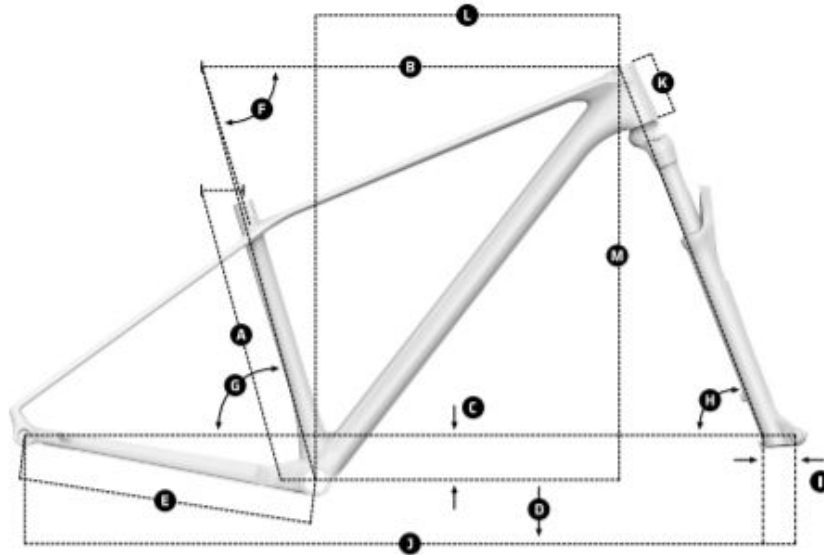
Maxxis Ikon 29x2.20, 3CMaxx Speed compound, tubeless ready, 120TPI, folding bead

**převodník**

34T, CNC-machined alloy, X-SYNC 2

**patka k přehazovačce**

Sram UDH

**Geometrie****GEOMETRY**

Size	S	M	L	XL
<b>A</b> Seat Tube Length	390 mm	420 mm	470 mm	510 mm
<b>B</b> Top Tube Length	590 mm	611mm	632 mm	650 mm
<b>C</b> Bottom Bracket Drop	-65 mm	-65 mm	-65 mm	-65 mm
<b>D</b> Bottom Bracket Height	305 mm	305 mm	305 mm	305 mm
<b>E</b> Chainstay Legth	430 mm	430 mm	430 mm	430 mm
<b>F</b> Seat Tube Angle, Actual	73°	73°	73°	73°
<b>G</b> Seat Tube Angle, Effective	74.5°	74.5°	74.5°	74.5°
<b>H</b> Head Tube Angle	68.5°	68.5°	68.5°	68.5°
<b>I</b> Fork Offset	44 mm	44 mm	44 mm	44 mm
<b>J</b> Wheelbase	1107 mm	1128 mm	1150 mm	1170 mm
<b>K</b> Head Tube Length	85 mm	90 mm	100 mm	115 mm
<b>L</b> Reach	425 mm	444 mm	463 mm	477 mm
<b>M</b> Stack	598 mm	602 mm	611 mm	625 mm