

PODIUM CARBON RR SL, CARBON/BLUE/BLEU, 2021

obj. č.: 010.21033



Doporučená cena

233.999 Kč

Akční cena

233.999 Kč

Technické specifikace

barva rámečku
carbon/blue/blue

vyráběné velikosti
S 390mm / M 420mm / L 470mm / XL 510mm

hmotnost
7,8 Kg

rám
Podium 29 Stealth Air Carbon, XC Forward Geometry, BSA bottom bracket, tapered head tube, HHG internal cable routing, Boost 12x148mm rear axle, dedicated 1X drivetrain design, Flatmount brake compatible,

vidlice
Rockshox SID SL Ultimate RL 29, 100mm, Charger Race day, Debonair, tapered steerer tube, Boost 15x110mm axle, 32mm aluminum stanchions, offset 44mm. Settings: OneLock 2 position remote compression (open/lock), low-speed rebound, air preload

hlavové složení
Onoff Titan tapered for 1-1/8 to 1-1/2 head tube, ACB sealed bearings, top 41.8x30.5x8x45x45, bottom 51.9x40x8x45x45

přehazovačka
Sram XX1 Eagle AXS, Type 2.1 roller bearing clutch, cage lock, long carbon cage, 1x12s, X-actuation 1:1

řazení
Sram Eagle AXS, 12s

brzdové páčky
Sram Level Ultimate, carbon lever, Direct Link actuation, tooled reach adjust, lever pivot bearings, titanium hardware

kličky
Sram XX1 Eagle, Boost, DUB axle, Direct mount chain ring, S size: 170mm, M/L/XL size: 175mm

středové složení
Sram DUB BSA, sealed bearings, 73mm

řídítka
Onoff Helium Carbon 0.2, rise: 4.8mm, width: 740mm, 9 backsweep, 0 upsweep, 31.8mm barbore LIZARD DSP 30.3

představec
Onoff Helium 7075 alloy CNC, 31.8mm barbore, rise: +/-5, length: sizes S/M: 60mm, size L: 70mm, size XL: 80mm

sedlovka
Onoff Helium Carbon 0-R VFLEX, diameter 27.2mm, length 400mm

sedlo
Fizik Antares R7

náboj přední
Mavic Boost 15x110mm, IS 6 bolts

náboj zadní
Mavic Boost 12x148mm, 24T Ratchet system, IS 6 bolts, XD freehub

řetěz
Sram XX1 Eagle, 12s, Powerlock

kazeta
Sram XG1299 10-50T, 12s

dráty
Mavic ultralight, bladed, straightpull

ráfky
Mavic Crossmax SL Ultimate Carbon 29, 25mm internal width, hookless, UST tubeless, 28 spokes

pláště
Maxxis Ikon 29x2.20, 3CMaxx Speed compound, tubeless ready, 120TPI, folding bead

obj.c.
010.21033

přední brzda
Sram Level Ultimate, 2 piece caliper, Centerline 160mm IS 6 bolts one-piece rotor, steel-backed organic pad, titanium hardware

zadní brzda

Sram Level Ultimate, 2 piece caliper, Centerline 160mm IS 6 bolts one-piece rotor, steel-backed organic pad, titanium hardware

omotávka

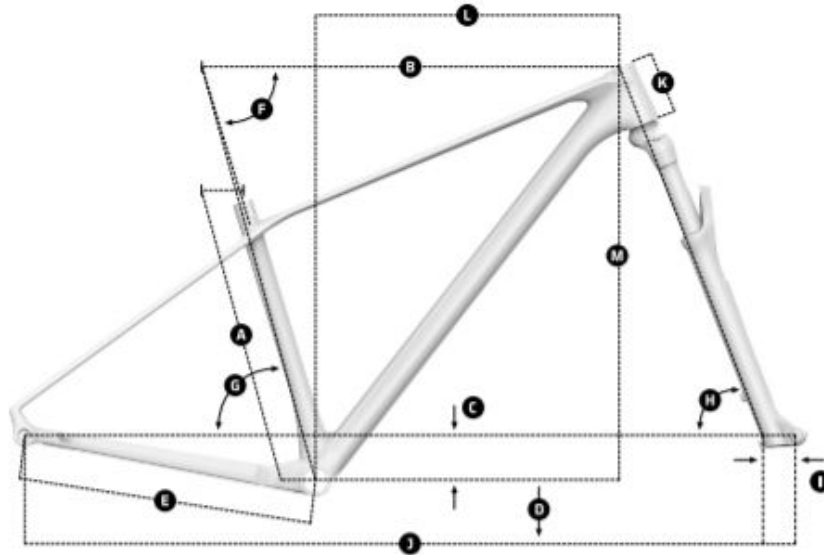
Maxxis Ikon 29x2.20, 3CMaxx Speed compound, tubeless ready, 120TPI, folding bead

převodník

34T, CNC-machined alloy, X-SYNC 2

patka k přehazovačce

Sram UDH

Geometrie**GEOMETRY**

| Size | S | M | L | XL |
|-------------------------------------|---------|---------|---------|---------|
| A Seat Tube Length | 390 mm | 420 mm | 470 mm | 510 mm |
| B Top Tube Length | 590 mm | 611mm | 632 mm | 650 mm |
| C Bottom Bracket Drop | -65 mm | -65 mm | -65 mm | -65 mm |
| D Bottom Bracket Height | 305 mm | 305 mm | 305 mm | 305 mm |
| E Chainstay Legth | 430 mm | 430 mm | 430 mm | 430 mm |
| F Seat Tube Angle, Actual | 73° | 73° | 73° | 73° |
| G Seat Tube Angle, Effective | 74.5° | 74.5° | 74.5° | 74.5° |
| H Head Tube Angle | 68.5° | 68.5° | 68.5° | 68.5° |
| I Fork Offset | 44 mm | 44 mm | 44 mm | 44 mm |
| J Wheelbase | 1107 mm | 1128 mm | 1150 mm | 1170 mm |
| K Head Tube Length | 85 mm | 90 mm | 100 mm | 115 mm |
| L Reach | 425 mm | 444 mm | 463 mm | 477 mm |
| M Stack | 598 mm | 602 mm | 611 mm | 625 mm |