

# PODIUM CARBON RR SL, CARBON/BLEU/BLEU, 2021

obj. č.: 010.21033



Doporučená cena

**233.999 Kč**

Akční cena

**233.999 Kč**

## Technické specifikace

**barva rámečku**  
carbon/blue/blue

**vyráběné velikosti**  
S 390mm / M 420mm / L 470mm / XL 510mm

**hmotnost**  
7,8 Kg

**rám**  
Podium 29 Stealth Air Carbon, XC Forward Geometry, BSA bottom bracket, tapered head tube, HHG internal cable routing, Boost 12x148mm rear axle, dedicated 1X drivetrain design, Flatmount brake compatible,

**vidlice**  
Rockshox SID SL Ultimate RL 29, 100mm, Charger Race day, Debonair, tapered steerer tube, Boost 15x110mm axle, 32mm aluminum stanchions, offset 44mm. Settings: OneLock 2 position remote compression (open/lock), low-speed rebound, air preload

**hlavové složení**  
Onoff Titan tapered for 1-1/8 to 1-1/2 head tube, ACB sealed bearings, top 41.8x30.5x8x45x45, bottom 51.9x40x8x45x45

**přehazovačka**  
Sram XX1 Eagle AXS, Type 2.1 roller bearing clutch, cage lock, long carbon cage, 1x12s, X-actuation 1:1

**řazení**  
Sram Eagle AXS, 12s

**brzdové páčky**  
Sram Level Ultimate, carbon lever, Direct Link actuation, tooled reach adjust, lever pivot bearings, titanium hardware

**kličky**  
Sram XX1 Eagle, Boost, DUB axle, Direct mount chain ring, S size: 170mm, M/L/XL size: 175mm

**středové složení**  
Sram DUB BSA, sealed bearings, 73mm

**řídítka**  
Onoff Helium Carbon 0.2, rise: 4.8mm, width: 740mm, 9 backsweep, 0 upsweep, 31.8mm barbore LIZARD DSP 30.3

**představec**  
Onoff Helium 7075 alloy CNC, 31.8mm barbore, rise: +/-5, length: sizes S/M: 60mm, size L: 70mm, size XL: 80mm

**sedlovka**  
Onoff Helium Carbon 0-R VFLEX, diameter 27.2mm, length 400mm

**sedlo**  
Fizik Antares R7

**náboj přední**  
Mavic Boost 15x110mm, IS 6 bolts

**náboj zadní**  
Mavic Boost 12x148mm, 24T Ratchet system, IS 6 bolts, XD freehub

**řetěz**  
Sram XX1 Eagle, 12s, Powerlock

**kazeta**  
Sram XG1299 10-50T, 12s

**dráty**  
Mavic ultralight, bladed, straightpull

**ráfky**  
Mavic Crossmax SL Ultimate Carbon 29, 25mm internal width, hookless, UST tubeless, 28 spokes

**pláště**  
Maxxis Ikon 29x2.20, 3CMaxx Speed compound, tubeless ready, 120TPI, folding bead

**obj.c.**  
010.21033

**přední brzda**  
Sram Level Ultimate, 2 piece caliper, Centerline 160mm IS 6 bolts one-piece rotor, steel-backed organic pad, titanium hardware

**zadní brzda**

Sram Level Ultimate, 2 piece caliper, Centerline 160mm IS 6 bolts one-piece rotor, steel-backed organic pad, titanium hardware

**omotávka**

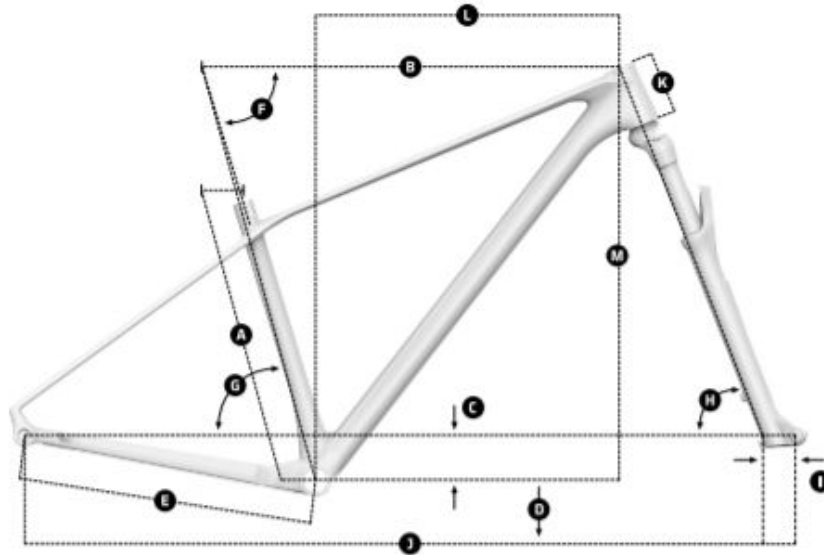
Maxxis Ikon 29x2.20, 3CMaxx Speed compound, tubeless ready, 120TPI, folding bead

**převodník**

34T, CNC-machined alloy, X-SYNC 2

**patka k přehazovačce**

Sram UDH

**Geometrie****GEOMETRY**

Size	S	M	L	XL
<b>A</b> Seat Tube Length	390 mm	420 mm	470 mm	510 mm
<b>B</b> Top Tube Length	590 mm	611mm	632 mm	650 mm
<b>C</b> Bottom Bracket Drop	-65 mm	-65 mm	-65 mm	-65 mm
<b>D</b> Bottom Bracket Height	305 mm	305 mm	305 mm	305 mm
<b>E</b> Chainstay Legth	430 mm	430 mm	430 mm	430 mm
<b>F</b> Seat Tube Angle, Actual	73°	73°	73°	73°
<b>G</b> Seat Tube Angle, Effective	74.5°	74.5°	74.5°	74.5°
<b>H</b> Head Tube Angle	68.5°	68.5°	68.5°	68.5°
<b>I</b> Fork Offset	44 mm	44 mm	44 mm	44 mm
<b>J</b> Wheelbase	1107 mm	1128 mm	1150 mm	1170 mm
<b>K</b> Head Tube Length	85 mm	90 mm	100 mm	115 mm
<b>L</b> Reach	425 mm	444 mm	463 mm	477 mm
<b>M</b> Stack	598 mm	602 mm	611 mm	625 mm