

# F-PODIUM DC CARBON, BLUE/WHITE/ORANGE, 2021

obj. č.: 010.21049



Doporučená cena  
**129.999 Kč**

## Technické specifikace

<b>barva rámečku</b> blue/white/orange	<b>vyřáběné velikosti</b> S 390mm / M 420mm / L 470mm / XL 510mm
<b>hmotnost</b> 12,4 Kg	<b>rám</b> F-Podium 29 Stealth Air Full Carbon, XCO Optimized Zero Suspension System, 100mm, XC Forward Geometry, Carbon Monoblock upper link, BSA bottom bracket, tapered head tube, HHG internal cable routing, dedicated 1X drivetrain design, Boost 12x148mm rear axle, shock mudguard, postmount rear brake mount.
<b>vidlice</b> Rockshox SID Select RL 29, 120mm, Charger, Debonair, tapered steerer tube, Boost 15x110mm axle, 35mm tapered aluminum stanchions, offset 44mm. Settings: OneLock 2 position remote compression (open/lock), low-speed rebound, air preload	<b>hlavové složení</b> Acros AZX-239 R1 Block Lock, ZS44/28.6 top, ZS56/40 bottom
<b>přehazovačka</b> Sram GX Eagle, Type 3 roller bearing clutch, cage lock, 1x12s, X-Actuation 1:1	<b>řazení</b> Sram Trigger SX Eagle, 12s, X-Actuation 1:1
<b>brzdové páčky</b> Sram Level T, Direct Link actuation, tooled reach adjust, lever pivot bushings	<b>kličky</b> Truvativ Stylo 6K Eagle, 12s, Boost, DUB axle, Direct Mount chain ring, S size: 170mm, M/L/XL size: 175mm
<b>středové složení</b> Sram DUB BSA, sealed bearings, 73mm	<b>řídítka</b> Onoff Sulfur 0.2, double butted 6061 alloy, rise: 4.8mm, width: 760mm, 9 backsweep, 0 upsweep, 31.8mm barbore Onoff Twin, 1lock-on, 135mm
<b>představec</b> MDK, 6061 T6 Alloy, 31.8mm barbore, rise: +/-5, length: sizes S/M: 50mm, size L: 60mm, size XL: 70mm	<b>sedlovka</b> Onoff Pija dropper internal, diameter 31.6mm, S size: 337x100mm, M/L/XL size 387x125mm
<b>sedlo</b> Fizik Antares R7	<b>náboj přední</b> DT 370, Boost 15x110mm, IS 6 bolts
<b>náboj zadní</b> DT 370, Boost 12x148mm, 3 Pawl system, IS 6 bolts	<b>řetěz</b> Sram SX Eagle, 12s, Powerlock
<b>kazeta</b> Sram PG-1230, 11-50T, 12s	<b>dráty</b> DT Champion, straightpull
<b>ráfky</b> DT Swiss X1900 Spline 29, 25mm internal width, sleeved aluminum, tubeless ready, 28 spokes	<b>pláště</b> Maxxis Rekon Race 29x2.35, EXO protection, tubeless ready, 120TPI, folding bead
<b>obj.c.</b> 010.21049	<b>tlumič</b> Rockshox SID Select+ RLR Debonair, 185x47.5mm. Settings: OneLock 2 position remote compression (open/lock), low-speed rebound, air preload. Trunnion top mount, 22.2x10mm bottom bushings

**přední brzda**

Sram Level T, 2 piece caliper, Centerline 180mm IS 6 bolts one-piece rotor, steel-backed organic pad

**zadní brzda**

Sram Level T, 2 piece caliper, Centerline 160mm IS 6 bolts one-piece rotor, steel-backed organic pad

**omotávka**

Maxxis Rekon Race 29x2.35, EXO protection, tubeless ready, 120TPI, folding bead

**nastavení tlumiče**

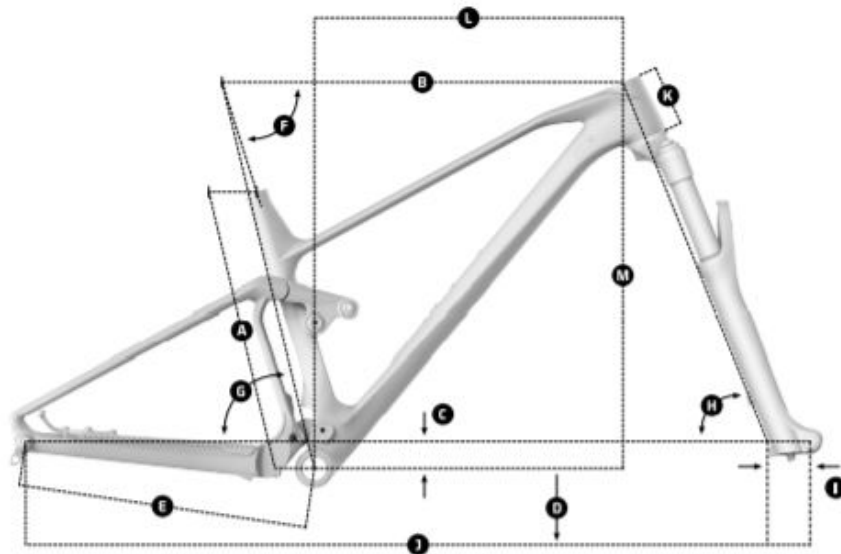
Light compression, medium rebound, Lockout 430, 1 Token

**převodník**

34T, steel, X-Sync 2

**patka k přehazovačce**

Sram UDH

**Geometrie****GEOMETRY**

Size	S	M	L	XL
<b>A</b> Seat Tube Length	390 mm	420 mm	470 mm	510 mm
<b>B</b> Top Tube Length	583 mm	603 mm	629 mm	654 mm
<b>C</b> Bottom Bracket Drop	-31 mm	-31 mm	-31 mm	-31 mm
<b>D</b> Bottom Bracket Height	337 mm	337 mm	337 mm	337 mm
<b>E</b> Chainstay Legth	432 mm	432 mm	432 mm	432 mm
<b>F</b> Seat Tube Angle, Actual	70.8°	70.8°	70.8°	70.8°
<b>G</b> Seat Tube Angle, Effective	75.1°	75.1°	75.1°	75.1°
<b>H</b> Head Tube Angle	66.8°	66.8°	66.8°	66.8°
<b>I</b> Fork Offset	44 mm	44 mm	44 mm	44 mm
<b>J</b> Wheelbase	1146 mm	1167 mm	1191 mm	1217 mm
<b>K</b> Head Tube Length	85 mm	90 mm	100 mm	115 mm
<b>L</b> Reach	430 mm	450 mm	470 mm	490 mm
<b>M</b> Stack	577mm	582mm	591 mm	605mm