

PRIME R (SPE), CHERRY RED/BLACK, 2022

obj. č.: 010.22142SPE



Doporučená cena

119.599 Kč

Akční cena

89.999 Kč

Technické specifikace

vyráběné velikosti XS: 380mm / S: 390mm / M: 430mm / L: 470mm / XL: 510mm	hmotnost 22,8 Kg
rám Prime Xtralite 6061 Full Butted Alloy, Forward Geometry, internal non-removable battery, tapered head tube, Boost 12x148mm rear axle, integrated dropout speed sensor	vidlice Marzocchi Z2 29 Rail, 120mm, tapered steerer tube, Boost 15x110mm axle, 44mm offset. Settings: sweep adjust compression, Low-speed rebound, air preload
hlavové složení Onoff Saturn tapered for 1-1/8" to 1-1/2" head tube, ACB sealed bearings, top 41x30.2x7x45°x45°, bottom 51.9x40x8x45°x45°	přehazovačka Sram SX Eagle, Type 3 roller bearing clutch, cage lock, long cage, 1x12s, X-actuation 1:1
řazení Sram Trigger SX Eagle, 12s, X-Actuation 1:1, single click	brzdové páčky Sram G2 R, tool-free reach adjust
kliky Race Face Aeffect ebike, 165mm	řídítka Onoff Sulfur 1.0 double butted 6061 alloy, rise: 20mm, width: 800mm, 9° backsweep, 5° upsweep, 31.8mm barbore
představec Onoff Sulfur FG 30mm 0°, 6061 forged alloy, 31.8mm barbore	sedlovka Onoff Pija dropper internal, diameter 31.6mm, S size: 387x125mm, M size: 425x150mm, L/XL size: 465x170mm
sedlo FIZIK Terra Aidon X5 145mm	náboj přední Formula DC711, Boost 15x110mm, sealed bearings, IS 6 bolts
náboj zadní Formula EHL148 Boost 12x148mm, sealed bearings, IS 6 bolts	řetěz Sram SX Eagle, 12s, Powerlock
kazeta Sram PG-1210, 11-50T, 12s	dráty CN round stainless steel
ráfky MDK-HP1 29, 30mm internal width, tubeless ready, 32 spokes	pláště Maxxis Rekon 29x2.6, tubeless ready, dual compound, EXO protection, 60TPI, folding bead, Maxxis Rekon 29x2.6, tubeless ready, dual compound, EXO protection, 60TPI, folding bead
a151 010.22142SPE	obj.c. 010.22142SPE
gripy Onoff Diamond, 1lock-on, 135mm	přední brzda Sram G2 R, 4-piston caliper, Centerline 200mm IS 6 bolts one-piece rotor, steel-backed organic pads

zadní brzda

Sram G2 R, 4-piston caliper, Centerline 200mm IS 6 bolts one-piece rotor, steel-backed organic pads

převodník

Sram X-Sync 2 Eagle 34T, steel, narrow-wide, 104 BCD


patka k přehazovačce

Mondraker M068

motor+baterie

Bosch Performance Line CX Cruise (25Km/h) GEN4 BS3 , Bosch Powertube 750Wh, Bosch Kiox 300

Geometrie

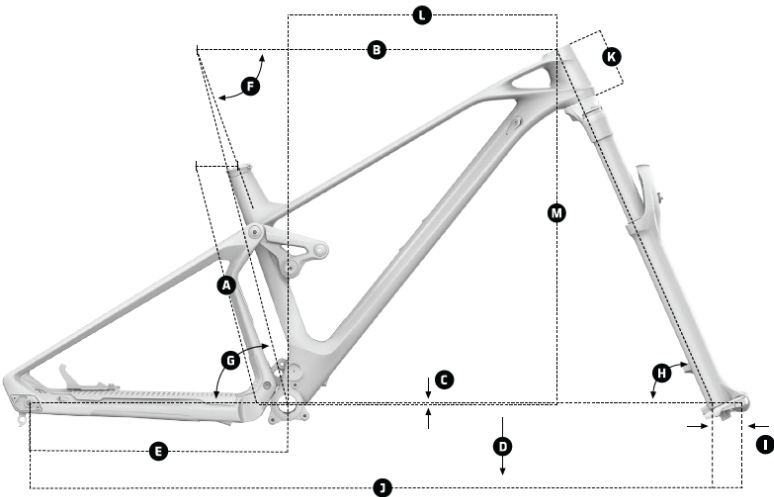

A	Seat Tube Length
B	Top Tube Length
C	Bottom Bracket Drop
D	Bottom Bracket Height
E	Chainstay Length
F	Seat Tube Angle, Actual
G	Seat Tube Angle, Effective
H	Head Tube Angle
I	Fork Offset
J	Wheelbase
K	Head Tube Length
L	Reach
M	Stack

**e-MTB TRAIL
PRIME 29**

Size	XS	S	M	L	XL
A Seat Tube Length	380 mm	390 mm	430 mm	470 mm	510 mm
B Top Tube Length	600 mm	615 mm	645 mm	670 mm	700 mm
C Bottom Bracket Drop	-60 mm	-60 mm	-60 mm	-60 mm	-60 mm
D Bottom Bracket Height	318 mm	318 mm	318 mm	318 mm	318 mm
E Chainstay Legth	455 mm	455 mm	455 mm	455 mm	455 mm
F Seat Tube Angle, Actual	73.5°	73.5°	73.5°	73.5°	73.5°
G Seat Tube Angle, Effective	73.5°	73.5°	73.5°	73.5°	73.5°
H Head Tube Angle	69°	69°	69°	69°	69°
I Fork Offset	51 mm	51 mm	51 mm	51 mm	51 mm
J Wheelbase	1138mm	1153 mm	1183 mm	1210 mm	1240 mm
K Head Tube Length	110 mm	110 mm	110 mm	130 mm	130 mm
L Reach	410 mm	425 mm	455 mm	480 mm	505 mm
M Stack	640 mm	640 mm	640 mm	658 mm	658 mm

Fotogalerie

