

# PODIUM CARBON 29 (SPE), TRANSLUCENT RED CARBON/CHERRY RED, 2022

obj. č.: 010.22032SPE



Doporučená cena

**103.999 Kč**

## Technické specifikace

|                                                                                                                                                                                                                           |                                                                                                                                                                                                         |
|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>vyráběné velikosti</b><br>S: 390mm / M: 420mm / L: 470mm / XL: 510mm                                                                                                                                                   | <b>hmotnost</b><br>9,6 Kg                                                                                                                                                                               |
| <b>rám</b><br>Podium 29 Stealth Air Carbon, XC Forward Geometry, BSA bottom bracket, tapered head tube, HHG internal cable routing, Boost 12x148mm rear axle, dedicated 1X drivetrain design, Flatmount brake compatible, | <b>vidlice</b><br>Fox 32 Step Cast Float Grip Evol Performance, 100mm, tapered steerer tube, 15x110mm Boost axle, offset 44mm. Settings: remote 2pos Push-unlock, rebound, air preload. Fox single pull |
| <b>hlavové složení</b><br>Onoff Titan tapered for 1-1/8" to 1-1/2" head tube, ACB sealed bearings, top 41.8x30.5x8x45°x45°, bottom 51.9x40x8x45°x45°                                                                      | <b>přehazovačka</b><br>Sram GX Eagle, Type 3 roller bearing clutch, cage lock, 1x12s, X-Actuation 1:1                                                                                                   |
| <b>řazení</b><br>Sram Trigger GX Eagle, 12s, X-Actuation 1:1                                                                                                                                                              | <b>brzdové páčky</b><br>Sram Level TL, Direct Link actuation, tooled reach adjust, lever pivot bushings                                                                                                 |
| <b>kliky</b><br>Sram GX Eagle, Boost, DUB axle, Direct Mount chain ring, S size: 170mm, M/L/XL size: 175mm                                                                                                                | <b>středové složení</b><br>Sram DUB BSA, sealed bearings, 73mm                                                                                                                                          |
| <b>řídítka</b><br>Onoff Sulfur 0.2, double butted 6061 alloy, rise: 4.8mm, width: 760mm, 9° backsweep, 0° upsweep, 31.8mm barbare                                                                                         | <b>představec</b><br>MDK, 6061 T6 Alloy, 31.8mm barbare, rise: +/-5°, length: sizes S/M: 60mm, size L: 70mm, size XL: 80mm                                                                              |
| <b>sedlovka</b><br>Onoff Sulfur 0-R, 6061 T6 Alloy, 3D forged, diameter 27.2mm, length 400mm                                                                                                                              | <b>sedlo</b><br>Fizik Antares R7                                                                                                                                                                        |
| <b>náboj přední</b><br>Mavic, Boost 15x110mm, IS 6 bolts                                                                                                                                                                  | <b>náboj zadní</b><br>Mavic, Boost 12x148mm, ID360 Ratched system, IS 6 bolts                                                                                                                           |
| <b>řetěz</b><br>Sram NX Eagle, 12s, Powerlock                                                                                                                                                                             | <b>kazeta</b><br>Sram XG-1275, 10-50T, 12s                                                                                                                                                              |
| <b>dráty</b><br>Mavic straightpull duble butted, contactless lacing                                                                                                                                                       | <b>ráfky</b><br>Mavic Crossmax 29, 25mm internal width, welded rim, hookless, tubeless ready, 24 spokes                                                                                                 |
| <b>pláště</b><br>Maxxis Rekon Race 29x2.35, EXO protection, tubeless ready, 120TPI, folding bead, Maxxis Rekon Race 29x2.35, EXO protection, tubeless ready, 120TPI, folding bead                                         | <b>a151</b><br>010.22032SPE                                                                                                                                                                             |
| <b>obj.c.</b><br>010.22032SPE                                                                                                                                                                                             | <b>gripy</b><br>Onoff Diamond, 1lock-on, 135mm                                                                                                                                                          |


**přední brzda**  
Sram Level TL, 2 piece caliper, Centerline 160mm IS 6 bolts one-piece rotor, steel-backed organic pad

**převodník**  
34T, CNC-machined alloy, X-SYNC 2

**zadní brzda**  
Sram Level TL, 2 piece caliper, Centerline 160mm IS 6 bolts one-piece rotor, steel-backed organic pad

**patka k přehazovačce**  
Sram UDH

Geometrie

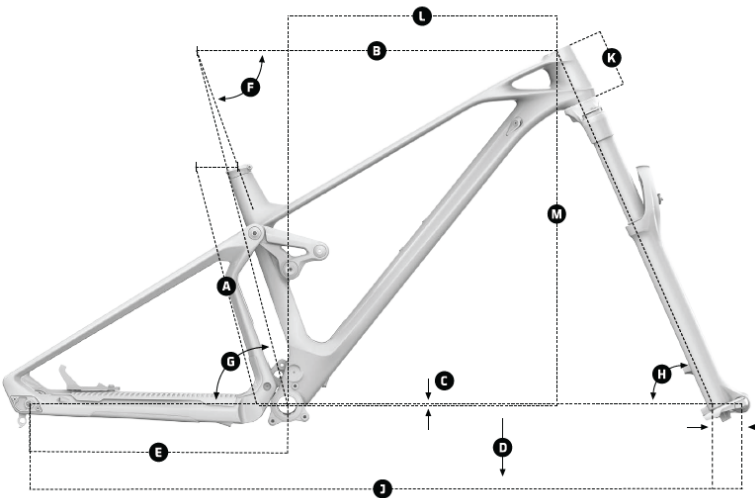

|   |                            |
|---|----------------------------|
| A | Seat Tube Length           |
| B | Top Tube Length            |
| C | Bottom Bracket Drop        |
| D | Bottom Bracket Height      |
| E | Chainstay Length           |
| F | Seat Tube Angle, Actual    |
| G | Seat Tube Angle, Effective |
| H | Head Tube Angle            |
| I | Fork Offset                |
| J | Wheelbase                  |
| K | Head Tube Length           |
| L | Reach                      |
| M | Stack                      |

XC RACE  
PODIUM

| Size                         | S       | M       | L       | XL      |
|------------------------------|---------|---------|---------|---------|
| A Seat Tube Length           | 390 mm  | 420 mm  | 470 mm  | 510 mm  |
| B Top Tube Length            | 590 mm  | 611mm   | 632 mm  | 650 mm  |
| C Bottom Bracket Drop        | -65 mm  | -65 mm  | -65 mm  | -65 mm  |
| D Bottom Bracket Height      | 305 mm  | 305 mm  | 305 mm  | 305 mm  |
| E Chainstay Legth            | 430 mm  | 430 mm  | 430 mm  | 430 mm  |
| F Seat Tube Angle, Actual    | 73°     | 73°     | 73°     | 73°     |
| G Seat Tube Angle, Effective | 74.5°   | 74.5°   | 74.5°   | 74.5°   |
| H Head Tube Angle            | 68.5°   | 68.5°   | 68.5°   | 68.5°   |
| I Fork Offset                | 44 mm   | 44 mm   | 44 mm   | 44 mm   |
| J Wheelbase                  | 1107 mm | 1128 mm | 1150 mm | 1170 mm |
| K Head Tube Length           | 85 mm   | 90 mm   | 100 mm  | 115 mm  |
| L Reach                      | 425 mm  | 444 mm  | 463 mm  | 477 mm  |
| M Stack                      | 598 mm  | 602 mm  | 611 mm  | 625 mm  |

Fotogalerie

