

F-PLAY 24, ORANGE/BLACK, 2023

obj. č.: 010.23210



Technické specifikace

vyráběné velikosti One size: 300mm	rám F-Play 24 6061 Alloy Stealth evo, hydroformed tubing, Zero Suspension System, 120mm travel, one piece bolt-on upper link, integrated internal non-removable battery, Tapered head tube, HHG internal cable routing, BSA bottom bracket, QR 9mm rear axle, 1x drivetrain compatible
vidlice X-Fusion Velvet RL 26, 100mm, air spring, tapered steerer tube, 9x100mm axle, 32mm aluminum stanchions, 41mm offset. Settings: lockout, rebound, air preload	hlavové složení Onoff Saturn tapered for 1-1/8" to 1-1/2" head tube, ACB sealed bearings, top 41x30.2x7x45°x45°, bottom 51.9x40x8x45°x45°
přehazovačka Sram GX, 10s, short cage, X-actuation 1:1	řazení Sram trigger GX 10s, X-actuation 1:1
brzdové páčky Sram Level, tooled reach adjust, lever pivot bushings	kliky Samox DM 30T steel, 152mm
středové složení BSA, 73mm	řídítka MDK XC 1.0, 6061 alloy, rise: 25mm, width: 680mm, 9° backsweep, 5° upsweep, 31.8mm barbare
představec Onoff Sulfur FG 30mm 0°, 6061 forged alloy, 31.8mm barbare	sedlovka MDK XC 0-R, 6061 T6 Alloy, diameter 31.6mm, length 300mm
sedlo SDG Fly JR	náboj přední Formula DC20LW, 9x100mm, cup cone ball bearings, IS 6 bolts
náboj zadní Mahle-Ebikemotion X-35	řetěz Sram PC1031 10s, Powerlock
kazeta Sram PG 1020 11-36T, 10s	dráty CN round stainless steel
ráfky MDK-XP1 24 TLR, 25mm internal width, tubeless ready, 32 spokes	pláště Kenda Booster 24x2.4 single compound 30TPI, wire bead
a151 010.23210	obj.c. 010.23210
gripy Onoff Twin, 1lock-on	tlumič X-Fusion 02PRO R, 210x47.5mm. Settings: low-speed rebound, air preload. 45x8mm top and bottom bushings
přední brzda Sram Level, 2 piece caliper, Centerline 160mm IS 6 bolts one-piece rotor, steel-backed organic pad	zadní brzda Sram Level, 2 piece caliper, Centerline 160mm IS 6 bolts one-piece rotor, steel-backed organic pad


nastavení tlumiče
A-Tune light compression

převodník
30T, steel

patka k přehazovačce
Mondraker M073

motor+baterie
Mahle-Ebikemotion X-35, Mahle-Ebikemotion Internal 250Wh, Mahle-Ebikemotion

Geometrie

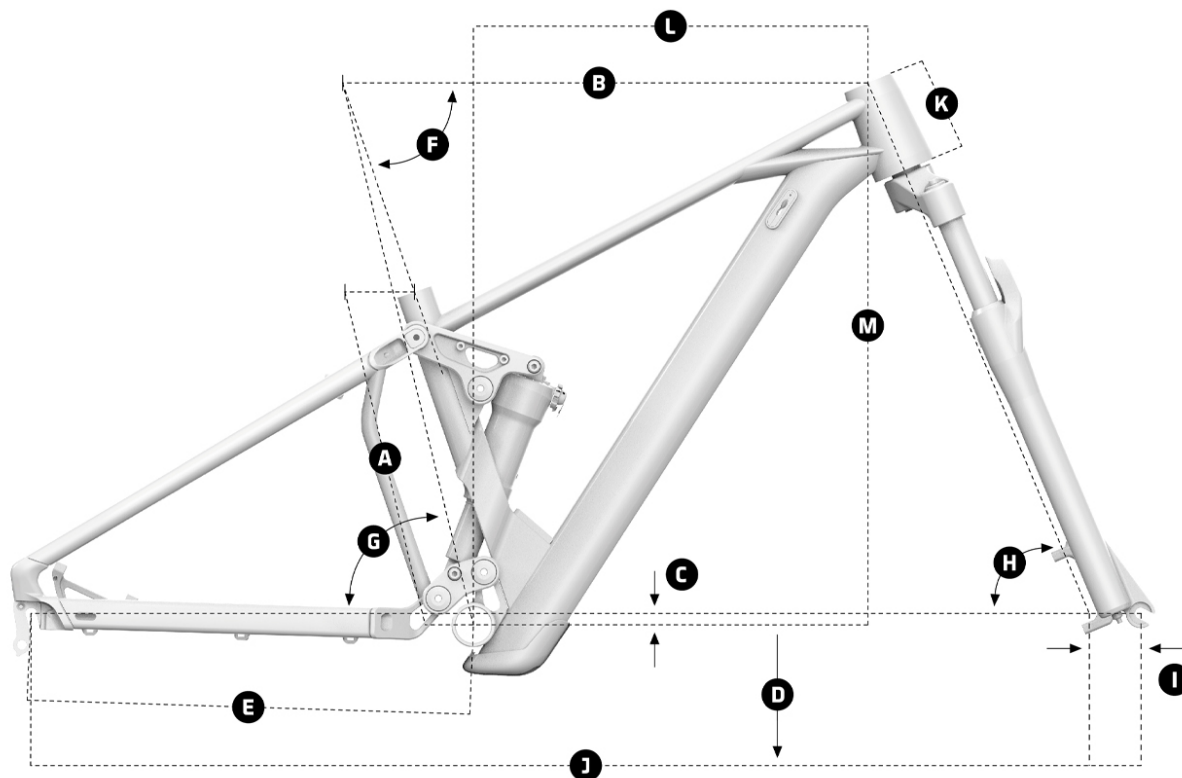

e-KIDS / YOUTH **F-PLAY 26 / 24**

Size	26	24
A Seat Tube Length	350 mm	320 mm
B Top Tube Length	550 mm	525 mm
C Bottom Bracket Drop	-10 mm	-10 mm
D Bottom Bracket Height	320 mm	295 mm
E Chainstay Legth	420 mm	420 mm
F Seat Tube Angle, Actual	71°	71°
G Seat Tube Angle, Effective	76°	76°
H Head Tube Angle	67°	67°
I Fork Offset	41 mm	40 mm
J Wheelbase	1104 mm	1050 mm
K Head Tube Length	90 mm	90 mm
L Reach	415 mm	375 mm
M Stack	545 mm	513 mm

Fotogalerie

