

PLAY 20, BLACK/MARLIN BLUE, 2022

obj. č: 010.22291




Doporučená cena

59.799 Kč

Technické specifikace

vyráběné velikosti One size: 260mm	rám Play 20 6061 Alloy Stealth evo, hydroformed tubing, integrated internal non-removable battery, Tapered head tube, HHG internal cable routing, BSA bottom bracket, QR 9mm rear axle, 1x drivetrain compatible
vidlice MDK 20 Kid, Rigid alloy Stealth stanchions, Post Mount disc brake mount	hlavové složení Onoff Saturn tapered for 1-1/8" to 1-1/2" head tube, ACB sealed bearings, top 41x30.2x7x45°x45°, bottom 51.9x40x8x45°x45°
přehazovačka Microshift M26S, 9s, short cage	řazení Microshift Mezzo TS39-9, 9s
brzdové páčky Sram Level, tooled reach adjust, lever pivot bushings	kliky Prowheel, Direct mount chain ring, 114mm
středové složení Prowheel BSA, 73mm	řídítka MDK XC 1.0, 6061 alloy, rise: 25mm, width: 580mm, 9° backsweep, 5° upsweep, 31.8mm barbare
představec Onoff Sulfur FG 30mm 0°, 6061 forged alloy, 31.8mm barbare	sedlovka MDK XC 0-R, 6061 T6 Alloy, diameter 31.6mm, length 250mm
sedlo SDG Fly JR	náboj přední Formula DC20LW, 9x100mm, cup & cone ball bearings, IS 6 bolts
náboj zadní Mahle-Ebikemotion X-35	řetěz Sram PC951 9s, Powerlock
kazeta Microshift Mezzo 11-34T, 9s	dráty CN round stainless steel
ráfky MDK-XP1 20 TLR, 25mm internal width, tubeless ready, 32 spokes	pláště Kenda Booster 20x2.4 single compound 30TPI, wire bead, Kenda Booster 20x2.4 single compound 30TPI, wire bead
a151 010.22291	obj.c. 010.22291
gripy Kids	přední brzda Sram Level, 2 piece caliper, Centerline 160mm IS 6 bolts one-piece rotor, steel-backed organic pad
zadní brzda Sram Level, 2 piece caliper, Centerline 160mm IS 6 bolts one-piece rotor, steel-backed organic pad	převodník 28T, steel

Geometrie

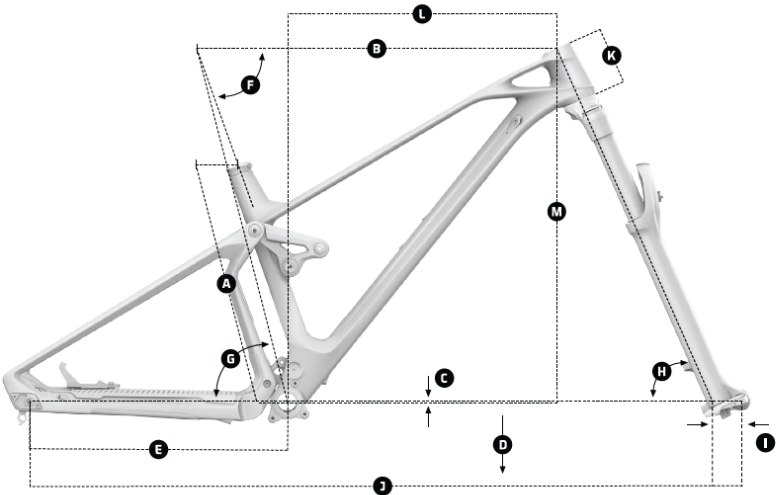

A	Seat Tube Length
B	Top Tube Length
C	Bottom Bracket Drop
D	Bottom Bracket Height
E	Chainstay Length
F	Seat Tube Angle, Actual
G	Seat Tube Angle, Effective
H	Head Tube Angle
I	Fork Offset
J	Wheelbase
K	Head Tube Length
L	Reach
M	Stack

e-KIDS
PLAY 26 / 24 / 20

Size	26	24	20
A Seat Tube Length	350 mm	320 mm	260 mm
B Top Tube Length	567 mm	517 mm	475 mm
C Bottom Bracket Drop	-30 mm	-30 mm	-15 mm
D Bottom Bracket Height	300 mm	280 mm	240 mm
E Chainstay Legth	420 mm	405 mm	355 mm
F Seat Tube Angle, Actual	72°	72°	72°
G Seat Tube Angle, Effective	72°	72°	72°
H Head Tube Angle	68°	68°	68°
I Fork Offset	40 mm	40 mm	40 mm
J Wheelbase	1060 mm	994 mm	903 mm
K Head Tube Length	100 mm	100 mm	100 mm
L Reach	390 mm	350 mm	340 mm
M Stack	546 mm	537 mm	387 mm

Fotogalerie

